

FINAL REPORT

UPDATED CITYWIDE PAVEMENT MANAGEMENT PLAN

***OC Go
2026-2033***



Submitted to:

***City of Westminster, CA
June 17, 2026***



June 17, 2026

Mr. Jake Ngo, P.E.
Director of Public Works
CITY OF WESTMINSTER
8200 Westminster Boulevard
Westminster, CA 92683

Subject: City of Westminster – OCTA Pavement Management Compliance Report 2026

Dear Jake:

As part of the 2026 Update of the Pavement Management Plan (PMP) for the City of Westminster, *Bucknam Infrastructure Group, Inc.* is pleased to submit the PMP reporting required by the Orange County Transportation Authority (OCTA). This data/report will be submitted to OCTA as part of the City's required biennial PMP prior to June 30, 2026.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Pavement Management Plan Certification**
- **Pavement Management Plan that includes the following:**
 - **Average Pavement Conditions For Each Segment in the Network (PCI Report)**

The Pavement Condition Index report shows the present condition of each street in the pavement network (Arterials and Locals). In addition, the report shows the basic geometry of each street segment.
 - **Seven-year Projected PCI Under Existing Funding Levels**

This report identifies the projected PCI's based on the local agencies current funding programs. This report details the PCI projects for the entire network, Master Plan of Arterial Highways (MPAH) roadways and Local streets.
 - **Seven-year Plan for Road Maintenance and Rehabilitation (Forecast Maintenance Report – FMR)**

The FMR projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for all streets. This includes all scheduled projects provided by the City for fiscal years 2026 through 2033.
 - **Alternative Funding Levels**

OCTA has requested two reports indicating the necessary funding to maintain the City's current weighted average PCI as well as the necessary funding to improve the weighted average PCI by one PCI point over the next seven years.
 - **Backlog by Fiscal Year (re: unfunded restoration, rehabilitation and reconstruction)**

- **Percentage of total network in each of the five condition categories based on centerline mileage**
- **Local Match Reduction Reporting**
 - ❖ In order to be eligible for Local Match Reduction of 10%, the following must be submitted:
 - Measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one PCI point.
 - No reduction in the overall weighted (by area) average PCI in the MPAH or local street categories
 - or -
 - Have road pavement conditions, for the overall network, during the previous reporting period within the highest twenty (20%) of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in “good condition”.
 - ❖ **GIS Digital Data**
 - ❖ **Quality Assurance / Quality Control (QA/QC) Plan**
 - ❖ **Pavement Management Data Files (electronic Westminster.e70 file format)**
 - ❖ **GIS Maps / Current Conditions**

All comments received from the City have been incorporated in the reports that follow. It has been a pleasure working with you and the City on updating your Pavement Management Plan. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.



Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services



3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

AGENCY SUBMITTAL TABLE OF CONTENTS

I.	Pavement Management Plan Certification.....	2
II.	Executive Summary	3
III.	Background (City of Westminster).....	4
IV.	Current Pavement Conditions (PCI).....	7
V.	Projected Pavement Conditions (PCI).....	8
VI.	Alternative Funding Levels.....	9
	a. Maintain Existing Average Network PCI	9
	b. Improve Average Network PCI.....	9
VII.	Current and Projected Backlog by Year of Pavement Maintenance Needs	9
VIII.	Centerline Mileage.....	10
IX.	Percentage of Network in Each of Five Condition Categories Based on Centerline mileage	10
X.	Reduction in M2 Local Match	11
XI.	Appendix A – Seven-Year Road Maintenance and Rehabilitation Plan Based on Current or Expected Funding Level	12
XII.	Appendix B – Complete Street Listing Current Conditions.....	13
XIII.	Appendix C – GIS Digital Data	14
XIV.	Appendix D – Quality Assurance / Quality Control Plan.....	16
	• Introduction	16
	• Objectives	16
	• Structure of QA/QC Plan.....	16
	• Condition Survey Procedures.....	17
	• Accuracy Required for Data Collection	18
	• Random and Systematic Re-Inspections.....	18
	• PCI Comparison with Past Surveys.....	19
	• Inspector Qualifications and Experience	19
	• Safety Procedures.....	20
XV.	Appendix E – Pavement Management Data Files.....	21
XVI.	Appendix F – GIS Maps – Current Conditions.....	22



CITY OF WESTMINSTER PAVEMENT MANAGEMENT PLAN

- part of -

**COUNTYWIDE PAVEMENT MANAGEMENT PLAN GUIDELINES
(OCTA Guideline – April 2026)**

Draft

Prepared by: Bucknam Infrastructure Group, Inc.
Submitted to OCTA: June 30, 2026

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

I. Pavement Management Plan Certification

The City of Westminster, CA certifies that it has a Pavement Management Plan in conformance with the criteria stated in the Orange County Transportation Authority Ordinance No. 3. This ordinance requires that a Pavement Management Plan be in place and maintained to qualify for allocation of revenues generated from renewed Measure M (M2).

The plan was developed by Bucknam Infrastructure Group, Inc. using MicroPAVER, a pavement management system conforming to American Society for Testing and Materials (ASTM) Standard D6433, and contains, at a minimum, the following elements:

- Inventory of MPAH and Local routes reviewed and updated biennially. The last update of the inventory was completed on April, 2026 for the Arterial (MPAH) and April 2026 for the Local streets;
- Assessment of the pavement condition for all routes in the system, updated biennially. The last field review of the pavement condition was completed in April, 2026;
- Percentage of all section of pavement needing:
 - Preventive Maintenance = 29.8%;
 - Rehabilitation = 32.7%;
 - Reconstruction = 0.3%
- Budget needs for preventive maintenance, rehabilitation and/or reconstruction of deficient sections of pavement for:
 - Current biennial period \$13,913,200;
 - Following biennial period \$15,088,600;
- Funds budgeted or available for Preventive Maintenance, Rehabilitation and/or Reconstruction.
 - Current biennial period \$13,000,000;
 - Following biennial period \$13,000,000;
- Backlog by year of unfunded rehabilitation, restoration and reconstruction needs (See page 9);
- The Pavement Management Plan is consistent with countywide pavement condition assessment standards as described in the OCTA Countywide Pavement Management Plan Guidelines adopted by the OCTA Board of Directors.

*An electronic copy of the Pavement Management Plan (with MicroPAVER or StreetSaver compatible files) has been or will be submitted with the certification statement. A copy of this certification is being provided to the Orange County Transportation Authority.

Submitted by:

Name (Print)

City of Westminster
Jurisdiction

Signed

Date

Director of Public Works
Title

II. EXECUTIVE SUMMARY

2026 UPDATE OF PAVEMENT MANAGEMENT PLAN (PMP)

As the City of Westminster’s infrastructure continues to mature, Public Works priorities such as Local street overlay rehabilitation and proactive Arterial CIP maintenance are key projects to City staff. With the City mostly built-out, wear and tear on the infrastructure will occur at an ever-increasing rate. Pavement aging through annual weathering, dynamic and static vehicle loading, and increased usage, compounded with the increased cost of performing maintenance and rehabilitation, add to the yearly operational budget of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

Over the past sixteen (16) years, the City has proactively sustained the overall condition status as well as greatly reduced its deferred maintenance burdens. The City’s overall weighted PCI is 80.3 which is level with the Orange County PCI average of 79. The optimal goal for the City is to reach the industry standard PCI range that is between 82 to 85. Funding the Westminster PMP over the next seven years will be manageable and achievable based on city management proactivity, frequent inspections, and biennial budgetary review.

In the upcoming years, as the City continues to build upon this study through future inspections and maintenance work history, Westminster pavement data will continue to provide reliable data. This will enhance the PMP through detailed Orange County Transportation Authority (OCTA) OC Go funding analysis, City specific budgetary reporting and level of service reporting.

The Westminster PMP has been developed to assist City personnel by providing current data on the City’s street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City’s 2025 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all designated arterial, collector (MPAH) and residential routes to assist the City in being compliant with OCTA – OC Go April 2026 guidelines. Additionally, we updated the City’s unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of MyRoads® and ESRI ArcGIS.

Bucknam Infrastructure Group reviewed the City’s previous maintenance efforts and the current 2026-27 street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The result of these work efforts is in this report.

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

III. BACKGROUND (CITY OF WESTMINSTER)

In late 1990, voters throughout Orange County approved a ½-cent sales tax for transportation improvements known as OC Go, formerly known as Measure M2. Funding for streets and roads are included within the sales tax and are distributed to local agencies through both formula and a competitive method. In late 2006, the renewal of OC Go was approved by voters that would continue the ½-cent sales tax for thirty additional years, starting in 2011.

The primary goal of this report is to comply with established guidelines from OCTA to ensure that field data collection and reporting efforts performed by outside consultants or local agency staff are consistent. This is required in order that funding allocations can be reviewed and based on agency comparable pavement conditions. Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

- a PMP report consistent with OCTA OC Go guidelines
- the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;
- a ranked list of all streets, or segments of streets, by condition within the network;
- rehabilitation/maintenance needs of each street segment by year;
- an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;
- optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;
- prediction of the life-cycle performance of the City's pavement network and each individual street section; and
- pavement condition data and analysis presented in GIS through MyRoads® and ESRI ArcGIS

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecasted maintenance recommendations we worked with Westminster Public Works/Engineering staff in identifying unit costs for all maintenance practices used on an annual basis. Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the Westminster pavement network is \$514,553,100. This value clearly indicates that the City's pavement network is the most valuable and essential asset to Westminster. The City's use of slurry seal, AC Overlay and R&R practices are typically applied at a 5-year, 10-year, and 25-year frequency respectively. These frequencies are typical but the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of Westminster's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City and through our discussions with City staff the conditional data found across the network clearly shows that the City has applied strong, preventative maintenance strategies over the past decade. Pavement management involves frequent preventative maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventative maintenances (such as slurry seal, stop gap, etc.) have limited benefits. More aggressive maintenance applications have to be used.

Our study has shown that key slurry seal and a strong Arterial overlay program will be needed over the next seven years to maintain the network's high level of condition. Currently, the City's two major streets networks (Local & Arterial) hold high weighted PCI values; it is our recommendation that a proactive, common sense overlay program and a continued slurry seal program be scheduled over the next several fiscal years. This will ensure that the citywide weighted PCI will sustain itself and allow for routine slurry seal maintenance to continue. Additionally, through this overlay program it is our recommendation that the MPAH network receive a higher amount of overlay funding.

We have found and recommend the following detailed items which should be reviewed and considered for a proactive approach to the future management of the PMP:

ARTERIAL / COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Arterial (MPAH) street network is currently in "Good" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "Good" network weighted average PCI value. Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 80.9;
- The MPAH network consists of 63.7 centerline miles and 14,516,980 SF of pavement;
- Currently, 33% of the MPAH network (20.9 centerline miles) qualify for slurry seal/stop gap maintenance; 23% of the Arterial network (14.4 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, MPAH maintenance projects should focus on the maintaining the current PCI at a weighted average of 81 over the next 7 years;
 - Maintain the MPAH revenues at an average annual level of \$2.8 Million/yr for the term of the CIP to generate the PCI identified on page 9;
- Develop a proactive fiscal and planned approach to identify MPAH overlay projects based on the deterioration modeling within MicroPAVER;
 - Demonstrated budget shown on page 9 is ample to increase the MPAH weighted PCI of

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

81 after seven years, additionally, the citywide deferred backlog decreases from a level of \$33.2 million to \$31.0 million after seven years; and

- Appropriate MPAH revenues at an average of \$2.8 Million /yr for the term of the seven-year CIP to generate the results identified on page 9 (V. Projected Pavement Conditions (PCI) – Increase PCI Funding); and
- Perform pavement inspections on the MPAH network every two years to build a solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for OC Go.

LOCAL FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Local street network is currently in “Good” condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a “Good” network weighted average PCI value. Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:


- The Local network has a weighted PCI of 80.0;
- The Local network consists of 127.0 centerline miles and 23,720,120 SF of pavement;
- Currently, 52% of the Local network (65.7 centerline miles) qualifies for slurry seal/stop gap maintenance; 12% of the Local network (15.1 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, Local maintenance projects should focus on the maintaining the current PCI above a weighted average of 80 over the next 7 years;
 - Maintain the Local revenues at an average annual level of \$4.6 Million/yr for the term of the CIP to generate the PCI identified on page 9;
- Develop a proactive fiscal and planned approach to identify local overlay projects based on the deterioration modeling within MicroPAVER;
 - Demonstrated budget shown on page 9 is ample to sustain the Local weighted PCI at average above 80.0 after seven years, additionally, the citywide deferred backlog increases from a level of \$33.2 million to \$36.9 million after seven years; and
- Perform pavement inspections on the Local network every four years to build a solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for OC Go.

2026 Citywide Pavement Management Plan – OCTA Submittal Final Report – June 17, 2026

IV. CURRENT PAVEMENT CONDITIONS (PCI)

Rank	Mileage	SF	2026	2024	2022	2020	2018	2016	2014	2012	2010
Art / Coll	63.7	14,516,980	80.9	78.3	77.2	75.8	72.7	74.5	74.7	76.5	71.4
Local	127.0	23,720,120	80.0	85.4	86.3	86.5	83.1	83.5	77.9	79.5	73.5
Citywide	190.7	38,237,100	80.3	82.7	82.9	82.4	79.2	80.1	76.7	78.4	72.7

Table above depicts centerline mileage

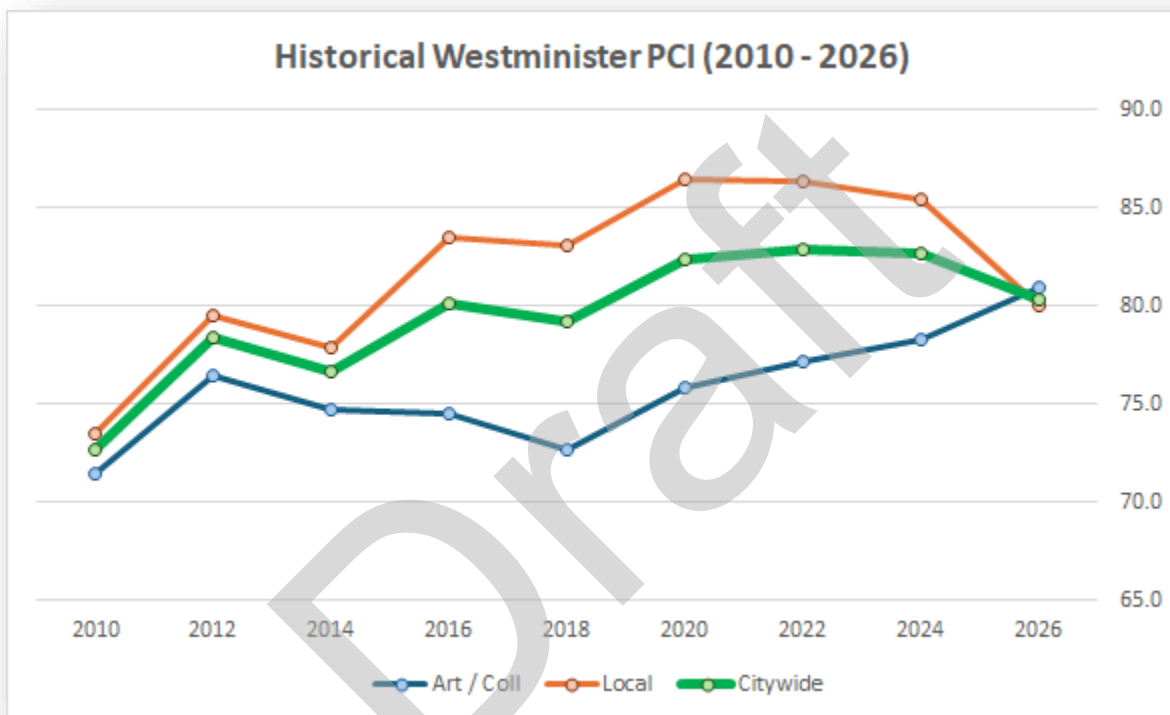


Condition	PCI Range	MPAH	Local	Total	% of Network
Very Good	86-100	26.9	44.1	71.0	37.2%
Good	75-85	13.3	43.5	56.8	29.8%
Fair	60-74	15.1	31.4	46.5	24.4%
Poor	41-59	8.4	7.5	15.9	8.3%
Very Poor	0-40	0.0	0.5	0.5	0.3%
		63.7	127.0	190.7	

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

V. PROJECTED PAVEMENT CONDITIONS (PCI) – CURRENT FUNDING

Fiscal Year	Current Funding	Entire Network	MPAH	Local
Today	~	80.3	80.9	80.0
2026-27	\$6,500,000	81.2	80.0	81.6
2027-28	\$6,500,000	80.3	79.0	80.7
2028-29	\$6,500,000	79.2	77.8	79.7
2029-30	\$6,500,000	79.0	77.4	79.5
2030-31	\$6,500,000	79.0	77.0	79.5
2031-32	\$6,500,000	78.6	77.3	79.0
2032-33	\$6,500,000	79.2	78.7	79.6
Total	\$45,500,000			

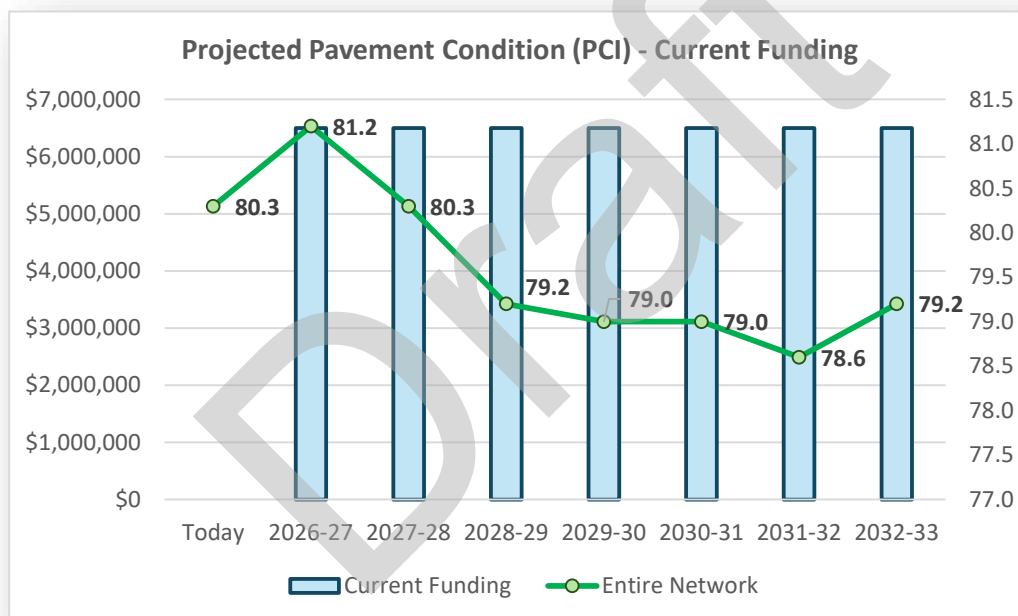

We generated a “Do Nothing” budgetary scenario that demonstrated the following:

- If no maintenance/rehabilitation is applied to the network the overall PCI of 80 will decrease to 71.2 by FY 2033 and the deferred backlog will increase to \$95.1 million. Additionally, deferring maintenance will increase PMP factors such as ride quality, resident complaints, and higher costs.

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

VI. ALTERNATIVE FUNDING LEVELS

Maintain Existing Average Network PCI

Fiscal Year	Maintain PCI Funding	Entire Network	MPAH	Local
Today	~	80.5	81.0	80.2
2026-27	\$6,857,000	81.3	80.5	81.8
2027-28	\$7,115,600	83.6	82.0	83.8
2028-29	\$7,056,400	83.9	82.8	84.0
2029-30	\$7,189,300	82.9	82.4	83.0
2030-31	\$7,243,600	82.0	81.7	82.1
2031-32	\$7,311,700	81.4	80.8	81.6
2032-33	\$7,449,900	80.5	80.3	80.7
Total	\$50,223,500			

Improve Average Network PCI

Fiscal Year	Increase PCI Funding	Entire Network	MPAH	Local
Today	~	80.5	81.0	80.2
2026-27	\$7,224,500	81.6	81.2	82.2
2027-28	\$6,688,700	82.7	81.7	83.0
2028-29	\$7,411,500	84.3	83.2	84.5
2029-30	\$7,677,100	84.1	82.9	84.5
2030-31	\$7,276,000	83.3	82.5	84.2
2031-32	\$7,626,300	82.5	81.7	83.1
2032-33	\$8,199,200	82.0	81.1	82.5
Total	\$52,103,300			

VII. CURRENT AND PROJECTED BACKLOG BY YEAR OF PAVEMENT MAINTENANCE NEEDS

Plan Year	Actual Funding Backlog	Maintain PCI Backlog	Increase PCI Backlog
Current	\$33,205,600	\$33,205,600	\$33,205,600
2026-27	\$30,033,500	\$29,698,100	\$29,357,400
2027-28	\$29,565,400	\$28,506,100	\$28,888,600
2028-29	\$29,344,000	\$28,134,000	\$27,942,200
2029-30	\$28,096,100	\$27,515,400	\$27,129,800
2030-31	\$27,833,200	\$27,001,200	\$26,918,700
2031-32	\$35,592,600	\$34,898,100	\$31,545,600
2032-33	\$40,736,400	\$36,918,700	\$31,002,300

2026 Citywide Pavement Management Plan – OCTA Submittal Final Report – June 17, 2026

DEFERRED MAINTENANCE

Delaying repairs on streets where pavement conditions indicate a need generates deferred maintenance or “backlog”. Deferred maintenance is work that is postponed to a future budget cycle, or until funds are available. As maintenance is deferred, the opportunity to apply preventive, life extending pavement treatments is forfeited and the ultimate cost of rehabilitation multiplies (i.e. slurry seal costs to overlay costs). By using the City’s pavement maintenance applications and their associated unit costs, when a budgetary model is exercised within the PMP software the amount of deferred maintenance is calculated. Based upon the available budget applied to the model, deferred maintenance will increase or decrease.

As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiplies.

In the case of Westminster, the City’s actual budget will increase the amount of deferred maintenance on both the Arterial and Local networks by FY 2033. The moderate amount of overlay work on the Arterial and Local program continues to generate high amounts of deferred maintenance.

VIII. CENTERLINE MILEAGE

Rank	PCI	Mileage	SF
Art / Coll	80.9	63.7	14,516,980
Locals	80.0	127.0	23,720,120
Citywide	80.3	190.7	38,237,100

IX. PERCENTAGE OF NETWORK IN EACH OF FIVE CONDITION CATEGORIES BASED ON CENTERLINE MILES

Condition	PCI Range	Network	Percent Area of Total Pavement	Area of Pavement (SF)	Percent Centerline Mi. of Network	Centerline Mileage of Network
Very Good	(86-100)	MPAH	15.6%	5,964,194	14.1%	26.9
		Local	21.5%	8,217,348	23.1%	44.1
Good	(75-85)	MPAH	8.5%	3,255,638	7.0%	13.3
		Local	21.1%	8,084,001	22.9%	43.6
Fair	(60-74)	MPAH	8.7%	3,333,191	7.9%	15.1
		Local	15.5%	5,922,669	16.9%	32.2
Poor	(41-59)	MPAH	5.1%	1,963,957	4.4%	8.4
		Local	3.7%	1,414,223	3.7%	7.0
Very Poor	(0-40)	MPAH	0.0%	0	0.0%	0.0
		Local	0.2%	81,879	0.1%	0.1
				38,237,100		190.7

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

X. REDUCTION IN M2 LOCAL MATCH

A local agency match reduction of 10% of the eligible cost for projects submitted for consideration of funding through the M2 Comprehensive Transportation Funding Programs (CTFP) call for projects is available if the local agency either:

- a. Shows measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one Pavement Condition Index (PCI) point with no reduction in the overall weighted (by area) average PCI in the Master Plan of Arterial Highways (MPAH) or local categories:

or

- b. Have road pavement conditions during the previous reporting period, within the highest 20% of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in “good condition”.

Road conditions found through our 2026 PMP management study shows that the City is eligible for Local Match Reduction based on the current network weighted PCI of 80.3 (system currently has a weighted PCI over 75).

Additionally, the unit costs utilized by the City for maintenance / rehabilitation applications include 25% contingencies that address other key infrastructure improvements created by pavement slurry seal, overlay and reconstruction projects. These include ADA improvements, right-of-way curb/gutter/sidewalk improvements and utility coordination.

**XI. APPENDIX A – SEVEN YEAR ROAD MAINTENANCE AND REHABILITATION
PLAN BASED ON CURRENT OR EXPECTED FUNDING LEVEL**

Draft

City of Westminster, CA
Forecast Maintenance Rehabilitation (FMR) Report - FY 2026-2033

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Maint./Rehab Recommendations	Total \$
Arterials / Collectors (MPAH)																			
2026-27	82	10620	Bolsa Ave	Brookhurst St	Bushard St	5	AAC	A	3	2,600	48	115,230	53	25	71	4	3/30/2026	2.5" Grind-ARHM Overlay	Funded
2026-27	82	10622	Bolsa Ave	Bushard St	Brookhurst St	5	AAC	A	3	2,600	48	117,610	54	29	70	1	3/30/2026	2.5" Grind-ARHM Overlay	Funded
2026-27	217	10740	Edinger Ave	Magnolia St	Bushard St	6	AC	A	2	2,600	34	103,856	56	47	40	13	3/30/2026	2.5" Grind-ARHM Overlay	\$829,809
2026-27	217	10742	Edinger Ave	Magnolia St	Bushard St	6	AC	A	2	2,600	34	104,395	65	57	28	15	2/20/2026	2.5" Grind-ARHM Overlay	\$834,116
2026-27	269	3990	Goldenwest St	Natal Dr	Garden Grove Blvd	3	AC	A	3	629	40	24,418	49	41	59	0	4/1/2026	2.5" Grind-ARHM Overlay	\$195,100
2026-27	269	3992	Goldenwest St	Garden Grove Blvd	Natal Dr	3	AAC	A	3	629	40	23,780	44	41	59	0	4/1/2026	2.5" Grind-ARHM Overlay	\$190,002
2026-27	269	4000	Goldenwest St	Sowell Ave	Hazard Ave	3	AC	A	3	1,150	40	45,023	61	28	56	16	3/25/2026	2.5" Grind-ARHM Overlay	\$359,734
2026-27	269	4002	Goldenwest St	Hazard Ave	Sowell Ave	3	AC	A	3	1,150	40	49,974	54	28	63	9	4/1/2026	2.5" Grind-ARHM Overlay	\$399,292
2026-27	269	4010	Goldenwest St	Hazard Ave	Main St	3	AC	A	3	1,307	40	50,714	53	32	62	6	3/25/2026	2.5" Grind-ARHM Overlay	\$405,205
2026-27	269	4012	Goldenwest St	Main St	Hazard Ave	3	AAC	A	3	1,284	40	50,624	49	50	45	5	4/1/2026	2.5" Grind-ARHM Overlay	\$404,486
2026-27	269	4020	Goldenwest St	Westminster Blvd	Trask Ave	3	AC	A	3	2,600	40	99,429	50	44	36	20	3/25/2026	2.5" Grind-ARHM Overlay	\$794,438
2026-27	269	4022	Goldenwest St	Trask Ave	Westminster Blvd	3	AAC	A	3	2,600	40	109,473	52	31	64	5	4/1/2026	2.5" Grind-ARHM Overlay	\$874,689
2026-27	269	4030	Goldenwest St	Main St	Westminster Blvd	3	AC	A	3	1,322	40	53,891	55	39	58	3	3/25/2026	2.5" Grind-ARHM Overlay	\$430,589
2026-27	269	4032	Goldenwest St	Westminster Blvd	Main St	3	AAC	A	3	1,322	40	49,205	48	38	61	1	4/1/2026	2.5" Grind-ARHM Overlay	\$393,148
2026-27	269	4052	Goldenwest St	McFadden Ave	Georgetown Ave	3	AC	A	6	1,839	80	146,179	54	44	48	8	3/31/2026	2.5" Grind-ARHM Overlay	\$1,167,970
2026-27	269	4060	Goldenwest St	Trask Ave	Natal Dr	3	AC	A	3	1,990	40	73,885	49	46	51	3	4/1/2026	2.5" Grind-ARHM Overlay	\$590,341
2026-27	269	4062	Goldenwest St	Natal Dr	Trask Ave	3	AAC	A	3	1,990	40	81,335	49	46	54	0	4/1/2026	2.5" Grind-ARHM Overlay	\$649,867
																			\$8,518,786
2027-28	82	10640	Bolsa Ave	Magnolia St	428' e/o Purdy St (CL)	5	AC	A	3	1,350	40	54,724	79	33	61	6	2/26/2026	Type II Slurry Seal	\$119,846
2027-28	82	10642	Bolsa Ave	250' E/O Purdy St	Magnolia St	5	AC	A	2	1,500	40	58,630	67	74	19	7	2/26/2026	Type II Slurry Seal	\$128,400
2027-28	82	10650	Bolsa Ave	Goldenwest St	Edwards St (CL)	2	AAC	A	3	2,600	48	113,616	58	60	40	0	12/9/2025	2.5" Grind-ARHM Overlay	\$944,149
2027-28	82	11180	Bolsa Ave	Hoover St	806' e/o Temple St (CL)	3	AC	A	2	1,293	35	65,107	47	54	40	6	3/31/2026	2.5" Grind-ARHM Overlay	\$541,039
2027-28	82	11182	Bolsa Ave	Hoover St	806' e/o Temple St (CL)	3	AC	A	2	1,284	45	60,599	70	37	63	0	3/31/2026	Type II Slurry Seal	\$88,912
2027-28	290	10780	Hazard Ave	Goldenwest St	Hoover St	3	AC	B	4	2,600	60	156,867	61	39	52	9	3/25/2026	2.5" Grind-ARHM Overlay	\$1,303,565
																			\$3,125,910
2028-29	98	11430	Brookhurst St	Hazard St	Bolsa Ave	5	AAC	A	3	2,600	50	120,896	59	42	47	11	3/30/26	2.5" Grind-ARHM Overlay	\$1,044,541
2028-29	107	10690	Bushard St	Hazard St	Bolsa Ave	5	AC	B	4	2,600	62	150,818	58	41	51	8	3/30/26	2.5" Grind-ARHM Overlay	\$1,303,068
2028-29	219	11370	Edwards St	Walt St	405 Fwy (E/S)	2	AAC	B	4	1,220	60	70,675	74	34	65	1	4/1/2026	Type II Slurry Seal	\$161,139
2028-29	219	11380	Edwards St	Sunside St	Walt St	2	AAC	B	4	278	48	13,870	80	35	63	2	4/1/2026	Type II Slurry Seal	\$31,624
2028-29	219	11390	Edwards St	Westminster Ave	Sunside St	2	AAC	B	4	450	62	28,268	63	38	59	3	4/1/2026	AC Grind-Overlay	\$214,837
2028-29	668	11440	Westminster Blvd	Edwards St	Goldenwest St	2	AAC	A	2	2,650	40	94,892	89	58	35	7	2/25/2026	Type II Slurry Seal	\$216,354
2028-29	668	11442	Westminster Blvd	Goldenwest St	Edwards St	2	AAC	A	3	2,650	42	107,207	83	79	21	0	2/25/2026	Type II Slurry Seal	\$244,432
																			\$3,215,994
2029-30	107	10722	Bushard St	City Limit	100' N/O Stenson St	6	AC	A	2	785	30	22,514	66	46	49	5	2/20/26	2.5" Grind-ARHM Overlay	\$202,401
2029-30	252	10760	Garden Grove Blvd	Melanie St	Bolsa Chica Rd	2	AC	B	2	3,650	43	231,462	77	49	47	4	2/9/2026	Type II Slurry Seal	\$548,565
2029-30	252	10770	Garden Grove Blvd	Edwards St	Goldenwest St	2	AC	B	2	2,694	50	169,403	80	46	54	0	2/9/2026	Type II Slurry Seal	\$401,485
2029-30	252	11220	Garden Grove Blvd	Springdale St	Edwards St	2	AC	A	2	1,320	50	70,112	86	36	64	0	2/9/2026	Type II Slurry Seal	\$166,165
2029-30	252	11230	Garden Grove Blvd	Melanie St	Springdale St	2	AC	A	2	1,895	50	101,710	75	45	55	0	2/9/2026	Type II Slurry Seal	\$241,053
2029-30	405	10901	McFadden Ave	Railroad Crossing	Goldenwest Av	3	AC	A	2	2,600	20	153,135	56	58	34	8	3/31/26	2.5" Grind-ARHM Overlay	\$1,376,684
																			\$2,936,353
2030-31	380	10862	Magnolia Ave	McFadden Av	Edinger Av	5	AC	A	3	2,600	48	109,065	66	34	51	15	2/20/26	2.5" Grind-ARHM Overlay	\$1,019,758
2030-31	380	10870	Magnolia Ave	Bishop Pl	Bolsa Av	5	AC	A	2	1,250	48	54,397	79	23	66	11	2/26/26	Type II Slurry Seal	\$134,361
2030-31	380	10872	Magnolia Ave	Bolsa Av	McFadden Av	5	AC	A	3	2,600	48	101,936	69	36	59	5	2/26/26	Type II Slurry Seal	\$251,782
2030-31	380	10880	Magnolia Ave	Bolsa Av	Hazard Av	5	AC	A	3	2,600	48	101,921	60	60	32	8	3/24/2026	2.5" Grind-ARHM Overlay	\$952,961
2030-31	380	10882	Magnolia Ave	Hazard Av	Bolsa Av	5	AC	A	3	2,600	48	103,968	58	40	46	14	3/31/26	2.5" Grind-ARHM Overlay	\$972,101
																			\$3,330,962
2031-32	82	1330	Bolsa Ave	Hoover St	405 Bridge	3	AC	A	2	1,744	43	80,364	55	42	46	12	3/31/2026	2.5" Grind-ARHM Overlay	\$781,138
2031-32	82	1332	Bolsa Ave	405 Bridge	Hoover St	3	AC	A	2	1,725	45	79,313	54	46	50	4	3/31/2026	2.5" Grind-ARHM Overlay	\$770,922
2031-32	82	1350	Bolsa Ave	445' w/o Harper St (CL)	Newland St	5	AC	A	2	730	30	38,708	89	32	68	0	2/26/2026	Type II Slurry Seal	\$99,480
2031-32	82	14040	Bolsa Ave	365' W/O Beach Blvd (CL)	806' E/O Temple St (CL)	3	AC	A	0	991	35	49,157	92	0	100	0	1/21/2026	Type II Slurry Seal	\$126,333
2031-32	82	14050	Bolsa Ave	806' E/O Temple St (CL)	365' W/O Beach Blvd (CL)	3	AC	A	0	991	42	31,249	92	0	100	0	1/21/2026	Type II Slurry Seal	\$80,310
2031-32	668	11150	Westminster Blvd	405 Fwy Bridge	Edwards St	2	AC	A	2	1,616	40	65,495	60	64	26	10	3/25/2026	2.5" Grind-ARHM Overlay	\$636,611
2031-32	668	11152	Westminster Blvd	Edwards St	405 Fwy Bridge	2	AC	A	2	1,655	42	63,905	70	42	56	2	3/25/2026	Type II Slurry Seal	\$164,236
2031-32	668	11165	Westminster Blvd	Milan St	Springdale St	1	AC	A	2	2,640	40	102,410	79	69	31	0	11/24/2025	Type II Slurry Seal	\$263,194
2031-32	668	11168	Westminster Blvd	Springdale St	Milan St	1	AAC	A	2	2,640	42	92,333	73	62	37	1	12/1/2025	Type II Slurry Seal	\$237,296
																			\$3,159,520
2032-33	290	10790	Hazard Ave	Monroe St	Newland St	4	AC	B	4	1,351	62	73,080	73	0	100	0	2/25/2026	Type II Slurry Seal	\$195,124
2032-33	290	10800	Hazard Ave	Colonial Dr	Magnolia St	4	AC	B	4	1,150	62	66,822	63	37	49	14	3/30/2026	2.5" Grind-ARHM Overlay	\$675,570
2032-33	290	10810	Hazard Ave	Moran St	670' E/O Bushard St	4	AC	B	4	1,960	50	117,443	84	0	80	20	2/25/2026	Type II Slurry Seal	\$313,573
2032-33	290	4350	Hazard Ave	Beach Blvd	Cedarwood Ave	4	AC	B	4	1,306	54	74,695	77	8	92	0	2/26/2026	Type II Slurry Seal	\$199,436
2032-33	290	4380	Hazard Ave	Cedarwood Ave	Hoover St	4	AC	B	4	1,304	50	66,153	81	0	100	0	2/26/2026	Type II Slurry Seal	\$176,629
2032-33	290	90070	Hazard Ave	Newland Ave	Colonial Dr	4	AC	B	2	1,450	62	84,201	66	29	60	11	3/30/2026	AC Grind-Overlay	\$749,389
2032-33	290	90071	Hazard Ave	Beach Blvd	Monroe St	4	AC	B	2	1,249	62	79,744	67	22	24	54	2/26/2026	Type II Slurry Seal	\$212,916
2032-33	290	90072	Hazard Ave	Magnolia Ave	Moran St	4	AC	B	2	1,300	50	79,808	63	46	41	13	2/25/2026	2.5" Grind-ARHM Overlay	\$806,859

City of Westminster, CA
Forecast Maintenance Rehabilitation (FMR) Report - FY 2026-2033

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Maint./Rehab Recommendations	Total \$
			Locals																\$3,329,495
2026-27	3	50	12th St	Pacific Ave	Beach Blvd	4	AC	E	2	606	33	18,835	48	3	29	68	1/14/2026	AC Grind-Overlay	\$81,556
2026-27	67	1070	Berkeley Ave	Winthrop St	End	1	AC	E	2	557	32	20,078	51	84	16	0	11/19/2025	AC Grind-Overlay	\$86,938
2026-27	73	1170	Bexley St	Shrewsbury Ave	Somerset St	1	AC	E	2	221	37	10,250	37	78	21	1	11/25/2025	AC Grind-Overlay	\$44,383
2026-27	106	1780	Bush St	Westminster Ave	End	1	AAC	E	2	656	30	22,745	47	13	77	10	12/1/2025	AC Grind-Overlay	\$98,486
2026-27	113	1890	Cambridge Ave	Winthrop St	End	1	AC	E	2	562	32	20,499	44	89	11	0	11/19/2025	AC Grind-Overlay	\$88,761
2026-27	113	1900	Cambridge Ave	Univeristy St	Winthrop St	1	AC	E	2	1,272	32	45,733	51	87	13	0	11/19/2025	AC Grind-Overlay	\$198,024
2026-27	145	2380	Choctaw Dr	Navajo Rd	Iroquois Rd	2	AC	E	2	1,270	33	42,316	48	45	55	0	12/16/2025	AC Grind-Overlay	\$183,228
2026-27	158	2540	College St	Westminster Ave	Somerset St	1	AC	E	2	270	47	11,538	43	69	31	0	11/25/2025	AC Grind-Overlay	\$49,960
2026-27	158	2550	College St	Westminster Ave	Harvard Ave	1	AC	E	2	586	33	18,302	50	82	18	0	11/19/2025	AC Grind-Overlay	\$79,248
2026-27	171	2710	Cornwall Ave	Wakefield St	Bromley St	5	AAC	E	2	1,050	33	33,689	51	42	58	0	1/27/2026	AC Grind-Overlay	\$145,873
2026-27	206	3100	Drey Rd	Dana Cir	Jody Cir	1	AC	E	2	550	33	19,107	54	81	19	0	12/10/2025	AC Grind-Overlay	\$82,733
2026-27	213	3190	Ed Bane Cir	Lunar St	End	1	AC	E	2	200	32	7,873	71	27	58	15	1/6/2026	Type II Slurry Seal	\$16,612
2026-27	228	3500	Enfield Cir	Horsham Ave	End	1	AC	E	2	694	37	28,190	51	86	14	0	11/25/2025	AC Grind-Overlay	\$122,063
2026-27	250	3740	Galaxy Dr	Heil Ave	Universe Ave	1	AC	E	2	1,200	33	35,697	62	54	46	0	1/6/2026	AC Grind-Overlay	\$154,568
2026-27	258	3880	Georgetown Ave	Goldenwest St	Lafayette St	3	AC	E	2	349	36	13,092	49	56	25	19	12/9/2025	AC Grind-Overlay	\$56,688
2026-27	294	11500	Heil Ave	Venus Dr	Magnolia St	1	AC	E	2	700	32	17,990	53	63	37	0	1/6/2026	AC Grind-Overlay	\$77,897
2026-27	312	4820	Ipswich St	Horsham Ave	Tattershall Ave	1	AC	E	2	470	44	19,012	46	76	24	0	11/25/2025	AC Grind-Overlay	\$82,322
2026-27	325	5060	Jim St	Wells Rd	End	1	AC	E	2	250	33	7,401	38	78	22	0	12/10/2025	AC Grind-Overlay	\$32,046
2026-27	326	5070	Jody Cir	Drey Rd	End	1	AC	E	2	750	33	27,989	49	82	18	0	12/10/2025	AC Grind-Overlay	\$121,192
2026-27	338	5180	Kent St	Cornwall Av	End	5	AAC	E	2	350	34	11,796	51	47	53	0	1/27/2026	AC Grind-Overlay	\$51,077
2026-27	374	5700	Loyola Ave	Winthrop St	Bolsa Chica Rd	1	AC	E	2	613	32	19,830	45	63	37	0	11/19/2025	AC Grind-Overlay	\$85,864
2026-27	375	5720	Lunar St	Universe Av	End	1	AC	E	2	500	33	17,893	58	53	37	10	1/6/2026	AC Grind-Overlay	\$77,477
2026-27	450	6770	Newcastle Ave	Kent St	Brookhurst St	5	AAC	E	2	879	37	33,849	57	10	90	0	1/27/2026	AC Grind-Overlay	\$146,566
2026-27	477	7260	Pacific Ave	10th St	End	4	AC	E	2	932	40	38,688	48	56	24	20	1/14/2026	AC Grind-Overlay	\$167,519
2026-27	9800	9900	Sabre Ave	Wakefield St	W City Limit	1	AC	E	2	106	32	3,392	61	41	59	0	2/25/2026	AC Grind-Overlay	\$14,687
2026-27	634	9450	University St	Westminster Av	Shrewsbury Av	1	AC	E	2	86	44	5,412	43	69	31	0	11/25/2025	AC Grind-Overlay	\$23,434
2026-27	634	9460	University St	Purdue Av	Vallecito Av	1	AAC	E	2	1,105	33	33,505	44	81	19	0	11/19/2025	AC Grind-Overlay	\$145,077
2026-27	634	9470	University St	Westminster Av	Purdue Av	1	AC	E	2	1,325	33	44,932	49	83	17	0	11/19/2025	AC Grind-Overlay	\$194,556
2026-27	636	9510	Vallecito Av	Winthrop St	End	1	AC	E	2	610	33	20,186	47	85	15	0	11/19/2025	AC Grind-Overlay	\$87,405
2026-27	639	9560	Van De Velde Wy	Heil Av	End	1	AC	E	2	150	32	7,984	59	59	40	1	1/6/2026	AC Grind-Overlay	\$34,571
2026-27	642	9590	Venus Dr	Universe Av	Heil Av	1	AC	E	2	1,516	33	47,968	62	60	34	6	1/6/2026	AC Grind-Overlay	\$207,701
2026-27	649	9685	Wakefield St	Sabre Av	Cornwall Av	5	AC	E	2	85	32	5,570	59	0	100	0	6/12/2026	AC Grind-Overlay	\$24,118
2026-27	688	10380	Winthrop St	Vallecito Av	Duncannon Av	1	AC	E	2	226	32	7,076	36	85	15	0	4/28/2026	AC Grind-Overlay	\$30,639
2026-27	688	10390	Winthrop St	Harvard Av	Cornell Av	1	AC	E	2	804	32	23,879	61	79	17	4	11/19/2025	AC Grind-Overlay	\$103,396
2026-27	688	10400	Winthrop St	Cornell Av	Vallecito Av	1	AC	E	2	982	32	34,883	26	85	15	0	11/19/2025	AC Grind-Overlay	\$151,043
2026-27	690	10420	Drey Rd	Woodruff St	Wells Rd	1	AC	E	2	1,000	33	29,670	39	76	24	0	12/10/2025	AC Grind-Overlay	\$128,471
																			\$3,476,178
2027-28	52	890	Bannock Rd	Seneca Dr	Klamath Dr	2	AC	E	2	843	33	29,985	75	36	64	0	12/16/2025	Type II Slurry Seal	\$65,667
2027-28	52	900	Bannock Rd	Sioux Rd	Klamath Dr	2	AC	E	2	935	33	32,194	73	49	23	28	12/16/2025	Type II Slurry Seal	\$70,505
2027-28	52	910	Bannock Rd	Seneca Dr	Edwards St	2	AC	E	2	980	34	34,072	65	46	48	6	12/16/2025	AC Grind-Overlay	\$153,324
2027-28	127	2090	Cayuga Dr	Navajo Rd	Kiowa Rd	2	AC	E	2	843	33	28,406	68	62	38	0	12/16/2025	Type II Slurry Seal	\$62,209
2027-28	141	2330	Cheyenne Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	832	34	29,058	66	71	29	0	12/16/2025	AC Grind-Overlay	\$130,761
2027-28	142	2340	Chickasaw Dr	Navajo Rd	Iroquois Rd	2	AC	E	2	1,127	33	37,045	63	58	42	0	12/16/2025	AC Grind-Overlay	\$166,703
2027-28	143	2360	Chinook Ave	Willow Ln	Springdale St	2	AAC	E	2	1,591	33	51,504	78	58	37	5	12/2/2025	Type II Slurry Seal	\$112,794
2027-28	161	2590	Comanche Dr	Sioux Rd	Modoc Dr	2	AC	E	2	762	33	24,999	78	36	64	0	12/16/2025	Type II Slurry Seal	\$54,748
2027-28	191	2950	Denise Dr	Homer St	End	2	AC	E	2	493	33	16,355	67	75	25	0	12/17/2025	Type II Slurry Seal	\$35,817
2027-28	212	3180	Ebony Wy	Camphor Ave	Mahogany Ave	2	AC	E	2	252	33	10,600	70	7	93	0	12/8/2025	Type II Slurry Seal	\$23,214
2027-28	234	3560	Evans Cir	Wheeler Ave	End	2	AC	E	2	135	33	6,586	80	0	41	59	12/17/2025	Type II Slurry Seal	\$14,423
2027-28	315	4860	Iroquois Rd	Sprindale St	Barney St	2	AC	E	2	985	33	30,911	66	49	50	1	12/15/2025	AC Grind-Overlay	\$139,100
2027-28	315	4870	Iroquois Rd	Seneca Dr	Edwards St	2	AC	E	2	1,051	34	35,354	72	40	60	0	12/16/2025	Type II Slurry Seal	\$77,425
2027-28	363	5550	Lee Dr	Meinhardt Rd	Dorothy Dr	2	AC	E	2	1,294	33	43,815	74	59	23	18	12/15/2025	Type II Slurry Seal	\$95,955
2027-28	386	5910	Maple St	Willow Ln	Old Edwards St	2	AC	C	2	955	30	36,431	54	20	41	39	12/9/2025	AC Grind-Overlay	\$163,940
2027-28	391	5970	Marilyn Cir	Meinhardt Rd	End	2	AC	E	2	468	33	17,223	78	0	100	0	12/15/2025	Type II Slurry Seal	\$37,718
2027-28	424	6330	Milton Ave	Hefley St	End	2	AAC	E	2	1,160	35	44,482	72	10	52	38	12/15/2025	Type II Slurry Seal	\$97,416
2027-28	424	6340	Milton Ave	Willow Ln	Hefley St	2	AC	C	2	1,221	33	38,068	75	18	44	38	12/15/2025	Type II Slurry Seal	\$83,369
2027-28	440	6570	Nancy Lee Dr	Westminster Av	Homer St	2	AC	E	2	1,187	33	42,656	68	73	27	0	12/17/2025	Type II Slurry Seal	\$93,417
2027-28	440	6571	Nancy Lee Dr	Homer St	End	2	AC	E	2	135	33	3,905	86	0	100	0	12/17/2025	Type II Slurry Seal	\$8,552
2027-28	490	7440	Peak Cir	Sequola Dr	End	2	AC	E	2	160	33	7,730	66	0	65	35	1/2/2026	AC Grind-Overlay	\$34,785
2027-28	542	8140	Roxanne Dr	Homer St	Ginger Ln	2	AC	E	2	743	34	25,472	76	56	44	0	12/17/2025	Type II Slurry Seal	\$55,784
2027-28	554	8250	Santee Ave	Goldenwest St	End	2	AC	E	2	1,150	34	39,782	68	47	53	0	1/13/2026	Type II Slurry Seal	\$87,123
2027-28	563	8350	Shawnee Rd	Seneca Dr	Klamath Dr	2	AC	E	2	651	33	23,186	65	54	46	0	12/16/2025	AC Grind-Overlay	\$104,337
2027-28	563	8360	Shawnee Rd	Iroquois Rrd	Klamath Dr	2	AC	E	2	934	34	32,926	76	50	50	0	12/16/2025	Type II Slurry Seal	\$72,108
2027-28	563	8370	Shawnee Rd	Seneca Dr	Edwards St	2	AC	E	2	1,003	33	33,376	68	43	44	13	12/16/2025	Type II Slurry Seal	\$73,093

City of Westminster, CA
Forecast Maintenance Rehabilitation (FMR) Report - FY 2026-2033

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Maint./Rehab Recommendations	Total \$
2027-28	579	8600	Sowell Ave	Goldenwest St	Santee Av	2	AC	E	2	1,213	33	40,734	75	38	42	20	1/13/2026	Type II Slurry Seal	\$89,207
2027-28	1055	90061	Springdale Pl	Meinhardt Rd	End	2	AC	E	2	175	33	5,671	48	54	33	13	12/15/2025	AC Grind-Overlay	\$25,520
2027-28	615	9170	Tillamook Ave	Sutter Dr	Edwards St	2	AC	E	2	1,141	33	37,529	86	0	97	3	1/2/2026	Type II Slurry Seal	\$82,189
2027-28	1057	90064	West Dr	Bolsa Av	Mall	2	AC	E	4	230	58	9,279	80	0	52	48	12/9/2025	Type II Slurry Seal	\$20,321
2027-28	671	10100	Westpark Pl	Siskiyou St	End	2	AC	C	2	755	37	33,181	57	68	28	4	12/17/2025	AC Grind-Overlay	\$149,315
2027-28	671	10110	Westpark Pl	Goldenwest St	Siskiyou St	2	AC	C	2	1,119	38	44,025	68	52	42	6	12/17/2025	Type II Slurry Seal	\$96,415
2027-28	706	10300	Willow Cir	Willow Ln	CDS	2	AC	E	2	214	20	6,104	69	54	46	0	12/8/2025	Type II Slurry Seal	\$13,368
2027-28	683	10270	Willow Ln	Chinook Av	Maple St	2	AC	E	2	386	33	12,181	73	30	70	0	12/8/2025	Type II Slurry Seal	\$26,676
2027-28	683	10280	Willow Ln	Ebony Wy	Chinook Av	2	AC	E	2	1,206	33	37,561	75	38	62	0	12/2/2025	Type II Slurry Seal	\$82,259
																			\$2,699,554
2028-29	9	210	18th St	Pacific Ave	Beach Blvd	4	AAC	E	2	609	33	20,179	71	24	76	0	1/6/2026	Type II Slurry Seal	\$46,008
2028-29	9	220	18th St	Beach Blvd	Monroe St	4	AC	E	2	1,209	33	38,436	64	34	25	41	1/7/2026	AC Grind-Overlay	\$179,880
2028-29	10	230	19th St	Richardson Wy	Pacific Ave	4	AAC	E	2	467	33	16,026	77	17	81	2	1/6/2026	Type II Slurry Seal	\$36,539
2028-29	10	240	19th St	Pacific Ave	Beach Blvd	4	AAC	E	2	653	31	21,507	74	9	91	0	1/6/2026	Type II Slurry Seal	\$49,036
2028-29	10	250	19th St	Beach Blvd	Monroe St	4	AC	E	2	1,201	33	39,425	84	12	65	23	1/7/2026	Type II Slurry Seal	\$89,889
2028-29	11	260	20th Pl	Harper St	End	4	AAC	E	2	300	33	10,640	69	24	45	31	1/7/2026	Type II Slurry Seal	\$24,259
2028-29	12	275	20th St	Richardson Wy	Pacific Ave	4	AC	E	2	467	33	15,129	86	57	43	0	1/6/2026	Type II Slurry Seal	\$34,494
2028-29	12	280	20th St	Beach Blvd	End	4	AC	E	2	1,721	33	53,818	85	13	85	2	1/7/2026	Type II Slurry Seal	\$122,705
2028-29	15	370	23rd St	Pacific Ave	Beach Blvd	4	AAC	E	2	637	31	22,464	73	25	75	0	1/6/2026	Type II Slurry Seal	\$51,218
2028-29	15	390	23rd St	Wilson St	Newland St	4	AC	E	2	650	33	19,144	67	20	80	0	1/7/2026	Type II Slurry Seal	\$43,648
2028-29	15	400	23rd St	Beach Blvd	Monroe St	4	AC	E	2	1,228	33	43,293	72	47	26	27	1/7/2026	Type II Slurry Seal	\$98,708
2028-29	15	405	23rd St	Monroe St	Wilson St	4	AC	E	2	680	33	22,165	65	29	71	0	1/7/2026	AC Grind-Overlay	\$103,732
2028-29	999	6450	All American Way	Westminster Ave	13th St	4	AC	E	2	1,249	36	51,565	74	8	53	39	1/19/2026	Type II Slurry Seal	\$117,568
2028-29	129	2120	Cedarwood Ave	13th St	Hazard Ave	4	AC	E	2	1,234	33	40,490	70	41	47	12	1/14/2026	Type II Slurry Seal	\$92,317
2028-29	129	2130	Cedarwood Ave	13th St	Westminster Ave	4	AC	E	2	1,298	33	43,213	74	40	49	11	1/14/2026	Type II Slurry Seal	\$98,526
2028-29	134	2180	Charleville Dr	23rd St	21st St	4	AAC	E	2	635	31	20,353	74	9	91	0	1/6/2026	Type II Slurry Seal	\$46,405
2028-29	134	2190	Charleville Dr	21st St	19th St	4	AAC	E	2	634	31	20,398	69	14	86	0	1/6/2026	Type II Slurry Seal	\$46,507
2028-29	167	2650	Conner Cir	Wilson St	End	4	AC	E	2	350	27	14,385	75	19	81	0	1/6/2026	Type II Slurry Seal	\$32,798
2028-29	317	4900	Jackson St	Westminster Ave	15th St	4	AC	E	2	750	36	27,174	82	0	96	4	1/19/2026	Type II Slurry Seal	\$61,957
2028-29	317	4915	Jackson St	23rd St	21st St	4	AC	E	2	600	36	23,683	80	23	75	2	1/6/2026	Type II Slurry Seal	\$53,997
2028-29	317	4920	Jackson St	21st St	Westminster Ave	4	AC	E	2	1,300	36	45,212	78	49	49	2	1/6/2026	Type II Slurry Seal	\$103,083
2028-29	377	5740	Macon Cir	Monticello Cir	End	4	AC	E	2	200	33	8,273	59	0	83	17	1/19/2026	AC Grind-Overlay	\$38,718
2028-29	384	5850	Malibu Cir	Middleton Ln	End	4	AC	E	2	200	36	8,355	72	28	30	42	1/19/2026	Type II Slurry Seal	\$19,049
2028-29	392	5980	Mariner Ln	Melrose Cir	Middleton Ln	4	AC	E	2	350	37	12,116	58	61	34	5	1/19/2026	AC Grind-Overlay	\$56,703
2028-29	417	6230	Miami Cir	Monroe St	End	4	AC	E	2	550	33	19,675	59	51	49	0	1/19/2026	AC Grind-Overlay	\$92,079
2028-29	426	6360	Mirage Ave	Glitter St	End	4	AC	E	2	820	36	26,906	79	24	73	3	1/21/2026	Type II Slurry Seal	\$61,346
2028-29	432	6430	Monroe St	23rd St	21st St	4	AC	E	2	650	33	20,686	84	0	89	11	1/7/2026	Type II Slurry Seal	\$47,164
2028-29	432	6460	Monroe St	Westminster Av	21st St	4	AC	E	2	1,300	34	47,182	79	36	62	2	1/7/2026	Type II Slurry Seal	\$107,575
2028-29	435	6500	Monticello Cir	Monroe Ln	End	4	AC	E	2	650	33	23,291	61	8	84	8	1/19/2026	AC Grind-Overlay	\$109,002
2028-29	477	7240	Pacific Ave	Westminster Av	19th St	4	AAC	E	2	635	38	21,831	69	14	86	0	1/6/2026	Type II Slurry Seal	\$49,775
2028-29	477	7250	Pacific Ave	19th St	23rd St	4	AAC	E	2	1,345	34	44,185	68	14	82	4	1/6/2026	Type II Slurry Seal	\$100,742
2028-29	477	7270	Pacific Ave	13th St	Westminster Av	4	AC	E	2	1,313	40	50,433	65	58	38	4	1/14/2026	AC Grind-Overlay	\$236,026
2028-29	525	7880	Reading Ave	Goebel Ln	End	4	AAC	E	2	1,050	33	37,958	84	14	86	0	1/20/2026	Type II Slurry Seal	\$86,544
2028-29	601	8970	Suzi Ln	Hoover St	End	4	AC	E	2	435	43	20,359	63	58	23	19	1/14/2026	AC Grind-Overlay	\$95,280
2028-29	660	9800	Webber Pl	Baylor Dr	Westminster Av	4	AAC	C	2	398	33	15,486	72	6	54	40	1/14/2026	Type II Slurry Seal	\$35,308
																			\$2,668,587
2029-30	12	270	20th St	Cherry St	Olive St	3	AAC	E	2	752	32	25,244	70	64	31	5	1/6/2026	Type II Slurry Seal	\$59,828
2029-30	28	570	Amherst Cir	Colgate Ave	End	3	AC	E	2	150	32	6,820	73	41	48	11	2/20/2026	Type II Slurry Seal	\$16,163
2029-30	120	1990	Carlton Ave	Maryknoll St	Vermont St	3	AC	E	2	875	38	32,937	76	42	54	4	12/10/2025	Type II Slurry Seal	\$78,061
2029-30	129	14060	Cedarwood Ave	Sugar Dr	End	3	AC	E	0	1,309	33	41,113	84	27	55	18	1/20/2026	Type II Slurry Seal	\$97,438
2029-30	138	2230	Cherry St	Natal Dr	Bestel Ave	3	AC	E	2	1,117	34	37,386	77	11	89	0	1/2/2026	Type II Slurry Seal	\$88,605
2029-30	148	2410	Citadel Cir	Clemson St	End	3	AC	E	2	137	32	8,190	61	64	36	0	2/20/2026	AC Grind-Overlay	\$39,885
2029-30	157	2520	Colgate Ave	Clemson St	Xavier Cir	3	AC	E	2	787	33	28,060	73	61	39	0	1/20/2026	Type II Slurry Seal	\$66,502
2029-30	157	2530	Colgate Ave	Temple St	Clemson St	3	AAC	E	2	930	36	33,752	75	41	58	1	1/20/2026	Type II Slurry Seal	\$79,992
2029-30	157	2535	Colgate Ave	Temple St	W End	3	AC	E	2	333	36	12,695	84	67	33	0	1/20/2026	Type II Slurry Seal	\$30,087
2029-30	188	2900	De Paul St	Emerson Ave	Sienna Ave	3	AC	E	2	238	33	10,858	65	65	35	0	12/10/2025	AC Grind-Overlay	\$52,878
2029-30	308	4730	Illinois St	Texas St	End	3	AC	E	2	150	30	8,609	45	0	31	69	1/6/2026	AC Grind-Overlay	\$41,926
2029-30	308	4740	Illinois St	Trask Ave	21st St	3	AC	E	2	1,235	34	40,263	76	23	48	29	12/26/2025	Type II Slurry Seal	\$95,423
2029-30	311	4810	Iowa St	Trask Ave	21st St	3	AC	E	2	1,248	36	41,149	82	9	86	5	12/29/2025	Type II Slurry Seal	\$97,523
2029-30	311	4811	Iowa St	21st St	End	3	AC	E	2	400	36	15,819	82	19	74	7	12/29/2025	Type II Slurry Seal	\$37,491
2029-30	317	4925	Jackson St	McFadden Ave	Bishop Ave	3	AC	E	2	1,305	18	47,270	85	68	26	6	1/21/2026	Type II Slurry Seal	\$112,030
2029-30	386	5900	Maple St	Olive St	End	3	AC	E	2	347	33	12,433	85	25	75	0	1/13/2026	Type II Slurry Seal	\$29,466
2029-30	443	6620	Natal Dr	Cedar St	Goldenwest St	3	AAC	C	2	1,230	36	44,092	79	41	48	11	12/26/2025	Type II Slurry Seal	\$104,498
2029-30	501	7570	Pine St	21st St	Westminster Av	3	AAC	E	2	1,228	30	39,870	82	11	12	77	1/6/2026	Type II Slurry Seal	\$94,492
2029-30	501	7580	Pine St	Maple St	End	3	PCC	E	2	165	20	3,488	61	74	26	0	3/25/2026	PCC Repair	\$13,080
2029-30	554	8240	Santee Ave	Chestnut St	End	3	AAC	E	2	632	33	22,675	84	12	84	4	1/13/2026	Type II Slurry Seal	\$53,740

City of Westminster, CA
Forecast Maintenance Rehabilitation (FMR) Report - FY 2026-2033

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Maint./Rehab Recommendations	Total \$
2029-30	579	8590	Sowell Ave	Goldenwest St	Davis St	3	AAC	E	2	1,136	33	36,535	76	41	59	0	1/13/2026	Type II Slurry Seal	\$86,588
2029-30	581	8670	Spruce St	Goldenwest St	Locust St	3	AC	E	2	573	33	21,616	58	62	38	0	1/13/2026	AC Grind-Overlay	\$105,270
2029-30	582	8721	Stahov Ave	Illinois St	End	3	AC	E	2	230	33	10,346	82	0	100	0	12/26/2025	Type II Slurry Seal	\$24,520
2029-30	604	9000	Syracuse St	Lehigh Pl	Colgate Av	3	AC	E	2	965	36	33,691	65	64	36	0	1/20/2026	AC Grind-Overlay	\$164,075
2029-30	612	9100	Texas St	Olive St	Illinois St	3	AC	E	2	200	30	10,922	55	30	29	41	1/6/2026	AC Grind-Overlay	\$53,190
2029-30	645	9640	Village Wy	Maple St	End	3	AC	E	2	325	33	14,620	50	52	48	0	3/25/2026	AC Grind-Overlay	\$71,199
																			\$1,793,952
2030-31	20	480	Alcester St	Sabre Ln	Greenville Ave	5	AC	E	2	1,400	33	46,189	75	37	63	0	1/26/2026	Type II Slurry Seal	\$114,087
2030-31	85	10645	Bolsa Ave Frontage Rd	Alley 23	Purdy St	5	AC	E	2	960	29	26,197	54	20	37	43	1/19/2026	AC Grind-Overlay	\$132,819
2030-31	87	1490	Boone Cir	Bowie St	End	5	AC	E	2	400	33	15,936	81	0	94	6	1/9/2026	Type II Slurry Seal	\$39,362
2030-31	96	1600	Bromley St	Chesire Ave	Newcastle Ave	5	AAC	E	2	600	32	17,917	71	20	80	0	1/27/2026	Type II Slurry Seal	\$44,255
2030-31	174	2740	Crockett Cir	Bowie St	End	5	AC	E	2	400	33	14,241	82	11	74	15	1/9/2026	Type II Slurry Seal	\$35,175
2030-31	214	3210	Eden St	McFadden Ave	St Andrews Ave	5	AAC	E	2	885	33	31,140	82	0	70	30	1/7/2026	Type II Slurry Seal	\$76,916
2030-31	214	3215	Eden St	Thorpe Ave	McFadden Ave	5	AAC	E	2	240	33	8,108	85	35	56	9	2/2/2026	Type II Slurry Seal	\$20,027
2030-31	276	4140	Greenville Ave	Alcester St	Magnolia St	5	AC	E	2	900	33	30,075	66	62	23	15	1/26/2026	AC Grind-Overlay	\$152,480
2030-31	287	4290	Harper St	Satinwood Cir	Bolsa Ave	5	AAC	E	2	150	36	5,397	78	0	100	0	2/2/2026	Type II Slurry Seal	\$13,331
2030-31	318	4930	Jade Cir	Diamond St	End	5	AC	E	2	200	33	7,750	61	0	70	30	2/2/2026	AC Grind-Overlay	\$39,293
2030-31	387	5920	Marble Cir	Diamond St	End	5	AC	E	2	200	33	7,994	76	0	55	45	2/2/2026	Type II Slurry Seal	\$19,745
2030-31	432	6440	Monroe St	Worthy Dr	Crown Ct	5	AC	E	2	1,050	36	36,445	73	43	55	2	1/21/2026	Type II Slurry Seal	\$90,019
2030-31	441	6580	Nantucket St	McFadden Av	Bermuda Av	5	AAC	E	2	100	35	4,476	85	0	100	0	1/7/2026	Type II Slurry Seal	\$11,056
2030-31	441	6590	Nantucket St	McFadden Av	End	5	AC	E	2	750	42	25,837	69	28	53	19	1/19/2026	Type II Slurry Seal	\$63,817
2030-31	444	6640	Natoma Ave	Eden St	Magnolia St	5	AC	E	2	1,200	33	39,097	74	24	26	50	1/14/2026	Type II Slurry Seal	\$96,570
2030-31	468	7100	Opal Cir	Diamond St	End	5	AC	E	2	200	33	8,036	69	0	67	33	2/2/2026	Type II Slurry Seal	\$19,849
2030-31	470	7130	Ord Wy	Edinger Av	Cody Av	5	AAC	E	2	150	33	6,361	86	0	81	19	2/2/2026	Type II Slurry Seal	\$15,712
2030-31	476	7210	Pacheco Ave	Edinger Av	End	5	AC	E	2	250	33	9,425	82	32	33	35	1/19/2026	Type II Slurry Seal	\$23,280
2030-31	476	7220	Pacheco Ave	Purdy St	Webster St	5	AC	E	2	1,200	33	37,458	82	0	51	49	1/19/2026	Type II Slurry Seal	\$92,521
2030-31	524	7860	Rathburn Ave	Padres Av	End	5	AC	E	2	300	33	9,359	76	0	42	58	1/19/2026	Type II Slurry Seal	\$23,117
2030-31	524	7870	Rathburn Ave	Purdy St	Neece St	5	AC	E	2	900	33	30,600	65	13	35	52	1/19/2026	AC Grind-Overlay	\$155,142
2030-31	545	8170	Sabre Ln	Alcester St	End	5	AC	E	2	860	33	31,616	75	29	37	34	2/25/2026	Type II Slurry Seal	\$78,092
2030-31	545	8180	Sabre Ln	Moran St	Bushard St	5	AC	E	2	1,150	33	36,045	81	12	86	2	1/21/2026	Type II Slurry Seal	\$89,031
2030-31	553	8230	Sandusky Ln	McFadden Av	End	5	AC	E	2	350	40	15,898	53	18	64	18	1/9/2026	AC Grind-Overlay	\$80,603
2030-31	614	9150	Tilden St	Hazard Av	Sabre Ln	5	AC	C	2	800	33	24,810	74	37	41	22	1/26/2026	Type II Slurry Seal	\$61,281
2030-31	636	9510	Vallecito Av	Winthrop St	End	1	AC	E	2	610	33	20,186	47	85	15	0	11/19/2025	AC Grind-Overlay	\$102,343
2030-31	636	9520	Vallecito Av	Milan Av	Winthrop St	1	AC	E	2	2,170	34	74,104	67	77	23	0	11/19/2025	Type II Slurry Seal	\$183,037
2030-31	638	14230	Van Buren St	City Limit	Worthy Dr	5	AC	E	0	523	33	15,487	72	0	100	0	1/21/2026	Type II Slurry Seal	\$38,253
2030-31	638	9550	Van Buren St	McFadden Av	City Limit	5	AC	C	2	608	33	20,374	78	8	92	0	1/21/2026	Type II Slurry Seal	\$50,324
2030-31	647	9660	Vogel Ave	Ord Wy	Jenner St	1	AAC	E	2	300	33	11,544	57	0	100	0	1/5/2026	AC Grind-Overlay	\$58,528
2030-31	664	9880	Wells Rd	End	End	1	AC	E	2	1,050	33	35,344	59	61	39	0	12/10/2025	AC Grind-Overlay	\$179,194
2030-31	670	10090	Westmoreland Cir	Wiltshire St	End	1	AAC	E	2	492	33	17,516	79	36	64	0	11/24/2025	Type II Slurry Seal	\$43,265
																			\$2,242,521
2031-32	60	1000	Begonia St	Calendula Ave	Jonquil Ave	6	AC	E	2	660	36	22,677	68	18	82	0	1/13/2026	Type II Slurry Seal	\$58,280
2031-32	62	1020	Belgrade St	Bishop Pl	McFadden Ave	6	AAC	E	2	1,300	40	48,412	67	26	74	0	1/12/2026	Type II Slurry Seal	\$124,419
2031-32	71	1151	Bevan Ave	Poinsettia Wy	East End	6	AAC	E	2	525	33	19,105	83	0	53	47	1/14/2026	Type II Slurry Seal	\$49,100
2031-32	93	1570	Brighton St	Melric Ave	Bolsa Ave	6	AC	E	2	800	35	28,150	70	34	43	23	1/22/2026	Type II Slurry Seal	\$72,346
2031-32	119	1980	Cardinal Ave	Bushard St	End	6	AAC	E	2	900	33	29,945	60	55	44	1	1/12/2026	AC Grind-Overlay	\$157,810
2031-32	173	2730	Coronet Ave	West End	East End	6	AAC	E	2	1,600	33	64,092	68	21	49	30	1/13/2026	Type II Slurry Seal	\$164,716
2031-32	175	2750	Cromwell Cir	Duke Dr	End	6	AAC	E	2	350	33	12,085	80	0	98	2	1/12/2026	Type II Slurry Seal	\$31,058
2031-32	197	3010	Dickens Cir	Oakcliff Dr	End	6	AC	E	2	400	33	16,348	81	16	74	10	1/14/2026	Type II Slurry Seal	\$42,014
2031-32	232	3540	Essex Cir	Melric Ave	End	6	AC	E	2	400	30	15,319	68	39	48	13	1/22/2026	Type II Slurry Seal	\$39,370
2031-32	235	3570	Exeter St	Northampton Ave	Banbury Ave	6	AAC	E	2	360	33	15,057	74	6	68	26	1/27/2026	Type II Slurry Seal	\$38,696
2031-32	240	3620	Finchley Ave	Petsworth Ln	Golders Green Ln	6	AC	E	2	1,140	37	41,801	83	0	100	0	1/28/2026	Type II Slurry Seal	\$107,429
2031-32	282	4220	Halfax Ave	Ward St	Brighton St	6	AC	E	2	380	35	11,433	68	19	76	5	1/22/2026	Type II Slurry Seal	\$29,383
2031-32	292	4420	Heather Ct	Forrest Ln	End	6	AC	E	2	90	30	5,316	68	10	90	0	1/28/2026	Type II Slurry Seal	\$13,662
2031-32	314	4840	Iris Cir	Calendula Ave	End	6	AC	E	2	450	33	15,873	69	0	100	0	1/13/2026	Type II Slurry Seal	\$40,794
2031-32	361	5520	Lava Wy	Obsidian Dr	End	6	AC	E	2	400	33	15,282	74	14	86	0	2/2/2026	Type II Slurry Seal	\$39,275
2031-32	364	5560	Leeds Cir	Melric Av	End	6	AC	E	2	400	33	15,277	73	24	58	18	1/22/2026	Type II Slurry Seal	\$39,262
2031-32	368	5610	Lilac Cir	Poinsettia Wy	End	6	AC	E	2	250	33	10,360	68	52	19	29	2/2/2026	Type II Slurry Seal	\$26,625
2031-32	382	5810	Maldstone St	Northampton Av	City Limit	6	AAC	E	2	525	37	20,163	80	9	67	24	1/27/2026	Type II Slurry Seal	\$51,819
2031-32	469	7110	Orchid Dr	Canna St	Azalea Wy	6	AC	E	2	1,000	33	31,414	79	37	31	32	1/8/2026	Type II Slurry Seal	\$80,734
2031-32	484	7370	Parkview Ave	Golders Green Ln	End	6	AC	E	2	750	33	25,231	78	13	87	0	1/27/2026	Type II Slurry Seal	\$64,844
2031-32	484	7380	Parkview Ave	Petsworth Ln	Golders Green Ln	6	AC	E	2	1,136	36	41,413	79	34	59	7	1/28/2026	Type II Slurry Seal	\$106,431
2031-32	484	7385	Parkview Ave	Ward St	Petsworth Ln	6	AC	E	2	660	36	21,737	55	26	38	36	1/28/2026	AC Grind-Overlay	\$114,554
2031-32	499	7540	Pickford St	Melric Av	Cunningham Av	6	AC	E	2	630	33	21,228	70	47	43	10	4/19/2022	Type II Slurry Seal	\$54,556
2031-32	506	7630	Poinsettia Wy	McFadden Av	Coronet Av	6	AC	E	2	1,100	36	39,890	75	16	68	16	1/13/2026	Type II Slurry Seal	\$102,517
2031-32	506	7640	Poinsettia Wy	Larkspur Dr	McFadden Av	6	AC	E	2	1,408	33	42,864	77	52	37	11	1/8/2026	Type II Slurry Seal	\$110,160
2031-32	507	7650	Poppy Cir	Poppy Wy	End	6	AC	E	2	200	33	11,516	79	42	51	7	1/19/2026	Type II Slurry Seal	\$29,596

City of Westminster, CA
Forecast Maintenance Rehabilitation (FMR) Report - FY 2026-2033

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Maint./Rehab Recommendations	Total \$
2031-32	508	7660	Poppy Wy	Orchid Dr	Poppy Cir	6	AC	E	2	300	33	9,763	78	25	53	22	1/19/2026	Type II Slurry Seal	\$25,091
2031-32	559	8300	Sean Wy	Bushard St	End	6	AC	E	2	400	33	14,750	69	5	95	0	2/2/2026	Type II Slurry Seal	\$37,908
2031-32	584	8730	Star Bright Cir	Bowling Green St	End	6	AC	E	2	360	34	13,151	73	0	100	0	1/27/2026	Type II Slurry Seal	\$33,798
2031-32	586	8750	Stengal St	Stern Av	End	6	AAC	E	2	320	33	13,647	82	37	63	0	1/28/2026	Type II Slurry Seal	\$35,073
2031-32	586	8760	Stengal St	Stern Av	End	6	AAC	E	2	550	33	19,474	84	35	50	15	1/28/2026	Type II Slurry Seal	\$50,048
2031-32	602	8980	Swallow Ln	Bishop Pl	McFadden Av	6	AC	E	2	1,263	33	42,576	68	47	53	0	1/12/2026	Type II Slurry Seal	\$109,420
2031-32	610	9070	Tennyson Ave	Fleming St	End	6	AAC	E	2	400	35	18,206	55	27	72	1	1/22/2026	AC Grind-Overlay	\$95,946
2031-32	666	9910	Westhaven Cir	Butterfield St	End	6	AAC	E	2	750	33	27,554	80	0	100	0	1/12/2026	Type II Slurry Seal	\$70,814
2031-32	677	10180	Whispering Pine Cir	Bowling Green St	Brookhurst St	6	AC	E	2	320	34	11,040	73	7	93	0	1/27/2026	Type II Slurry Seal	\$28,373
																			\$2,275,921
2032-33	21	490	Alfred Ave	Hammon Pl	End	1	AC	E	2	121	48	6,254	79	28	72	0	12/1/2025	Type II Slurry Seal	\$16,698
2032-33	21	500	Alfred Ave	Milan Ave	Hammon Pl	1	AC	E	2	1,112	33	37,312	79	46	45	9	12/1/2025	Type II Slurry Seal	\$99,623
2032-33	53	920	Barber St	Harold Pl	Rancho Rd	1	AC	E	2	855	33	28,078	64	18	48	34	11/24/2025	AC Grind-Overlay	\$153,867
2032-33	56	960	Barry Pl	Newland St	Tryon St	1	AC	E	2	450	33	15,546	64	53	34	13	1/5/2026	AC Grind-Overlay	\$85,192
2032-33	67	1070	Berkeley Ave	Winthrop St	End	1	AC	E	2	557	32	20,078	64	73	27	0	11/19/2025	Type II Slurry Seal	\$53,608
2032-33	67	1080	Berkeley Ave	University St	Winthrop St	1	AC	E	2	1,296	33	42,046	72	78	22	0	11/19/2025	Type II Slurry Seal	\$112,263
2032-33	73	1170	Bexley St	Shrewsbury Ave	Somerset St	1	AC	E	2	221	37	10,250	57	61	36	3	11/25/2025	Type II Slurry Seal	\$27,368
2032-33	106	1780	Bush St	Westminster Ave	End	1	AAC	E	2	656	30	22,745	47	13	77	10	12/1/2025	Type II Slurry Seal	\$60,729
2032-33	113	1890	Cambridge Ave	Winthrop St	End	1	AC	E	2	562	32	20,499	69	74	26	0	11/19/2025	Type II Slurry Seal	\$54,732
2032-33	113	1900	Cambridge Ave	Univeristy St	Winthrop St	1	AC	E	2	1,272	32	45,733	69	72	28	0	11/19/2025	Type II Slurry Seal	\$122,107
2032-33	147	2400	Churchill Ave	Bolsa Chica Rd	End	1	AC	E	2	770	37	30,239	68	51	47	2	11/25/2025	Type II Slurry Seal	\$80,738
2032-33	158	2540	College St	Westminster Ave	Somerset St	1	AC	E	2	270	47	11,538	64	48	52	0	11/25/2025	Type II Slurry Seal	\$30,806
2032-33	158	2550	College St	Westminster Ave	Harvard Ave	1	AC	E	2	586	33	18,302	50	82	18	0	11/19/2025	Type II Slurry Seal	\$48,866
2032-33	162	2600	Comet Cir	Galaxy Dr	End	1	AC	E	2	500	33	18,481	61	57	43	0	1/6/2026	Type II Slurry Seal	\$49,344
2032-33	182	2830	Dana Cir	Heil Ave	End	1	AC	E	2	850	33	28,366	67	49	51	0	12/10/2025	Type II Slurry Seal	\$75,737
2032-33	206	3100	Drey Rd	Dana Cir	Jody Cir	1	AC	E	2	550	33	19,107	54	81	19	0	12/10/2025	Type II Slurry Seal	\$51,016
2032-33	213	3190	Ed Bane Cir	Lunar St	End	1	AC	E	2	200	32	7,873	71	27	58	15	1/6/2026	Type II Slurry Seal	\$21,021
2032-33	228	3500	Enfield Cir	Horsham Ave	End	1	AC	E	2	694	37	28,190	51	86	14	0	11/25/2025	Type II Slurry Seal	\$75,267
2032-33	250	3740	Galaxy Dr	Heil Ave	Universe Ave	1	AC	E	2	1,200	33	35,697	62	54	46	0	1/6/2026	Type II Slurry Seal	\$95,311
2032-33	283	4230	Hammon Pl	Westminster Ave	Rochelle Ave	1	AC	E	2	814	34	28,628	63	46	26	28	12/1/2025	AC Grind-Overlay	\$156,881
2032-33	283	4240	Hammon Pl	Rochelle Ave	Vallecito Dr	1	AC	C	2	1,031	34	33,402	82	27	61	12	12/1/2025	Type II Slurry Seal	\$89,183
2032-33	286	4280	Graham St	Harold Pl	Hammon Pl	1	AAC	E	2	1,294	36	48,660	73	17	83	0	11/24/2025	Type II Slurry Seal	\$129,922
2032-33	289	4330	Harvard Ave	Winthrop St	End	1	AC	E	2	617	33	20,909	57	84	16	0	11/19/2025	AC Grind-Overlay	\$114,581
2032-33	289	4340	Harvard Ave	University St	Winthrop St	1	AC	E	2	1,259	33	45,216	65	73	27	0	11/19/2025	AC Grind-Overlay	\$247,784
2032-33	294	11500	Heil Ave	Venus Dr	Magnolia St	1	AC	E	2	700	32	17,990	53	63	37	0	1/6/2026	Type II Slurry Seal	\$48,033
2032-33	312	4820	Ipswich St	Horsham Ave	Tattershall Ave	1	AC	E	2	470	44	19,012	46	76	24	0	11/25/2025	Type II Slurry Seal	\$50,762
2032-33	323	5010	Jenner St	Vogel Av	Orwell Av	1	AAC	E	2	900	33	31,503	56	22	78	0	1/5/2026	AC Grind-Overlay	\$172,636
2032-33	325	5060	Jim St	Wells Rd	End	1	AC	E	2	250	33	7,401	38	78	22	0	12/10/2025	Type II Slurry Seal	\$19,761
2032-33	326	5070	Jody Cir	Drey Rd	End	1	AC	E	2	750	33	27,989	49	82	18	0	12/10/2025	Type II Slurry Seal	\$74,731
2032-33	351	5410	La Verne Cir	Milan St	End	1	AC	E	2	330	33	12,525	65	89	10	1	12/2/2025	AC Grind-Overlay	\$68,637
2032-33	353	5430	Lancashire Ave	Hammon Pl	Hereford St	1	AAC	E	2	873	36	31,431	69	17	83	0	11/24/2025	Type II Slurry Seal	\$83,921
2032-33	362	5530	Lawrence Ave	Quartz St	End	1	AC	E	2	750	36	30,827	69	28	72	0	1/6/2026	Type II Slurry Seal	\$82,308
2032-33	374	5700	Loyola Ave	Winthrop St	Bolsa Chica Rd	1	AC	E	2	613	32	19,830	69	46	54	0	11/19/2025	Type II Slurry Seal	\$52,946
2032-33	375	5720	Lunar St	Universe Av	End	1	AC	E	2	500	33	17,893	58	53	37	10	1/6/2026	Type II Slurry Seal	\$47,774
2032-33	420	6260	Milan Ave	Westminster Av	End	1	AC	E	2	890	37	32,956	69	21	79	0	11/24/2025	Type II Slurry Seal	\$87,993
2032-33	420	6280	Milan Ave	Alfred Av	Vallecito Av	1	AC	E	2	1,231	33	47,092	67	9	88	3	12/1/2025	Type II Slurry Seal	\$125,736
2032-33	420	6290	Milan Ave	Westminster Av	Alfred Av	1	AC	E	2	1,234	33	32,995	54	26	62	12	12/1/2025	AC Grind-Overlay	\$180,813
2032-33	421	6300	Milan St	Vallecito Av	Duncannon Av	1	AC	E	2	1,311	33	50,185	68	0	81	19	12/1/2025	Type II Slurry Seal	\$133,994
2032-33	422	6310	Milky Wy	Galaxy Dr	End	1	AC	E	2	250	33	9,955	52	57	36	7	1/7/2026	Type II Slurry Seal	\$26,580
2032-33	470	7120	Ord Wy	Edging Av	Vogel Av	1	AAC	E	2	100	33	5,544	58	0	100	0	1/5/2026	AC Grind-Overlay	\$30,381
2032-33	495	7490	Pepperline Cir	Lowell Cir	End	1	AC	E	2	354	33	13,896	67	89	11	0	12/2/2025	Type II Slurry Seal	\$37,102
2032-33	540	8120	Ross Cir	Heil Av	End	1	AC	E	2	300	33	10,794	70	65	35	0	1/5/2026	Type II Slurry Seal	\$28,820
2032-33	541	8130	Rotherham Cir	Somerset St	End	1	AC	E	2	370	33	14,618	52	52	39	9	11/25/2025	AC Grind-Overlay	\$80,107
2032-33	566	8400	Sherwood St	Westminster Av	End	1	AAC	E	2	937	34	33,903	55	10	85	5	12/1/2025	AC Grind-Overlay	\$185,788
2032-33	577	8560	Somerset St	College St	Tattershall Ave	1	AC	E	2	480	37	18,431	54	58	41	1	11/25/2025	AC Grind-Overlay	\$101,002
2032-33	578	8580	Southfield Dr	Churchill Av	South End	1	AC	E	2	532	34	20,527	70	64	33	3	11/25/2025	Type II Slurry Seal	\$54,807
2032-33	578	90056	Southfield Dr	Churchill Av	North End	1	AC	E	2	140	34	6,844	66	51	49	0	11/25/2025	AC Grind-Overlay	\$37,505
2032-33	608	9050	Tattershall Ave	Uxbridge St	Somerset St	1	AC	E	2	1,174	37	46,692	76	25	75	0	11/25/2025	Type II Slurry Seal	\$124,668
2032-33	611	9080	Teri St	Wells Rd	End	1	AC	E	2	350	33	11,866	70	52	48	0	12/10/2025	Type II Slurry Seal	\$31,682
2032-33	634	9450	University St	Westminster Av	Shrewsbury Av	1	AC	E	2	86	44	5,412	43	69	31	0	11/25/2025	Type II Slurry Seal	\$14,450
2032-33	634	9460	University St	Purdue Av	Vallecito Av	1	AAC	E	2	1,105	33	33,505	44	81	19	0	11/19/2025	Type II Slurry Seal	\$89,458
2032-33	634	9470	University St	Westminster Av	Purdue Av	1	AC	E	2	1,325	33	44,932	66	68	32	0	11/19/2025	Type II Slurry Seal	\$119,968
2032-33	636	9510	Vallecito Av	Winthrop St	End	1	AC	E	2	610	33	20,186	47	85	15	0	11/19/2025	Type II Slurry Seal	\$53,897
2032-33	636	9520	Vallecito Av	Milan Av	Winthrop St	1	AC	E	2	2,170	34	74,104	67	77	23	0	11/19/2025	Type II Slurry Seal	\$197,858
2032-33	639	9560	Van Develde Wy	Heil Av	End	1	AC	E	2	150	32	7,984	59	59	40	1	1/6/2026	Type II Slurry Seal	\$21,317
2032-33	642	9590	Venus Dr	Universe Av	Heil Av	1	AC	E	2	1,516	33	47,968	62	60	34	6	1/6/2026	Type II Slurry Seal	\$128,075

City of Westminster, CA
Forecast Maintenance Rehabilitation (FMR) Report - FY 2026-2033

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Maint./Rehab Recommendations	Total \$
2032-33	647	9660	Vogel Ave	Ord Wy	Jenner St	1	AAC	E	2	300	33	11,544	57	0	100	0	1/5/2026	Type II Slurry Seal	\$30,822
2032-33	664	9880	Wells Rd	End	End	1	AC	E	2	1,050	33	35,344	59	61	39	0	12/10/2025	Type II Slurry Seal	\$94,368
2032-33	670	10090	Westmoreland Cir	Wiltshire St	End	1	AAC	E	2	492	33	17,516	79	36	64	0	11/24/2025	Type II Slurry Seal	\$46,768
2032-33	688	10380	Winthrop St	Vallecito Av	Duncannon Av	1	AC	E	2	226	32	7,076	36	85	15	0	4/28/2026	Type II Slurry Seal	\$18,893
2032-33	688	10390	Winthrop St	Harvard Av	Cornell Av	1	AC	E	2	804	32	23,879	61	79	17	4	11/19/2025	Type II Slurry Seal	\$63,757
2032-33	688	10400	Winthrop St	Cornell Av	Vallecito Av	1	AC	E	2	982	32	34,883	71	77	23	0	11/19/2025	Type II Slurry Seal	\$93,138
2032-33	690	10420	Woodruff St	Drey Rd	Wells Rd	1	AC	E	2	1,000	33	29,670	57	59	41	0	12/10/2025	Type II Slurry Seal	\$79,219
																			\$5,073,122

Draft

XII. APPENDIX B – COMPLETE STREET LISTING CURRENT CONDITIONS

Draft

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
		Arterials / Collectors (MPAH)																
82	10602	Bolsa Ave	Ward St	250' E/O Ward St (CL)	6	AC	A	3	250	48	8,050	77	51	49	0	2/2/2026	New Construction - Initial	1/1/1980
82	10610	Bolsa Ave	Ward St	Brookhurst St	6	AC	A	3	2,600	48	105,475	85	32	46	22	1/22/2026	New Construction - Initial	1/1/1980
82	10612	Bolsa Ave	Brookhurst St	Ward St	6	AAC	A	3	2,600	48	108,198	91	11	52	37	1/22/2026	Surface Reconstruction - AC	1/1/2019
82	10620	Bolsa Ave	Brookhurst St	Bushard St	5	AAC	A	3	2,600	48	115,230	100	0	0	0	4/28/2026	Overlay - AC Structural	4/28/2014
82	10622	Bolsa Ave	Bushard St	Brookhurst St	5	AAC	A	3	2,600	48	117,610	100	0	0	0	4/28/2026	Overlay - AC Structural	4/28/2014
82	10630	Bolsa Ave	Bushard St	Magnolia St	5	AAC	A	3	2,600	48	116,983	77	34	46	20	2/26/2026	Overlay - AC Structural	6/26/2013
82	10632	Bolsa Ave	Magnolia St	Bushard St	5	AAC	A	3	2,600	48	102,733	81	21	75	4	2/26/2026	Overlay - AC Structural	6/26/2013
82	10640	Bolsa Ave	Magnolia St	428' e/o Purdy St (CL)	5	AC	A	3	1,350	40	54,724	79	33	61	6	2/26/2026	Surface Treatment - Slurry Seal	10/7/2011
82	10642	Bolsa Ave	250' E/O Purdy St	Magnolia St	5	AC	A	2	1,500	40	58,630	67	74	19	7	2/26/2026	Surface Treatment - Slurry Seal	10/3/2011
82	10650	Bolsa Ave	Goldenwest St	Edwards St (CL)	2	AAC	A	3	2,600	48	113,616	58	60	40	0	12/9/2025	Surface Reconstruction - AC	8/9/2011
82	10662	Bolsa Ave	Newland St	250' E/O Purdy St	5	AC	A	2	1,132	40	41,741	79	71	21	8	2/26/2026	Surface Treatment - Slurry Seal	10/3/2011
82	11180	Bolsa Ave	Hoover St	806' e/o Temple St (CL)	3	AC	A	2	1,293	35	65,107	47	54	40	6	3/31/2026	Patch - AC Mill / Replicae Surface	6/26/2013
82	11181	Bolsa Ave	365' w/o Beach Blvd (CL)	Beach Blvd	3	AC	A	2	325	45	15,969	92	0	100	0	1/21/2026	Surface Treatment - Slurry Seal	10/3/2011
82	11182	Bolsa Ave	806' e/o Temple St (CL)	Hoover St	3	AC	A	2	1,284	45	40,599	70	37	63	0	3/31/2026	New Construction - Initial	1/1/1980
82	11183	Bolsa Ave	Beach Blvd	365' w/o Beach Blvd (CL)	3	AC	A	2	305	37	9,711	92	0	100	0	1/21/2026	New Construction - Initial	1/1/1980
82	1330	Bolsa Ave	Hoover St	405 Bridge	3	AC	A	2	1,744	43	80,364	55	42	46	12	3/31/2026	New Construction - Initial	1/1/1980
82	1332	Bolsa Ave	405 Bridge	Hoover St	3	AC	A	2	1,725	45	79,313	54	46	50	4	3/31/2026	New Construction - Initial	1/1/1980
82	1340	Bolsa Ave	405 Bridge	Goldenwest St	3	AC	A	3	400	50	25,741	100	0	0	0	12/9/2025	New Construction - Initial	1/1/1980
82	1342	Bolsa Ave	Goldenwest St	405 Bridge	3	AC	A	2	431	30	14,178	100	0	0	0	12/9/2025	New Construction - Initial	1/1/1980
82	1350	Bolsa Ave	445' w/o Harper St (CL)	Newland St	5	AC	A	2	730	30	38,708	89	32	68	0	2/26/2026	Surface Treatment - Slurry Seal	10/3/2011
82	14040	Bolsa Ave	365' W/O Beach Blvd (CL)	806' E/O Temple St (CL)	3	AC	A	0	991	35	49,157	92	0	100	0	1/21/2026	New Construction - Initial	1/1/1990
82	14050	Bolsa Ave	806' E/O Temple St (CL)	365' W/O Beach Blvd (CL)	3	AC	A	0	991	42	31,249	92	0	100	0	1/21/2026	New Construction - Initial	1/1/1990
84	11290	Bolsa Chica Rd	Duncannon Ave	Old Bolsa Chica Rd	1	AAC	A	2	1,209	36	46,214	100	0	0	0	4/28/2026	Overlay - AC Structural	4/28/2014
84	11291	Bolsa Chica Rd	Old Bolsa Chica Rd	Duncannon Ave	1	AC	A	3	1,233	42	54,712	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	11292	Bolsa Chica Rd	Old Bolsa Chica Rd	405 Bridge	1	AAC	A	2	1,250	28	37,742	100	0	0	0	12/2/2025	Overlay - AC Structural	4/28/2014
84	11293	Bolsa Chica Rd	405 Bridge	Old Bolsa Chica Rd	1	AC	A	2	1,259	35	49,294	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
84	11294	Bolsa Chica Rd	405 Bridge	22 Bridge	2	AAC	A	3	320	44	13,870	100	0	0	0	12/2/2025	Overlay - AC Structural	4/28/2014
84	11295	Bolsa Chica Rd	22 Bridge	405 Bridge	2	AC	A	2	284	38	13,184	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
84	1420	Bolsa Chica Rd	Westminster Blvd	Loyola Ave	1	AC	A	3	1,103	43	43,742	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1421	Bolsa Chica Rd	Loyola Ave	Westminster Blvd	1	AC	A	3	1,103	43	55,249	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	1450	Bolsa Chica Rd	Rancho Rd	Hampton Ct	1	AC	A	3	1,539	47	69,105	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1451	Bolsa Chica Rd	Hampton Ct	Rancho Rd	1	AC	A	3	1,539	47	72,529	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	1460	Bolsa Chica Rd	Loyola Ave	Duncannon Ave	1	AC	A	3	1,566	46	57,852	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1461	Bolsa Chica Rd	Duncannon Ave	Loyola Ave	1	AC	A	3	1,566	46	59,168	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	1470	Bolsa Chica Rd	Hampton Ct	Westminster Blvd	1	AC	A	3	1,706	47	77,434	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1471	Bolsa Chica Rd	Westminster Blvd	Hampton Ct	1	AC	A	3	1,706	47	69,631	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	11430	Brookhurst St	Hazard St	Bolsa Ave	5	AAC	A	3	2,600	50	120,896	59	42	47	11	3/30/2026	Surface Reconstruction - AC	12/21/2009
98	11432	Brookhurst St	Bolsa Av	Hazard St	5	AC	A	3	2,600	50	117,159	76	22	59	19	3/30/2026	New Construction - Initial	1/1/1980
98	1620	Brookhurst St	McFadden Ave	Margo Ln	6	AAC	A	3	1,200	40	55,492	83	14	62	24	3/30/2026	Overlay - AC Structural	12/30/2013
98	1622	Brookhurst St	Margo Ln	McFadden Av	6	AAC	A	3	1,200	40	52,905	82	36	64	0	3/30/2026	Overlay - AC Structural	12/30/2013
98	1630	Brookhurst St	Bishop Pl	McFadden Ave	6	AC	A	3	1,320	40	62,930	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1632	Brookhurst St	McFadden Av	Bishop Pl	6	AC	A	3	1,320	40	59,831	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1660	Brookhurst St	Bolsa Ave	Bishop Pl	6	AC	A	3	1,320	40	58,101	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1662	Brookhurst St	Bishop Pl	Bolsa Av	6	AC	A	3	1,320	40	58,118	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1670	Brookhurst St	Margo Ln	City Limit	6	AAC	A	3	620	40	23,362	82	22	78	0	3/30/2026	Overlay - AC Structural	12/30/2013
98	1672	Brookhurst St	City Limit	Margo Ln	6	AAC	A	3	800	40	34,737	84	21	79	0	3/30/2026	Overlay - AC Structural	12/30/2013
107	10670	Bushard St	Westminster Ave	Drainage Channel	4	AAC	B	2	1,350	32	73,318	55	25	68	7	3/24/2026	Surface Reconstruction - AC	9/2/2009
107	10680	Bushard St	Drainage Channel	Hazard St	4	AAC	B	4	1,300	60	78,326	57	38	58	4	3/24/2026	Surface Reconstruction - AC	9/2/2009
107	10690	Bushard St	Hazard St	Bolsa Ave	5	AC	B	4	2,600	62	150,818	58	41	51	8	3/30/2026	New Construction - Initial	1/1/1980
107	10700	Bushard St	Bolsa Ave	McFadden Ave	6	AC	B	2	2,600	30	79,143	79	0	96	4	2/20/2026	New Construction - Initial	1/1/1980
107	10702	Bushard St	McFadden Ave	Bolsa Ave	6	AC	A	2	2,600	30	71,582	74	27	71	2	2/20/2026	New Construction - Initial	1/1/1980
107	10710	Bushard St	McFadden Ave	100' N/O Stenson St	6	AC	B	2	1,000	30	30,578	73	48	46	6	2/20/2026	New Construction - Initial	1/1/1980
107	10712	Bushard St	100' N/O Stenson St	McFadden Ave	6	AC	A	2	1,000	30	28,964	70	39	61	0	2/20/2026	New Construction - Initial	1/1/1980
107	10720	Bushard St	100' N/O Stenson St	Edinger Ave	6	AC	B	2	1,600	30	47,645	78	3	76	21	2/20/2026	New Construction - Initial	1/1/1980
107	10722	Bushard St	City Limit	100' N/O Stenson St	6	AC	A	2	785	30	22,514	66	46	49	5	2/20/2026	New Construction - Initial	1/1/1980
217	10730	Edinger Ave	Newland St	Magnolia St	5	AC	A	2	2,600	40	102,102	73	54	36	10	2/20/2026	New Construction - Initial	1/1/1980
217	10732	Edinger Ave	Magnolia St	Newland St	5	AC	A	2	2,600	40	102,662	78	54	45	1	2/20/2026	New Construction - Initial	1/1/1980
217	10740	Edinger Ave	Magnolia St	Bushard St	6	AC	A	2	2,600	34	103,856	56	47	40	13	3/30/2026	New Construction - Initial	1/1/1980
217	10742	Edinger Ave	Bushard St	Magnolia St	6	AC	A	2	2,600	34	104,395	65	57	28	15	2/20/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
217	11490	Edinger Ave	Newland St	405 Fwy (S/S)	5	AC	A	2	1,280	40	47,893	100	0	100	0	12/10/2025	New Construction - Initial	1/1/1980
217	11492	Edinger Ave	405 Fwy (S/S)	Newland St	5	AC	A	2	1,280	40	45,235	100	0	100	0	12/10/2025	New Construction - Initial	1/1/1980
219	11360	Edwards St	405 Fwy (W/S)	Bolsa Ave	2	AAC	B	4	3,100	62	191,989	68	64	36	0	12/9/2025	Surface Reconstruction - AC	8/9/2011
219	11370	Edwards St	Walt St	405 Fwy (E/S)	2	AAC	B	4	1,220	60	70,675	74	34	65	1	4/1/2026	Overlay - AC Structural	3/1/2012
219	11380	Edwards St	Sunside St	Walt St	2	AAC	B	4	278	48	13,870	80	35	63	2	4/1/2026	Overlay - AC Structural	3/1/2012
219	11390	Edwards St	Westminster Ave	Sunside St	2	AAC	B	4	450	62	28,268	63	38	59	3	4/1/2026	Overlay - AC Structural	3/1/2012
219	11400	Edwards St	Bestel St	Trask Ave	2	AC	B	4	660	62	44,184	98	0	100	0	12/23/2025	Surface Treatment - Slurry Seal	10/15/2023
219	11410	Edwards St	Shawnee Rd	Bestel St	2	AC	B	4	1,100	62	64,559	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
219	11420	Edwards St	Garden Grove Blvd	Shawnee Rd	2	AC	B	4	850	62	52,440	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
219	3380	Edwards St	Westminster Ave	Trask Ave	2	AC	B	4	2,635	62	155,635	99	0	100	0	12/23/2025	New Construction - Initial	1/1/1980
252	10760	Garden Grove Blvd	Bolsa Chica Rd	Melanie St	2	AC	B	2	3,650	43	231,462	77	49	47	4	2/9/2026	New Construction - Initial	1/1/1980
252	10770	Garden Grove Blvd	Edwards St	Goldenwest St	2	AC	B	2	2,694	50	169,403	80	46	54	0	2/9/2026	Surface Treatment - Slurry Seal	10/15/2023
252	11210	Garden Grove Blvd	Goldenwest St	Hoover St	3	AC	A	3	2,665	42	109,375	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
252	11211	Garden Grove Blvd	Hoover St	Goldenwest St	3	AC	A	3	2,668	42	111,865	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
252	11220	Garden Grove Blvd	Springdale St	Edwards St	2	AC	A	2	1,320	50	70,112	86	36	64	0	2/9/2026	New Construction - Initial	1/1/1980
252	11230	Garden Grove Blvd	Melanie St	Springdale St	2	AC	A	2	1,895	50	101,710	75	45	55	0	2/9/2026	New Construction - Initial	1/1/1980
252	3770	Garden Grove Blvd	Hoover St	City Limit	3	AC	B	3	1,320	42	50,166	100	0	0	0	1/5/2026	Surface Treatment - Slurry Seal	10/15/2023
252	3771	Garden Grove Blvd	City Limit	Hoover St	3	AC	B	3	1,320	42	59,016	100	0	0	0	1/5/2026	Surface Treatment - Slurry Seal	10/15/2023
269	11340	Goldenwest St	Sowell Ave	405 Fwy (N/S)	3	AC	A	2	560	40	18,771	100	0	100	0	12/17/2025	Unknown Activity	12/12/2008
269	11342	Goldenwest St	405 Fwy (N/S)	Sowell Ave	3	AC	A	3	560	40	23,505	100	0	100	0	12/17/2025	New Construction - Initial	1/1/1980
269	11350	Goldenwest St	405 Fwy (S/S)	Bolsa Ave	3	AC	A	3	483	40	22,886	99	0	100	0	12/9/2025	Unknown Activity	12/12/2008
269	11352	Goldenwest St	Bolsa Ave	405 Fwy (S/S)	3	AC	A	2	450	40	23,685	98	0	100	0	12/9/2025	New Construction - Initial	1/1/1980
269	3980	Goldenwest St	Georgetown Ave	Bolsa Ave	3	AC	A	3	700	40	33,113	97	100	0	0	12/9/2025	New Construction - Initial	1/1/1980
269	3982	Goldenwest St	Bolsa Av	Georgetown Av	3	AC	A	3	700	40	27,514	99	0	100	0	12/9/2025	New Construction - Initial	1/1/1980
269	3990	Goldenwest St	Natal Dr	Garden Grove Blvd	3	AC	A	3	629	40	24,418	49	41	59	0	4/1/2026	New Construction - Initial	1/1/1980
269	3992	Goldenwest St	Garden Grove Blvd	Natal Dr	3	AAC	A	3	629	40	23,780	44	41	59	0	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4000	Goldenwest St	Sowell Ave	Hazard Ave	3	AC	A	3	1,150	40	45,023	61	28	56	16	3/25/2026	Unknown Activity	12/12/2008
269	4002	Goldenwest St	Hazard Ave	Sowell Ave	3	AC	A	3	1,150	40	49,974	54	28	63	9	4/1/2026	New Construction - Initial	1/1/1980
269	4010	Goldenwest St	Hazard Ave	Main St	3	AC	A	3	1,307	40	50,714	53	32	62	6	3/25/2026	New Construction - Initial	1/1/1980
269	4012	Goldenwest St	Main St	Hazard Ave	3	AAC	A	3	1,284	40	50,624	49	50	45	5	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4020	Goldenwest St	Westminster Blvd	Trask Ave	3	AC	A	3	2,600	40	99,429	50	44	36	20	3/25/2026	New Construction - Initial	1/1/1980
269	4022	Goldenwest St	Trask Ave	Westminster Blvd	3	AAC	A	3	2,600	40	109,473	52	31	64	5	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4030	Goldenwest St	Main St	Westminster Blvd	3	AC	A	3	1,322	40	53,891	55	39	58	3	3/25/2026	New Construction - Initial	1/1/1980
269	4032	Goldenwest St	Westminster Blvd	Main St	3	AAC	A	3	1,322	40	49,205	48	38	61	1	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4052	Goldenwest St	McFadden Ave	Georgetown Ave	3	AC	A	6	1,839	80	146,179	54	44	48	8	3/31/2026	New Construction - Initial	1/1/1980
269	4060	Goldenwest St	Trask Ave	Natal Dr	3	AC	A	3	1,990	40	73,885	49	46	51	3	4/1/2026	New Construction - Initial	1/1/1980
269	4062	Goldenwest St	Natal Dr	Trask Ave	3	AAC	A	3	1,990	40	81,335	49	46	54	0	4/1/2026	Surface Reconstruction - AC	9/2/2009
290	10780	Hazard Ave	Goldenwest St	Hoover St	3	AC	B	4	2,600	60	156,867	61	39	52	9	3/25/2026	New Construction - Initial	1/1/1980
290	10790	Hazard Ave	Monroe St	Newland St	4	AC	B	4	1,351	62	73,080	73	0	100	0	2/25/2026	Unknown Activity	5/30/2007
290	10800	Hazard Ave	Colonial Dr	Magnolia St	4	AC	B	4	1,150	62	66,822	63	37	49	14	3/30/2026	Unknown Activity	5/30/2007
290	10810	Hazard Ave	Moran St	670' E/O Bushard St	4	AC	B	4	1,960	50	117,443	84	0	80	20	2/25/2026	New Construction - Initial	1/1/1980
290	11480	Hazard Ave	Brookhurst St	Kerry St	5	AC	B	2	1,240	52	75,279	96	0	100	0	2/25/2026	New Construction - Initial	1/1/1980
290	4350	Hazard Ave	Beach Blvd	Cedarwood Ave	4	AC	B	4	1,306	54	74,695	77	8	92	0	2/26/2026	Surface Reconstruction - PCC	3/30/2011
290	4380	Hazard Ave	Cedarwood Ave	Hoover St	4	AC	B	4	1,304	50	66,153	81	0	100	0	2/26/2026	Surface Reconstruction - PCC	11/17/2011
290	90070	Hazard Ave	Newland Ave	Colonial Dr	4	AC	B	2	1,450	62	84,201	66	29	60	11	3/30/2026	New Construction - Initial	1/1/1980
290	90071	Hazard Ave	Beach Blvd	Monroe St	4	AC	B	2	1,249	62	79,744	67	22	24	54	2/26/2026	New Construction - Initial	1/1/1980
290	90072	Hazard Ave	Magnolia Ave	Moran St	4	AC	B	2	1,300	50	79,808	63	46	41	13	2/25/2026	New Construction - Initial	1/1/1980
290	90073	Hazard Ave	Brookhurst St	Archway Rd	6	AAC	B	2	995	52	59,104	98	0	100	0	2/25/2026	Overlay - AC Structural	6/30/2023
290	90074	Hazard Ave	Archway Dr	Ward St	6	AAC	B	4	1,575	52	94,909	99	0	100	0	2/25/2026	Overlay - AC Structural	6/30/2023
294	10830	Heil Ave	Landau Ln	Newland St	1	AC	B	2	1,350	33	44,823	67	57	41	2	1/5/2026	New Construction - Initial	1/1/1980
294	11510	Heil Ave	Newland St	Beach Blvd	1	AC	B	2	2,500	55	149,736	78	36	52	12	2/20/2026	New Construction - Initial	1/1/1980
299	11300	Hoover St	Hazard Ave	Bolsa Ave	3	AC	B	4	2,600	62	142,030	100	0	0	0	1/7/2026	New Construction - Initial	1/1/1980
299	11310	Hoover St	Garden Grove Blvd	Trask Ave	3	AC	B	4	2,630	62	142,103	100	0	0	0	1/5/2026	New Construction - Initial	1/1/1980
299	11330	Hoover St	Westminster Ave	Hazard St	3	AC	B	4	2,550	62	147,163	100	0	0	0	1/5/2026	Unknown Activity	3/30/2007
299	4530	Hoover St	21st St	Trask Ave	3	AC	B	4	1,267	62	71,117	100	0	0	0	12/29/2025	Unknown Activity	3/30/2007
299	4540	Hoover St	Westminster Ave	21st St	3	AC	B	4	1,269	62	68,799	100	0	0	0	1/5/2026	Unknown Activity	3/30/2007
380	10850	Magnolia Ave	405 Fwy (CL)	Heil Ave	1	AC	A	3	891	35	35,871	100	0	0	0	2/2/2026	Unknown Activity	12/12/2008
380	10851	Magnolia Ave	Heil Ave	405 Fwy (CL)	1	AC	A	3	866	35	29,585	100	0	0	0	2/2/2026	New Construction - Initial	1/1/1980
380	10852	Magnolia Ave	Heil Ave	Universe Ave	1	AC	A	3	1,195	40	42,862	100	0	0	0	2/2/2026	Unknown Activity	12/12/2008
380	10853	Magnolia Ave	Universe Ave	Heil Ave	1	AC	A	3	1,195	40	49,282	100	0	0	0	2/2/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
380	10854	Magnolia Ave	Universe Ave	Edinger Av	6	AC	A	3	1,443	40	57,084	100	0	0	0	2/2/2026	Unknown Activity	12/12/2008
380	10855	Magnolia Ave	Edinger Ave	Universe Ave	1	AC	A	3	1,456	40	55,485	100	0	0	0	2/2/2026	New Construction - Initial	1/1/1980
380	10860	Magnolia Ave	Edinger Av	McFadden Av	5	AC	A	2	2,600	48	99,160	70	43	50	7	2/20/2026	New Construction - Initial	1/1/1980
380	10862	Magnolia Ave	McFadden Av	Edinger Av	5	AC	A	3	2,600	48	109,065	66	34	51	15	2/20/2026	New Construction - Initial	1/1/1980
380	10870	Magnolia Ave	Bishop Pl	Bolsa Av	5	AC	A	2	1,250	48	54,397	79	23	66	11	2/26/2026	New Construction - Initial	1/1/1980
380	10872	Magnolia Ave	Bolsa Av	McFadden Av	5	AC	A	3	2,600	48	101,936	69	36	59	5	2/26/2026	New Construction - Initial	1/1/1980
380	10880	Magnolia Ave	Bolsa Av	Hazard Av	5	AC	A	3	2,600	48	101,921	60	60	32	8	3/24/2026	New Construction - Initial	1/1/1980
380	10882	Magnolia Ave	Hazard Av	Bolsa Av	5	AC	A	3	2,600	48	103,968	58	40	46	14	3/31/2026	New Construction - Initial	1/1/1980
380	10890	Magnolia Ave	Hazard Av	Westminster Av (CL)	4	AC	A	3	2,600	48	105,234	66	47	48	5	3/24/2026	New Construction - Initial	1/1/1980
380	10892	Magnolia Ave	Westminster Blvd (CL)	Hazard Av	4	AC	A	2	2,600	48	101,403	57	24	72	4	3/30/2026	Surface Reconstruction - PCC	10/17/2011
380	90080	Magnolia Ave	McFadden Av	Bishop Pl	5	AC	A	3	1,350	48	50,476	76	16	82	2	2/26/2026	New Construction - Initial	1/1/1980
405	10900	McFadden Ave	Ward St	Brookhurst St	6	AC	A	2	2,600	30	75,853	94	0	100	0	2/20/2026	New Construction - Initial	1/1/1980
405	10901	McFadden Ave	Railroad Crossing	Goldenwest Av	3	AC	A	2	2,600	20	153,135	56	58	34	8	3/31/2026	New Construction - Initial	1/1/1980
405	10902	McFadden Ave	Brookhurst St	Ward St	6	AC	A	2	2,600	30	75,339	89	0	100	0	2/20/2026	New Construction - Initial	1/1/1980
405	10910	McFadden Ave	Brookhurst St	Bushard St	6	AC	A	2	2,600	30	81,716	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
405	10912	McFadden Ave	Bushard St	Brookhurst St	6	AC	A	2	2,600	30	73,932	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
405	10920	McFadden Ave	Bushard St	Magnolia St	6	AC	A	2	2,600	30	65,435	96	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
405	10922	McFadden Ave	Magnolia St	Bushard St	6	AC	A	2	2,600	30	88,249	96	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
405	10930	McFadden Ave	Magnolia St	Newland St	5	AC	A	2	2,600	30	87,055	96	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
405	10932	McFadden Ave	Newland St	Magnolia St	5	AC	A	2	2,600	30	71,541	94	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
405	10940	McFadden Ave	Newland St	Beach Blvd	5	AC	A	2	2,600	30	77,758	96	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
405	10941	McFadden Ave	1320 e/o Beach Blvd	Beach Blvd	5	AC	A	2	1,320	62	80,344	91	0	81	19	1/20/2026	New Construction - Initial	1/1/1980
405	10942	McFadden Ave	Beach Blvd	Newland St	5	AC	A	2	2,600	30	77,358	90	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
451	10960	Newland St	Trask Av (CL)	Westminster Av	4	AC	A	4	2,600	60	154,437	67	55	36	9	2/26/2026	New Construction - Initial	1/1/1980
451	10970	Newland St	Westminster Av	Hazard Av	4	AAC	A	4	2,600	60	155,606	82	33	59	8	2/25/2026	Surface Reconstruction - AC	12/18/2009
451	10980	Newland St	Edinger Av	405 Fwy Bridge	1	AC	A	2	1,100	60	53,327	94	0	6	94	12/10/2025	New Construction - Initial	1/1/1980
451	10981	Newland St	Edinger Av	McFadden Av	5	AC	A	2	2,600	30	77,356	69	40	51	9	3/24/2026	New Construction - Initial	1/1/1980
451	10982	Newland St	McFadden Av	Edinger Av	5	AC	A	2	2,600	30	77,456	75	62	38	0	3/24/2026	New Construction - Initial	1/1/1980
451	10990	Newland St	405 Fwy Bridge	Heil Av	1	AC	A	2	1,200	55	56,652	99	0	100	0	12/10/2025	New Construction - Initial	1/1/1980
451	10991	Newland St	McFadden Av	Bolsa Av	5	AC	A	2	2,600	30	78,941	64	46	52	2	3/24/2026	New Construction - Initial	1/1/1980
451	10992	Newland St	Bolsa Av	McFadden Av	5	AC	A	2	2,600	30	81,892	66	50	49	1	3/24/2026	New Construction - Initial	1/1/1980
523	11240	Rancho Rd	Bolsa Chica Rd	Pavement Change	1	AC	A	2	2,400	48	132,559	64	65	35	0	11/24/2025	Unknown Activity	1/1/2007
523	11250	Rancho Rd	Pavement Change	Westminster Av	1	AAC	A	2	2,315	32	102,112	75	67	26	7	11/24/2025	Overlay - AC Structural	5/30/2016
580	11070	Springdale St	405 Fwy Bridge	Navajo Rd	2	AC	A	2	626	30	18,424	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
580	11071	Springdale St	Meinhardt Rd	405 Fwy Bridge	2	AC	A	2	603	30	17,788	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
580	11072	Springdale St	Navajo Rd	Iroquois Rd	2	AC	A	2	1,858	30	55,286	67	24	74	2	3/25/2026	New Construction - Initial	1/1/1980
580	11073	Springdale St	Iroquois Rd	Meinhardt Rd	2	AC	A	2	1,864	30	57,802	76	26	72	2	3/25/2026	New Construction - Initial	1/1/1980
580	11074	Springdale St	Iroquois Rd	Cynthia Dr	2	AC	A	2	1,322	30	41,834	68	21	79	0	3/25/2026	New Construction - Initial	1/1/1980
580	11075	Springdale St	Cynthia Dr	Iroquois Rd	2	AC	A	2	1,352	30	38,875	66	23	72	5	3/25/2026	New Construction - Initial	1/1/1980
580	11260	Springdale St	22 Fwy Bridge	Cynthia Dr	2	AC	A	2	1,298	30	34,493	65	25	75	0	3/25/2026	Cement Treated Base	9/30/2015
580	11261	Springdale St	Cynthia Dr	22 Fwy Bridge	2	AC	A	2	1,320	30	44,493	72	27	73	0	3/25/2026	Cement Treated Base	9/30/2015
580	11270	Springdale St	405 Fwy Off-Ramp	Westminster Blvd	2	AC	A	2	592	32	22,708	100	0	0	0	12/2/2025	Cement Treated Base	3/1/2012
580	11271	Springdale St	Westminster Blvd	405 Fwy Off-Ramp	2	AC	A	2	560	32	14,635	100	0	0	0	12/2/2025	Cement Treated Base	3/1/2012
580	11280	Springdale St	Westminster Blvd	Chinook Av (100' s/o)	2	AC	A	2	1,780	34	69,721	71	70	30	0	12/2/2025	New Construction - Initial	1/1/1980
580	11281	Springdale St	Chinook (100' s/o)	Westminster Blvd	2	AAC	A	2	1,780	34	75,492	80	31	62	7	12/2/2025	Surface Reconstruction - AC	10/17/2011
623	11200	Trask Ave	Beach Blvd	Newland St	4	AC	A	2	2,650	14	148,977	73	37	61	2	4/1/2026	Unknown Activity	12/12/2008
623	9260	Trask Ave	Arizona St	Hoover St	4	AC	A	4	862	60	54,186	100	0	0	0	1/5/2026	New Construction - Initial	1/1/1980
623	9270	Trask Ave	Hoover St	Chestnut St	3	AC	A	4	1,202	60	76,930	80	51	49	0	12/29/2025	Surface Treatment - Slurry Seal	10/15/2023
623	9280	Trask Ave	Goldenwest St	Siskiyou St	2	AC	A	4	1,173	60	67,620	83	41	59	0	12/30/2025	Surface Treatment - Slurry Seal	10/15/2023
623	9290	Trask Ave	Chestnut St	Goldenwest St	3	AC	A	4	1,400	60	84,855	85	15	85	0	12/29/2025	Surface Treatment - Slurry Seal	10/15/2023
623	9300	Trask Ave	Siskiyou St	Edwards St	2	AC	A	4	1,420	60	85,298	81	60	40	0	12/30/2025	Surface Treatment - Slurry Seal	10/15/2023
623	9310	Trask Ave	Beach Blvd	Arizona St	4	AC	A	4	1,657	60	104,216	100	0	0	0	1/5/2026	New Construction - Initial	1/1/1980
655	11090	Ward St	Mast Ave	Bolsa Av	6	AC	A	2	1,200	32	72,994	94	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
655	11100	Ward St	Melric Av	McFadden Av	6	AC	A	4	1,450	62	81,788	98	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
655	11110	Ward St	McFadden Av	City Limit	6	AC	A	4	1,965	32	117,645	98	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
655	90075	Ward St	Hazard Ave	Mast Ave	6	AC	B	2	1,400	50	88,675	85	0	96	4	2/25/2026	New Construction - Initial	1/1/1980
655	90077	Ward St	Bolsa Ave	Melric Ave	6	AC	A	2	1,150	62	71,729	96	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
668	10010	Westminster Blvd	Hoover St	Jasperson St	4	AC	A	2	1,127	41	39,955	69	19	78	3	3/25/2026	New Construction - Initial	1/1/1980
668	10012	Westminster Blvd	Jasperson St	Hoover St	4	AC	A	2	1,127	42	41,981	73	24	76	0	3/25/2026	Surface Reconstruction - PCC	10/17/2011
668	10030	Westminster Blvd	Beach Blvd	Jasperson Av	4	AC	A	2	1,420	43	55,065	75	28	72	0	3/25/2026	Surface Reconstruction - PCC	10/17/2011

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
668	10032	Westminster Blvd	Jasperson Ave	Beach Blvd	4	AC	A	2	1,420	43	54,553	80	10	74	16	2/26/2026	New Construction - Initial	1/1/1980
668	11120	Westminster Blvd	Bushard St	Magnolia St	4	AAC	A	2	2,600	30	97,139	100	0	0	0	1/21/2026	Overlay - AC Structural	10/30/2022
668	11122	Westminster Blvd	Magnolia St	Bushard St	4	AAC	A	2	2,600	42	95,560	100	0	0	0	1/21/2026	Overlay - AC Structural	10/30/2022
668	11130	Westminster Blvd	Newland St	Newland St	4	AC	A	2	2,600	30	99,608	70	49	50	1	2/26/2026	New Construction - Initial	1/1/1980
668	11132	Westminster Blvd	Newland St	Magnolia St	4	AC	A	2	2,600	42	92,401	78	0	100	0	2/26/2026	New Construction - Initial	1/1/1980
668	11140	Westminster Blvd	Newland St	Beach Blvd	4	AAC	A	3	2,600	42	92,916	96	62	38	0	1/7/2026	Overlay - AC Structural	6/1/2020
668	11142	Westminster Blvd	Beach Blvd	Newland St	4	AAC	A	2	2,600	40	89,290	98	92	8	0	1/7/2026	Overlay - AC Structural	6/1/2020
668	11150	Westminster Blvd	405 Fwy Bridge	Edwards St	2	AC	A	2	1,616	40	65,495	60	64	26	10	3/25/2026	New Construction - Initial	1/1/1980
668	11152	Westminster Blvd	Edwards St	405 Fwy Bridge	2	AC	A	2	1,655	42	63,905	70	42	56	2	3/25/2026	New Construction - Initial	1/1/1980
668	11160	Westminster Blvd	Bolsa Chica Rd	Milan St	1	AC	A	2	2,828	40	97,237	100	0	0	0	11/24/2025	New Construction - Initial	1/1/1980
668	11162	Westminster Blvd	Milan St	Bolsa Chica Rd	1	AAC	A	2	2,828	42	95,935	100	0	0	0	11/24/2025	Surface Reconstruction - AC	10/3/2011
668	11165	Westminster Blvd	Milan St	Springdale St	1	AC	A	2	2,640	40	102,410	79	69	31	0	11/24/2025	New Construction - Initial	1/1/1980
668	11166	Westminster Blvd	Springdale St	405 Fwy Bridge	2	AC	A	2	630	40	28,046	100	0	0	0	11/24/2025	New Construction - Initial	1/1/1980
668	11167	Westminster Blvd	405 Fwy Bridge	Springdale St	2	AC	A	3	630	42	29,631	100	0	0	0	11/24/2025	New Construction - Initial	1/1/1980
668	11168	Westminster Blvd	Springdale St	Milan St	1	AAC	A	2	2,640	42	92,333	73	62	37	1	12/1/2025	Surface Reconstruction - AC	10/3/2011
668	11440	Westminster Blvd	Edwards St	Goldenwest St	2	AAC	A	2	2,650	40	94,892	89	58	35	7	2/25/2026	Overlay - AC Structural	5/22/2017
668	11442	Westminster Blvd	Goldenwest St	Edwards St	2	AAC	A	3	2,650	42	107,207	83	79	21	0	2/25/2026	Overlay - AC Structural	4/30/2016
668	11460	Westminster Blvd	Goldenwest St	Hoover St	3	AC	A	2	2,680	40	90,070	100	0	0	0	1/6/2026	New Construction - Initial	1/1/1980
668	11462	Westminster Blvd	Hoover St	Goldenwest St	3	AC	A	2	2,680	42	97,722	100	0	0	0	1/6/2026	New Construction - Initial	1/1/1980
									63.4		14,516,980							
		Locals																
1	10	10th St	Beach Blvd	Pacific Ave	4	AAC	E	2	598	36	22,786	62	6	68	26	1/14/2026	Overlay - AC Structural	4/1/2009
1	20	10th St	Pacific Ave	Cedarwood Ave	4	AC	E	2	674	36	23,030	60	0	97	3	1/14/2026	Unknown Activity	4/1/2009
2	30	11th St	Pacific Ave	Beach Blvd	4	AC	E	2	600	36	20,774	68	28	66	6	1/14/2026	New Construction - Initial	1/1/1980
2	40	11th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	609	36	22,786	67	35	55	10	1/14/2026	New Construction - Initial	1/1/1980
3	50	12th St	Pacific Ave	Beach Blvd	4	AC	E	2	606	33	18,835	48	3	29	68	1/14/2026	New Construction - Initial	1/1/1980
3	60	12th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	618	33	20,990	79	8	19	73	1/14/2026	New Construction - Initial	1/1/1980
5	100	13th St	Beach Blvd	All-Ameican Way	4	AC	E	2	1,200	36	47,777	72	36	64	0	1/19/2026	Unknown Activity	1/1/2007
5	70	13th St	Cedarwood Ave	Joyce Ave	4	AC	E	2	533	33	17,739	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
5	80	13th St	Pacific Ave	Beach Blvd	4	AC	C	2	585	33	20,662	73	11	46	43	1/14/2026	New Construction - Initial	1/1/1980
5	90	13th St	Cedarwood Ave	Pacific Ave	4	AC	C	2	616	33	21,107	76	13	47	40	1/14/2026	New Construction - Initial	1/1/1980
6	110	14th St	Cedarwood Ave	End	4	AC	E	2	524	36	16,868	100	0	0	0	1/14/2026	Surface Treatment - Slurry Seal	6/14/2010
6	120	14th St	Pacific Ave	Beach Blvd	4	AC	E	2	589	36	20,386	61	23	39	38	1/14/2026	New Construction - Initial	1/1/1980
6	130	14th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	615	36	21,590	59	36	28	36	1/14/2026	New Construction - Initial	1/1/1980
7	140	15th St	Pacific Ave	Beach Blvd	4	AC	E	2	600	36	20,766	86	0	39	61	1/14/2026	New Construction - Initial	1/1/1980
7	150	15th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	608	36	21,876	52	0	23	77	1/14/2026	New Construction - Initial	1/1/1980
7	160	15th St	Beach Blvd	Jackson St	4	AC	E	2	600	33	23,069	72	13	81	6	1/19/2026	Unknown Activity	12/30/2012
7	170	15th St	All-American Way	Newland St	4	AC	C	2	1,250	33	43,377	77	40	60	0	1/19/2026	Unknown Activity	1/1/2007
8	180	16th St	Pacific Ave	Beach Blvd	4	AC	E	2	595	36	18,292	73	47	37	16	1/14/2026	New Construction - Initial	1/1/1980
8	190	16th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	607	36	21,621	68	5	54	41	1/14/2026	New Construction - Initial	1/1/1980
8	200	16th St	Beach Blvd	Jackson St	4	AC	E	2	550	33	19,126	72	7	84	9	1/19/2026	New Construction - Initial	1/1/1980
9	210	18th St	Pacific Ave	Beach Blvd	4	AAC	E	2	609	33	20,179	71	24	76	0	1/6/2026	Overlay - AC Structural	1/30/2014
9	220	18th St	Beach Blvd	Monroe St	4	AC	E	2	1,209	33	38,436	64	34	25	41	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
10	230	19th St	Richardson Wy	Pacific Ave	4	AAC	E	2	467	33	16,026	77	17	81	2	1/6/2026	Overlay - AC Structural	1/30/2014
10	240	19th St	Pacific Ave	Beach Blvd	4	AAC	E	2	653	31	21,507	74	9	91	0	1/6/2026	Overlay - AC Structural	1/30/2014
10	250	19th St	Beach Blvd	Monroe St	4	AC	E	2	1,201	33	39,425	84	12	65	23	1/7/2026	Surface Treatment - Slurry Seal	7/31/2011
11	260	20th Pl	Harper St	End	4	AAC	E	2	300	33	10,640	69	24	45	31	1/7/2026	Overlay - AC Structural	2/1/2010
12	270	20th St	Cherry St	Olive St	3	AAC	E	2	752	32	25,244	70	64	31	5	1/6/2026	Overlay - AC Structural	10/20/2008
12	275	20th St	Richardson Wy	Pacific Ave	4	AC	E	2	467	33	15,129	86	57	43	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
12	280	20th St	Beach Blvd	End	4	AC	E	2	1,721	33	53,818	85	13	85	2	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
13	290	21st St	Hospital Cir	Hoover St	4	AC	C	2	691	36	28,021	97	0	100	0	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
13	300	21st St	Hoover St	Cherry St	3	AC	C	2	1,446	36	51,936	88	34	62	4	12/26/2025	Surface Treatment - Slurry Seal	7/13/2011
13	310	21st St	Cherry St	Goldenwest St	3	AC	C	2	1,209	36	40,406	80	53	42	5	12/26/2025	New Construction - Initial	1/1/1980
13	320	21st St	Hospital Cir	Beach Blvd	4	AAC	E	2	1,364	32	41,354	78	17	72	11	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
13	330	21st St	Beach Blvd	Monroe St	4	AC	E	2	1,211	33	39,627	87	0	90	10	1/7/2026	New Construction - Initial	1/1/1980
14	340	22nd St	Richardson Wy	Pacific Ave	4	AC	E	2	476	32	15,778	93	55	45	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
14	350	22nd St	Beach Blvd	Monroe St	4	AC	E	2	1,206	33	37,697	87	0	96	4	1/7/2026	New Construction - Initial	1/1/1980
15	360	23rd St	Richardson Wy	Pacific Ave	4	AC	E	2	480	32	15,507	90	58	42	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
15	370	23rd St	Pacific Ave	Beach Blvd	4	AAC	E	2	637	31	22,464	73	25	75	0	1/6/2026	Overlay - AC Structural	1/30/2014
15	380	23rd St	Arizona St	Hoover St	4	AAC	E	2	729	37	28,172	88	43	57	0	1/5/2026	Overlay - AC Structural	3/25/2010

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
15	390	23rd St	Wilson St	Newland St	4	AC	E	2	650	33	19,144	67	20	80	0	1/7/2026	New Construction - Initial	1/1/1980
15	400	23rd St	Beach Blvd	Monroe St	4	AC	E	2	1,228	33	43,293	72	47	26	27	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
15	405	23rd St	Monroe St	Wilson St	4	AC	E	2	680	33	22,165	65	29	71	0	1/7/2026	New Construction - Initial	1/1/1980
16	410	24th St	Descanso Dr	End	4	AAC	E	2	704	33	27,334	84	0	95	5	1/5/2026	Overlay - AC Structural	1/1/2020
17	430	Abbey Dr	Barney St	Dorfsmith Dr	2	AC	E	2	840	33	28,525	74	33	67	0	12/15/2025	New Construction - Initial	1/1/1980
18	440	Abington Cir	End	Parkview Ave	6	AAC	E	2	550	33	18,809	98	0	100	0	1/28/2026	Overlay - AC Structural	9/15/2023
19	450	Abraham Ave	Willow Ln	Ida Wy	2	AAC	E	2	300	33	13,070	97	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
19	460	Abraham Ave	Hammon Pl	End	1	AC	E	2	813	33	27,545	89	0	71	29	12/1/2025	2" Conventional Overlay	4/21/2016
19	470	Abraham Ave	Hammon Pl	Milan Ave	1	AC	E	2	1,114	33	38,423	82	36	51	13	12/1/2025	New Construction - Initial	1/1/1980
20	480	Alcester St	Sabre Ln	Greenville Ave	5	AC	E	2	1,400	33	46,189	75	37	63	0	1/26/2026	Unknown Activity	1/1/2008
21	490	Alfred Ave	Hammon Pl	End	1	AC	E	2	121	48	6,254	79	28	72	0	12/1/2025	New Construction - Initial	1/1/1980
21	500	Alfred Ave	Milan Ave	Hammon Pl	1	AC	E	2	1,112	33	37,312	79	46	45	9	12/1/2025	New Construction - Initial	1/1/1980
999	6450	All American Way	Westminster Ave	13th St	4	AC	E	2	1,249	36	51,565	74	8	53	39	1/19/2026	New Construction - AC	1/1/1980
22	510	Allen St	Santee Ave	Sowell Ave	3	AAC	E	2	655	34	21,674	81	0	89	11	1/13/2026	Overlay - AC Structural	6/12/2013
23	520	Allison Cir	Meinhardt Rd	End	2	AC	E	2	313	33	12,647	92	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
24	530	Alta St	Harold Pl	Rancho Rd	1	AC	E	2	576	33	19,051	62	39	23	38	11/24/2025	New Construction - Initial	1/1/1980
25	540	Amador Ave	Milan Ave	Vallecito Dr	1	AC	E	2	881	34	29,670	76	0	100	0	12/1/2025	New Construction - Initial	1/1/1980
26	550	Amarillo Dr	Brooklawn Dr	Benton Ave	3	AAC	E	2	1,177	34	38,017	78	0	47	53	2/19/2026	Overlay - AC Structural	1/1/2019
27	560	Ambassador Dr	Commonwealth Pl	Royal Pl	6	AC	E	2	650	36	21,113	80	41	59	0	1/8/2026	2" Conventional Overlay	4/21/2016
28	570	Amherst Cir	Colgate Ave	End	3	AC	E	2	150	32	6,820	73	41	48	11	2/20/2026	New Construction - Initial	1/1/1980
29	580	Amidon Cir	Jefferson St	End	4	AAC	E	2	150	33	5,776	80	0	100	0	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
30	590	Amidon Pl	Harper St	End	4	AC	E	2	300	33	10,610	82	11	89	0	1/7/2026	Surface Treatment - Slurry Seal	4/28/2014
31	600	Anawood Wy	Duncannon Ave	Buckingham Cir	1	AC	E	2	1,746	33	57,980	99	0	0	100	12/1/2025	New Construction - Initial	1/1/1980
32	620	Anita Cir	Lehigh Pl	End	3	AAC	E	2	180	33	7,462	85	0	100	0	1/20/2026	Overlay - AC Structural	12/30/2013
33	630	Apache Rd	Klamath Dr	Sioux Rd	2	AC	E	2	760	37	29,378	76	35	52	13	12/16/2025	New Construction - Initial	1/1/1980
33	640	Apache Rd	Seneca Dr	Edwards St	2	AC	E	2	974	33	42,973	92	31	69	0	12/16/2025	Cold Mill and Overlay	3/10/2011
33	650	Apache Rd	Seneca Dr	Klamath Dr	2	AC	E	2	1,043	38	41,871	63	60	35	5	12/16/2025	New Construction - Initial	1/1/1980
34	660	Archway Rd	Hazard Ave	Bellehurst Ave	6	AC	E	2	120	37	3,802	88	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
704	670	Arizona St	Bestal Ave	Benton Ave	3	AC	E	2	591	33	19,671	90	26	68	6	1/5/2026	Cold Mill and Overlay	2/2/2008
704	680	Arizona St	Hospital Cir	Trask Ave	4	AC	C	2	770	37	29,806	92	46	54	0	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
704	690	Arizona St	Westminster Ave	Hospital Cir	4	AC	C	2	1,100	33	38,350	79	8	61	31	1/5/2026	Unknown Activity	5/15/2008
35	700	Arundel Ave	Kensington Ln	Forrest Ln	6	AC	E	2	936	33	33,557	73	18	72	10	1/28/2026	New Construction - Initial	1/1/1980
37	720	Arvilla Pl	Wilson St	Newland St	4	AC	E	2	600	33	19,286	72	52	48	0	1/7/2026	Cold Mill and Overlay	2/1/2011
36	710	Arvilla Cir	Jefferson St	End	4	AAC	E	2	150	27	5,761	85	0	100	0	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
39	740	Ash St	Springdale St	Mahogany Ave	2	AC	E	2	792	32	25,180	61	65	35	0	12/2/2025	New Construction - Initial	1/1/1980
38	730	Ashbury Cir	End	End	6	AC	E	2	1,050	33	39,197	89	0	81	19	1/13/2026	Cold Mill and Overlay	10/20/2008
40	750	Ashford Ave	Sheffield St	Wakefield St	5	AAC	E	2	700	34	22,642	86	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
41	760	Ashley Cir	Calendula Ave	End	6	AC	E	2	450	33	18,754	78	9	91	0	1/13/2026	2" Conventional Overlay	3/25/2015
42	770	Ashmore Cir	Sowell Ave	End	2	AAC	E	2	177	32	7,521	75	7	56	37	1/13/2026	New Construction - Initial	1/1/1980
43	780	Aspenwood Ave	Newland	Wilson St	5	AAC	E	2	850	37	28,787	83	27	59	14	2/2/2026	Overlay - AC Structural	1/1/2019
44	790	Aster St	Calendula Ave	Jonquil Ave	6	AC	E	2	550	33	18,534	78	0	100	0	1/13/2026	2" Conventional Overlay	3/25/2015
45	800	Auburn Cir	Milan St	End	1	AC	E	2	313	33	12,136	86	45	20	35	12/1/2025	Surface Treatment - Slurry Seal	7/13/2011
46	810	Avon Cir	Nottingham Ave	End	6	AC	E	2	200	33	7,319	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
47	820	Azalea Wy	Obsidian Dr	South End	6	AC	E	2	250	27	10,007	73	0	100	0	2/2/2026	New Construction - Initial	1/1/1980
47	830	Azalea Wy	Larkspur Dr	Stoneridge Ave	6	AC	E	2	800	33	24,007	76	39	32	29	1/8/2026	New Construction - Initial	1/1/1980
48	840	Baker St	Vauxhall Rd	End	1	AC	E	2	1,007	35	33,936	88	17	83	0	11/25/2025	Cold Mill and Overlay	2/8/2010
48	850	Baker St	Vauxhall Rd	Victorio Pl	1	AC	E	2	1,408	35	46,993	91	26	73	1	11/25/2025	Cold Mill and Overlay	2/8/2010
49	860	Balboa St	Lido Ave	Thorpe Ave	5	AC	E	2	785	35	28,086	82	22	78	0	1/19/2026	Cold Mill and Overlay	10/20/2008
50	870	Ballou Cir	Fowler Cir	South End	6	AAC	E	2	100	25	6,565	80	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
51	880	Banbury Ave	Norwich Cir	End	6	AAC	E	2	850	36	32,158	80	0	97	3	1/27/2026	Overlay - AC Structural	6/26/2013
52	890	Bannock Rd	Seneca Dr	Klamath Dr	2	AC	E	2	843	33	29,985	75	36	64	0	12/16/2025	Cold Mill and Overlay	2/8/2010
52	900	Bannock Rd	Sioux Rd	Klamath Dr	2	AC	E	2	935	33	32,194	73	49	23	28	12/16/2025	New Construction - Initial	1/1/1980
52	910	Bannock Rd	Seneca Dr	Edwards St	2	AC	E	2	980	34	34,072	65	46	48	6	12/16/2025	New Construction - Initial	1/1/1980
53	920	Barber St	Harold Pl	Rancho Rd	1	AC	E	2	855	33	28,078	64	18	48	34	11/24/2025	New Construction - Initial	1/1/1980
54	940	Barker Cir	Rochelle Ave	End	2	AAC	E	2	215	33	9,073	99	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
55	950	Barney St	Meinhardt Rd	End	2	AC	E	2	1,410	33	46,915	93	0	100	0	12/15/2025	New Construction - Initial	1/1/1980
56	960	Barry Pl	Newland St	Tryon St	1	AC	E	2	450	33	15,546	64	53	34	13	1/5/2026	New Construction - Initial	1/1/1980
57	970	Baylor Dr	Hoover St	Webber Pl	4	AAC	E	2	1,027	33	35,089	76	19	25	56	1/14/2026	Surface Reconstruction - AC	7/23/2010
9250	14030	Beach Blvd WF	S End	End of County Road	3	AC	E	0	283	28	16,338	80	0	42	58	1/20/2026	New Construction - Initial	1/1/1990
59	990	Beechwood Cir	East End	Candlewood St	6	AAC	E	2	250	33	9,000	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
60	1000	Begonia St	Calendula Ave	Jonquil Ave	6	AC	E	2	660	36	22,677	68	18	82	0	1/13/2026	2" Conventional Overlay	3/25/2015
61	1010	Bel Air Cir	Pensacola St	End	5	AAC	E	2	400	33	15,195	82	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
58	980	Belford Ln	Oasis Ave	Reading Ave	4	AAC	E	2	270	33	8,638	89	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
62	1020	Belgrade St	Bishop Pl	McFadden Ave	6	AAC	E	2	1,300	40	48,412	67	26	74	0	1/12/2026	Overlay - AC Structural	6/12/2013
63	1030	Bellehurst Ave	Petsworth Ln	Golderns Green Ln	6	AC	E	2	1,140	37	43,658	76	20	56	24	1/28/2026	Cold Mill and Overlay	2/8/2010
64	1040	Belty Cir	Erin Rd	End	5	AAC	E	2	220	34	10,772	87	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
65	1050	Benchley Cir	Parkview Av	End	6	AAC	E	2	550	33	18,648	95	0	100	0	1/28/2026	Overlay - AC Structural	9/15/2023
66	1060	Benton Ave	Jasperson Wy	Hoover St	3	AC	E	2	1,155	37	39,610	83	11	89	0	1/2/2026	Cold Mill and Overlay	2/8/2010
67	1070	Berkeley Ave	Winthrop St	End	1	AC	E	2	557	32	20,078	51	84	16	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
67	1080	Berkeley Ave	University St	Winthrop St	1	AC	E	2	1,296	33	42,046	72	78	22	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
68	1090	Bermuda Ave	Fox Hills St	End	5	AAC	E	2	912	36	35,081	79	0	48	52	1/7/2026	Overlay - AC Structural	2/28/2022
69	1100	Bersuch St	Bestal Ave	Sutton St	2	AC	E	2	362	33	13,959	93	0	100	0	1/2/2026	Unknown Activity	5/15/2008
70	1110	Bestal Ave	Amarillo Dr	Jasperson Wy	3	AC	E	2	855	33	27,857	75	29	56	15	1/2/2026	New Construction - Initial	1/1/1980
70	1120	Bestal Ave	Siskiyou St	Goldenwest St	2	AC	E	2	1,179	33	39,991	75	57	40	3	1/2/2026	New Construction - Initial	1/1/1980
70	1130	Bestal Ave	Edwards St	Siskiyou St	2	AC	E	2	1,397	33	43,399	82	54	46	0	1/2/2026	New Construction - Initial	1/1/1980
70	1140	Bestal Ave	Chestnut St	Goldenwest St	3	AC	E	2	1,400	32	44,328	93	41	59	0	12/29/2025	Surface Treatment - Slurry Seal	7/13/2011
70	1141	Bestal Ave	Illinois St	End	3	AC	E	2	235	33	10,811	54	6	82	12	12/26/2025	New Construction - Initial	1/1/1980
71	1150	Bevan Ave	Poinsettia Wy	West End	6	AAC	E	2	525	33	19,378	90	0	100	0	1/14/2026	Surface Reconstruction - AC	11/26/2008
71	1151	Bevan Ave	Poinsettia Wy	East End	6	AAC	E	2	525	33	19,105	83	0	53	47	1/14/2026	Surface Reconstruction - AC	11/26/2008
72	1160	Beverly Ln	Hortense Dr	Irene Wy	6	AAC	E	2	600	33	19,890	88	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
73	1170	Bexley St	Shrewsbury Ave	Somerset St	1	AC	E	2	221	37	10,250	37	78	21	1	11/25/2025	New Construction - Initial	1/1/1980
75	1190	Bird Ave	Bushard St	Erin Rd	5	AC	E	2	530	34	17,653	84	36	60	4	1/27/2026	New Construction - Initial	1/1/1980
75	1195	Bird Ave	Erin Rd	Donegal Dr	5	AC	E	2	230	34	6,493	92	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
74	1180	Bird Cir	Moran St	End	5	AC	E	2	420	33	16,130	86	0	89	11	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
76	1200	Birmingham Dr	Churchill Av	End	1	AC	E	2	658	34	24,931	91	31	69	0	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
77	1205	Bishop Ave	Beach Blvd	Jackson St	3	AC	E	2	568	36	21,291	81	54	41	5	1/21/2026	New Construction - AC	1/1/1980
77	1210	Bishop Ave	Webster St	End	5	AC	E	2	500	33	17,600	91	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
77	1220	Bishop Ave	Purdy St	Neece St	5	AC	E	2	900	34	31,223	77	23	33	44	1/19/2026	New Construction - Initial	1/1/1980
78	1230	Bishop St	Swallow Ln	Bushard St	6	AC	C	2	800	32	26,701	42	92	8	0	2/19/2026	New Construction - Initial	1/1/1980
78	1240	Bishop St	Moran St	Bushard St	6	AC	C	2	1,200	36	43,332	89	21	79	0	2/19/2026	Cold Mill and Overlay	3/10/2011
78	1250	Bishop St	Magnolia St	Moran St	6	AC	C	2	1,400	36	58,468	81	17	83	0	2/19/2026	Unknown Activity	1/1/2008
78	1260	Bishop St	Brookhurst St	Swallow Ln	6	AC	C	2	1,723	32	64,488	62	57	43	0	1/12/2026	Cold Mill and Overlay	3/10/2011
79	1270	Blackheath Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,570	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
80	1280	Blackpool Rd	Suffolk St	Cavendish St	1	AC	E	2	716	30	20,448	90	21	79	0	11/25/2025	Cold Mill and Overlay	10/20/2008
80	1290	Blackpool Rd	Victoria Pl	Suffolk St	1	AC	E	2	1,189	28	32,689	89	0	52	48	11/25/2025	Cold Mill and Overlay	10/20/2008
85	10645	Bolsa Ave Frontage Rd	Alley 23	Purdy St	5	AC	E	2	960	29	26,197	54	20	37	43	1/19/2026	New Construction - Initial	1/1/1980
83	1410	Bolsa Chica Rd Frontage Rd	Hampton Ct	Vauxhall Rd	1	AC	E	2	420	25	11,273	81	0	58	42	11/25/2025	New Construction - Initial	1/1/1980
86	1480	Bonnema St	Jennrich Ave	Kern Ave	4	AAC	E	2	750	34	23,810	84	0	100	0	1/21/2026	Surface Reconstruction - AC	9/6/2011
87	1490	Boone Cir	Bowie St	End	5	AC	E	2	400	33	15,936	81	0	94	6	1/9/2026	Surface Treatment - Slurry Seal	4/28/2014
88	1500	Booney St	Stern Av	End	6	AAC	E	2	550	33	19,985	73	0	100	0	1/28/2026	Overlay - AC Structural	1/1/2019
89	1510	Bowen St	Mast Ave	Stern Ave	6	AAC	E	2	750	33	23,537	95	0	100	0	1/28/2026	Surface Reconstruction - AC	9/6/2011
90	1520	Bowie St	Cody Ave	Carnegie Ave	5	AC	E	2	845	33	32,382	79	23	54	23	1/9/2026	Cold Mill and Overlay	2/8/2010
91	1530	Bowling Green St	Hazard Ave	Parkview Ave	6	AC	E	2	750	33	26,607	70	24	76	0	1/27/2026	New Construction - Initial	1/1/1980
91	1540	Bowling Green St	Parkview Ave	Premier Ave	6	AC	E	2	1,300	36	43,509	74	14	86	0	1/27/2026	New Construction - Initial	1/1/1980
92	1560	Briarcliff St	Carnation Dr	Stoneridge Ave	6	AC	E	2	500	33	17,883	86	0	96	4	1/19/2026	New Construction - Initial	1/1/1980
93	1570	Brighton St	Melric Ave	Bolsa Ave	6	AC	E	2	800	35	28,150	70	34	43	23	1/22/2026	New Construction - Initial	1/1/1980
94	1580	Bristol Cir	Banbury Av	End	6	AAC	E	2	200	37	10,937	84	0	100	0	2/2/2026	Overlay - AC Structural	6/26/2013
95	1590	Brittany Cir	Colonial Dr	End	5	AAC	E	2	150	25	6,456	94	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
96	1600	Bromley St	Cheshire Ave	Newcastle Ave	5	AAC	E	2	600	32	17,917	71	20	80	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
97	1610	Brooke Ave	Nelson St	End	1	AC	E	2	1,800	36	67,793	72	12	88	0	1/5/2026	Cement Treated Base	9/30/2015
705	1680	Brookhurst St Frontage Rd	Banbury Ave	Margo Ln	6	AC	E	2	650	32	20,150	82	11	89	0	1/27/2026	New Construction - AC	1/1/1980
705	1685	Brookhurst St Frontage Rd	Margo Ln	N End	6	AC	E	2	401	26	10,126	79	21	53	26	1/27/2026	New Construction - AC	1/1/1980
99	1690	Brooklawn Dr	Hoover St	End	3	AC	E	2	600	33	20,807	81	48	52	0	1/5/2026	Surface Treatment - Slurry Seal	7/13/2011
99	1700	Brooklawn Dr	Iowa St	Chestnut St	3	AC	E	2	737	33	25,869	96	0	1	99	2/19/2026	New Construction - Initial	1/1/1980
100	1720	Bryant Cir	Milan St	End	1	AC	E	2	531	33	19,365	90	53	37	10	12/1/2025	Surface Treatment - Slurry Seal	7/13/2011
101	1730	Buckingham Cir	Anawood Wy	End	1	AC	E	2	403	33	14,827	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
102	1740	Bucknell Cir	Colgate Ave	End	3	AC	E	2	150	32	6,647	86	0	44	56	2/20/2026	New Construction - Initial	1/1/1980
103	1750	Burgess Cir	Orwell Ave	End	1	AC	E	2	400	33	13,568	90	0	56	44	1/5/2026	New Construction - AC	1/1/1980
104	1760	Burning Tree St	Palos Verde Ave	McFadden Ave	5	AC	E	2	1,150	36	39,211	89	19	56	25	1/7/2026	Cold Mill and Overlay	10/20/2008
105	1770	Busby Cir	Rochelle Ave	End	2	AAC	E	2	170	33	7,416	98	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
106	1780	Bush St	Westminster Ave	End	1	AAC	E	2	656	30	22,745	47	13	77	10	12/1/2025	Overlay - AC Structural	4/28/2014
108	1790	Butte St	McClure Ave	End	4	AAC	E	2	200	33	6,409	91	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
108	1800	Butte St	Sinclair Ave	Sabre Ln	5	AC	E	2	250	33	8,794	87	19	74	7	1/26/2026	Unknown Activity	2/28/2008
109	1810	Butterfield St	Cloverdale Ave	City Limit	6	AAC	E	2	1,150	36	40,601	82	11	87	2	1/12/2026	Overlay - AC Structural	6/26/2013
110	1840	Calendula Ave	Narcissus St	Dalewood Ln	6	AAC	E	2	550	36	20,396	76	7	93	0	1/13/2026	Surface Reconstruction - AC	11/26/2008
110	1850	Calendula Ave	Bushard St	Narcissus St	6	AAC	E	2	1,100	36	32,952	80	18	82	0	1/13/2026	Surface Reconstruction - AC	11/26/2008
111	1860	California Ave	Ida Wy	Willow Ln	2	AAC	E	2	289	33	9,723	98	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
111	1870	California Ave	Arizona St	Nevada St	4	AC	E	2	343	31	11,305	67	6	94	0	1/5/2026	New Construction - Initial	1/1/1980
112	1880	Caltech Cir	Oberline Av	End	5	AAC	E	2	350	36	13,602	95	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
113	1890	Cambridge Ave	Winthrop St	End	1	AC	E	2	562	32	20,499	44	89	11	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
113	1900	Cambridge Ave	University St	Winthrop St	1	AC	E	2	1,272	32	45,733	51	87	13	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
114	1910	Camelia Ln	Carnation Dr	Lotus Dr	6	AAC	E	2	544	33	19,692	97	0	100	0	1/20/2026	Overlay - AC Structural	2/28/2022
115	1920	Camphor Ln	Springdale St	Ebony Wy	2	AC	E	2	1,136	35	37,069	64	43	57	0	12/8/2025	New Construction - Initial	1/1/1980
115	1930	Camphor Ln	Springdale St	Wiltshire St	1	AAC	E	2	1,140	35	40,161	69	66	34	0	11/24/2025	Overlay - AC Structural	3/1/2012
1060	1940	Candlewood St	Cloverdale St	Westhaven St	6	AAC	E	2	1,070	36	37,901	86	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
116	1950	Canna Wy	Carnation Dr	Larkspur Dr	6	AC	E	2	1,350	33	44,463	81	24	40	36	1/8/2026	New Construction - Initial	1/1/1980
117	1960	Canterbury Cir	Nottingham Ave	End	6	AC	E	2	200	33	7,544	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
118	1970	Cardillo Dr	Leo St	Westminster Ave	4	AAC	E	2	488	34	16,894	85	17	80	3	1/6/2026	Overlay - AC Structural	5/22/2017
119	1980	Cardinal Ave	Bushard St	End	6	AAC	E	2	900	33	29,945	60	55	44	1	1/12/2026	Overlay - AC Structural	6/26/2013
120	1990	Carlton Ave	Maryknoll St	Vermont St	3	AC	E	2	875	38	32,937	76	42	54	4	12/10/2025	Unknown Activity	6/14/2010
121	2000	Carmel Cir	Eden St	End	5	AAC	E	2	450	33	15,372	82	0	100	0	1/7/2026	Overlay - AC Structural	12/30/2013
122	2010	Carnation Dr	Highcliff St	Briarcliff St	6	AC	E	2	950	33	34,852	82	21	56	23	1/8/2026	New Construction - Initial	1/1/1980
122	2020	Carnation Dr	Camelia Ln	Briarcliff St	6	AC	E	2	1,250	33	42,566	83	70	30	0	1/8/2026	New Construction - Initial	1/1/1980
123	2025	Carnegie Ave	Newland St	Bowie St	5	AC	E	2	196	36	5,605	86	0	96	4	1/9/2026	New Construction - AC	1/1/1980
123	2030	Carnegie Ave	Newland St	Redlands St	5	AAC	E	2	1,150	37	52,764	95	0	91	9	1/9/2026	Overlay - AC Structural	1/1/2020
124	2040	Cascade St	Mahogany Ave	End	2	AC	E	2	184	33	5,820	83	3	78	19	12/8/2025	New Construction - Initial	1/1/1980
124	2050	Cascade St	Camphor Ave	City Limits	2	AAC	E	2	662	33	20,004	84	22	78	0	12/8/2025	Overlay - AC Structural	1/1/2019
125	2060	Castle St	Salem Ave	Hazard Ave	4	AAC	E	2	600	33	18,033	83	16	84	0	1/21/2026	Surface Reconstruction - AC	9/6/2011
126	2080	Cavendish St	Blackpool Rd	Kingcross Rd	1	AC	E	2	350	20	6,807	89	32	68	0	11/25/2025	Cold Mill and Overlay	10/20/2008
127	2090	Cayuga Dr	Navajo Rd	Kiowa Rd	2	AC	E	2	843	33	28,406	68	62	38	0	12/16/2025	Cold Mill and Overlay	2/8/2010
128	2100	Cedar St	21st St	Westminster Ave	3	AAC	E	2	1,232	32	42,111	86	30	42	28	2/19/2026	Surface Reconstruction - AC	9/6/2011
128	2110	Cedar St	Bestel Ave	Natal Dr	3	AAC	E	2	1,234	34	41,011	78	46	39	15	1/2/2026	Overlay - AC Structural	1/1/2019
129	14060	Cedarwood Ave	Sugar Dr	End	3	AC	E	0	1,309	33	41,113	84	27	55	18	1/20/2026	New Construction - Initial	1/1/1990
129	2120	Cedarwood Ave	13th St	Hazard Ave	4	AC	E	2	1,234	33	40,490	70	41	47	12	1/14/2026	New Construction - Initial	1/1/1980
129	2130	Cedarwood Ave	13th St	Westminster Ave	4	AC	E	2	1,298	33	43,213	74	40	49	11	1/14/2026	New Construction - Initial	1/1/1980
130	2140	Centerstone Ct	Hammon Pl	Centerstone Ct	1	AC	E	2	1,314	31	38,836	81	35	65	0	11/24/2025	New Construction - Initial	1/1/1980
131	2150	Champion Ave	Yarborough St	End	5	AC	E	2	455	32	16,588	95	0	100	0	1/26/2026	2" Conventional Overlay	11/2/2015
132	2160	Channing Ave	Yarborough St	Magnolia St	5	AC	E	2	450	36	17,317	95	0	100	0	1/26/2026	2" Conventional Overlay	11/2/2015
133	2170	Charing Cross Rd	Victorio Pl	Suffolk St	1	AAC	E	2	622	30	18,851	89	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
134	2180	Charleville Dr	23rd St	21st St	4	AAC	E	2	635	31	20,353	74	9	91	0	1/6/2026	Overlay - AC Structural	1/30/2014
134	2190	Charleville Dr	21st St	19th St	4	AAC	E	2	634	31	20,398	69	14	86	0	1/6/2026	Overlay - AC Structural	1/30/2014
135	2200	Chaucer Cir	Channing Ave	End	5	AC	E	2	120	27	5,829	94	0	62	38	1/26/2026	2" Conventional Overlay	11/2/2015
136	2210	Chelsea Cir	Oakcliff Dr	End	6	AC	E	2	400	33	15,052	81	18	69	13	1/14/2026	Cold Mill and Overlay	2/1/2010
137	2220	Cherokee Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	838	34	27,937	79	8	87	5	12/16/2025	New Construction - Initial	1/1/1980
138	2230	Cherry St	Natal Dr	Bestel Ave	3	AC	E	2	1,117	34	37,386	77	11	89	0	1/2/2026	Unknown Activity	8/30/2008
138	2240	Cherry St	21st St	Westminster Ave	3	AC	E	2	1,233	36	44,400	98	0	76	24	1/6/2026	Surface Treatment - Slurry Seal	7/13/2011
139	2250	Cheshire Ave	Wakefield St	Bromley St	5	AAC	E	2	950	34	33,048	85	25	75	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
140	2260	Chestnut St	Hazard Ave	Maple St	3	AC	C	2	582	53	30,378	71	84	16	0	1/13/2026	New Construction - Initial	1/1/1980
140	2270	Chestnut St	Maple St	Main St	3	AC	C	2	665	56	33,444	57	7	36	57	1/13/2026	New Construction - Initial	1/1/1980
140	2275	Chestnut St	Main St	Park St	3	AC	C	2	475	53	18,665	87	21	79	0	1/13/2026	Unknown Activity	1/1/2008
140	2280	Chestnut St	Santee Ave	Fenwick Ln	3	AC	C	2	1,252	45	58,484	75	64	32	4	1/14/2026	New Construction - Initial	1/1/1980
140	2290	Chestnut St	Santee Ave	Hazard Ave	3	AC	C	2	545	45	22,906	70	80	20	0	1/14/2026	New Construction - Initial	1/1/1980
140	2300	Chestnut St	Fenwick Ln	Bolsa Ave	3	AC	C	2	682	42	28,995	100	0	0	0	1/14/2026	New Construction - Initial	1/1/1980
140	2310	Chestnut St	Trask Ave	21st St	3	AC	E	2	1,242	33	41,764	86	0	70	30	12/26/2025	New Construction - Initial	1/1/1980
140	2320	Chestnut St	Trask Ave	Natal Dr	3	AC	E	2	1,672	33	54,715	99	0	51	49	12/26/2025	New Construction - Initial	1/1/1980
140	90059	Chestnut St	Plaza St	Westminster Blvd	3	AC	C	2	470	43	14,120	81	28	65	7	1/13/2026	New Construction - Initial	1/1/1980
141	2330	Cheyenne Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	832	34	29,058	66	71	29	0	12/16/2025	New Construction - Initial	1/1/1980
142	2340	Chickasaw Dr	Navajo Rd	Iroquois Rd	2	AC	E	2	1,127	33	37,045	63	58	42	0	12/16/2025	New Construction - Initial	1/1/1980
143	2360	Chinook Ave	Willow Ln	Springdale St	2	AAC	E	2	1,591	33	51,504	78	58	37	5	12/2/2025	Overlay - AC Structural	1/1/2019
144	2370	Chippewa Dr	Sioux Rd	Navajo Rd	2	AC	E	2	1,239	33	47,576	73	46	49	5	12/16/2025	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
145	2380	Choctaw Dr	Navajo Rd	Iroquois Rd	2	AC	E	2	1,270	33	42,316	48	45	55	0	12/16/2025	New Construction - Initial	1/1/1980
146	2390	Church St	Plaza St	Park St	3	AC	E	2	320	54	16,976	88	14	86	0	1/13/2026	New Construction - Initial	1/1/1980
147	2400	Churchill Ave	Bolsa Chica Rd	End	1	AC	E	2	770	37	30,239	68	51	47	2	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
148	2410	Citadel Cir	Clemson St	End	3	AC	E	2	137	32	8,190	61	64	36	0	2/20/2026	New Construction - Initial	1/1/1980
149	2420	Clare Cir	Stinson Ln	End	6	AC	E	2	100	32	5,226	79	0	100	0	2/2/2026	New Construction - Initial	1/1/1980
150	2430	Claremont St	Yale Ave	Purdue Ave	1	AC	E	2	920	33	34,067	61	74	26	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
1054	2440	Clarendon St	Cloverdale Av	City Limit	6	AAC	E	2	1,000	36	31,843	88	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
151	2450	Clark Cir	Milan st	End	1	AC	E	2	749	33	25,665	91	0	68	32	12/1/2025	Surface Treatment - Slurry Seal	7/13/2011
152	2460	Clemente St	Natoma Ave	Whitley St	5	AAC	E	2	1,000	35	30,923	100	0	0	0	1/14/2026	Overlay - AC Structural	7/30/2023
153	2470	Clemson St	Colgate Ave	Citadel Cir	3	AC	E	2	426	32	14,061	75	77	14	9	2/20/2026	New Construction - Initial	1/1/1980
154	2480	Cloverdale Ave	Grey Oaks St	End	6	AAC	E	2	1,286	36	45,948	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
155	2500	Cody Ave	Ord Wy	Bowie St	5	AC	E	2	300	33	12,826	83	40	60	0	2/2/2026	Cold Mill and Overlay	2/8/2010
1059	90067	Colby Cir	Vermont St	End	3	AAC	E	2	135	34	6,595	80	30	70	0	12/10/2025	Overlay - AC Structural	1/1/2020
156	2510	Colchester Ave	Yarborough St	End	5	AC	E	2	450	32	16,705	93	0	93	7	1/26/2026	2" Conventional Overlay	11/2/2015
157	2520	Colgate Ave	Clemson St	Xavier Cir	3	AC	E	2	787	33	28,060	73	61	39	0	1/20/2026	New Construction - Initial	1/1/1980
157	2530	Colgate Ave	Temple St	Clemson St	3	AAC	E	2	930	36	33,752	75	41	58	1	1/20/2026	Overlay - AC Structural	3/1/2012
157	2535	Colgate Ave	Temple St	W End	3	AC	E	2	333	36	12,695	84	67	33	0	1/20/2026	New Construction - AC	1/1/1980
158	2540	College St	Westminster Ave	Somerset St	1	AC	E	2	270	47	11,538	43	69	31	0	11/25/2025	New Construction - Initial	1/1/1980
158	2550	College St	Westminster Ave	Harvard Ave	1	AC	E	2	586	33	18,302	50	82	18	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
159	2560	Colleta Pl	Greenville Ave	Sinclair Ave	5	AC	E	2	1,150	33	38,827	69	34	62	4	1/26/2026	New Construction - Initial	1/1/1980
160	2580	Colonial Dr	Hazard Ave	Williamsburg Ave	5	AAC	E	2	530	33	16,929	91	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
161	2590	Comanche Dr	Sioux Rd	Modoc Dr	2	AC	E	2	762	33	24,999	78	36	64	0	12/16/2025	New Construction - Initial	1/1/1980
162	2600	Comet Cir	Galaxy Dr	End	1	AC	E	2	500	33	18,481	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
164	2620	Commonwealth Pl	Ambassador Dr	Edinger Ave	6	AC	E	2	450	36	20,071	72	56	43	1	1/8/2026	2" Conventional Overlay	4/21/2016
165	2630	Concordia Pl	Syracuse St	End	3	AAC	E	2	453	33	16,672	82	19	59	22	1/20/2026	Overlay - AC Structural	6/26/2013
166	2640	Condon Cir	Duke	End	6	AAC	E	2	250	33	10,002	85	0	96	4	1/12/2026	Overlay - AC Structural	6/26/2013
167	2650	Conner Cir	Wilson St	End	4	AC	E	2	350	27	14,385	75	19	81	0	1/6/2026	Cold Mill and Overlay	2/1/2011
168	2660	Connie Wy	Margo Ln	Northampton Ave	6	AAC	E	2	200	36	7,927	83	36	49	15	1/27/2026	Overlay - AC Structural	6/26/2013
169	2670	Cordaway Ave	Maybrook St	Plumwood St	5	AC	E	2	250	33	7,123	90	0	100	0	2/2/2026	Unknown Activity	4/1/2009
170	2690	Cornell Ave	Winthrop St	End	1	AC	E	2	564	33	19,461	76	65	35	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
170	2700	Cornell Ave	University St	Winthrop St	1	AC	E	2	1,280	33	42,238	80	83	15	2	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
171	2710	Cornwall Ave	Wakefield St	Bromley St	5	AAC	E	2	1,050	33	33,689	51	42	58	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
172	2720	Coronado St	Whitley St	Lido Ave	5	AC	E	2	1,203	35	42,446	100	0	0	0	1/14/2026	Unknown Activity	4/1/2009
173	2730	Coronet Ave	West End	East End	6	AAC	E	2	1,600	33	64,092	68	21	49	30	1/13/2026	Surface Reconstruction - AC	11/26/2008
174	2740	Crockett Cir	Bowie St	End	5	AC	E	2	400	33	14,241	82	11	74	15	1/9/2026	Surface Treatment - Slurry Seal	4/28/2014
175	2750	Cromwell Cir	Duke Dr	End	6	AAC	E	2	350	33	12,085	80	0	98	2	1/12/2026	Overlay - AC Structural	6/26/2013
176	2760	Crown Ct	Monroe St	End	5	AC	E	2	450	32	19,240	75	35	65	0	1/21/2026	Unknown Activity	6/14/2010
177	2770	Cumberland Ave	Anawood Wy	Danvers Wy	1	AC	E	2	645	33	22,036	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
178	2780	Cunningham Ave	Pickford St	Brookhurst St	6	AAC	C	2	1,254	36	48,634	100	0	0	0	1/21/2026	Overlay - AC Structural	2/1/2010
178	2790	Cunningham Ave	Ward St	Pickford St	6	AC	E	2	1,445	36	52,952	97	0	0	100	1/21/2026	Cold Mill and Overlay	2/8/2010
179	2800	Cynthia Dr	Springdale St	Pamela Ln	2	AC	E	2	142	37	6,068	80	59	41	0	12/16/2025	2" Conventional Overlay	3/25/2015
180	2810	Dalewood Ln	Calendula Ave	McFadden Ave	6	AAC	E	2	295	36	12,095	70	34	65	1	1/13/2026	Surface Reconstruction - AC	11/26/2008
181	2820	Dalton Cir	Oakcliff Dr	W End	6	AC	E	2	286	33	11,036	72	35	50	15	1/14/2026	Cold Mill and Overlay	2/1/2010
181	2825	Dalton Cir	Oakcliff Dr	E End	6	AC	E	2	115	32	5,701	58	56	44	0	1/14/2026	New Construction - AC	1/1/1980
182	2830	Dana Cir	Heil Ave	End	1	AC	E	2	850	33	28,366	67	49	51	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
183	2840	Danborough St	Melric Ave	Cunningham Ave	6	AC	E	2	750	35	23,454	96	72	0	28	1/21/2026	New Construction - Initial	1/1/1980
184	2850	Danvers Wy	Cumberland Ave	Weymouth Wy	1	AC	E	2	807	33	29,845	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
185	2860	Dartmouth Ave	Winthrop St	End	1	AC	E	2	567	33	19,378	73	70	30	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
185	2870	Dartmouth Ave	Fordham St	Winthrop St	1	AC	E	2	1,054	33	35,653	81	54	46	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
9300	14070	Darwin Ave	Cedarwood Ave	Pacific St	3	AC	E	0	610	33	18,940	88	40	52	8	1/20/2026	New Construction - Initial	1/1/1990
186	2880	Davis St	Sowell Ave	Santee Ave	3	AAC	E	2	582	33	20,999	73	32	68	0	1/13/2026	Overlay - AC Structural	6/12/2013
187	2890	Day Pl	Bestel Ave	End	2	AC	E	2	174	33	6,787	93	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
188	2900	De Paul St	Emerson Ave	Sienna Ave	3	AC	E	2	238	33	10,858	65	65	35	0	12/10/2025	New Construction - Initial	1/1/1980
189	2910	Deanann Pl	Stern Ave	South End	6	AAC	E	2	320	33	13,018	72	0	100	0	1/28/2026	Overlay - AC Structural	1/1/2019
189	2920	Deanann Pl	Stern Av	North End	6	AAC	E	2	550	33	19,615	65	24	76	0	1/28/2026	Overlay - AC Structural	1/1/2019
190	2940	Delray Cir	Pensacola St	End	5	AAC	E	2	400	33	15,493	81	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
191	2950	Denise Dr	Homer St	End	2	AC	E	2	493	33	16,355	67	75	25	0	12/17/2025	Cold Mill and Overlay	3/17/2011
192	2960	Descanso Dr	Trask Ave	24th St	4	AAC	E	2	471	34	16,250	86	20	80	0	1/5/2026	Overlay - AC Structural	1/1/2020
193	2970	Devilwood Cir	Wilson St	End	5	AAC	E	2	350	38	13,688	81	12	88	0	1/9/2026	Overlay - AC Structural	1/1/2019
194	2980	Devonshire Cir	Nottingham Ave	End	6	AC	E	2	200	33	7,078	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010

**City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets**

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
195	2990	Dia Ave	Purdy St	Shirley St	4	AAC	E	2	550	33	17,843	92	27	73	0	1/20/2026	Surface Reconstruction - AC	12/24/2010
196	3000	Diamond St	Emerald Ave	Sapphire Ave	5	AC	E	2	950	33	32,496	75	0	34	66	1/7/2026	New Construction - Initial	1/1/1980
197	3010	Dickens Cir	Oakcliff Dr	End	6	AC	E	2	400	33	16,348	81	16	74	10	1/14/2026	Cold Mill and Overlay	2/1/2010
198	3020	Dillow St	Bolsa Ave	Kramer Ave	5	AC	E	2	777	37	27,614	57	66	34	0	1/27/2026	New Construction - Initial	1/1/1980
199	3030	Dogwood St	Aspenwood Ave	Torchwood Cir	5	AAC	E	2	1,100	33	40,033	90	0	70	30	1/9/2026	Overlay - AC Structural	1/1/2020
200	3040	Donegal Dr	Sabre Ave	City Limit	5	AC	E	2	405	34	14,334	91	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
201	3070	Dorfsmith Dr	Iroquois Rd	Abbey Dr	2	AC	E	2	336	33	12,663	71	14	86	0	12/15/2025	New Construction - Initial	1/1/1980
202	3050	Dorothy Dr	Lee Dr	Melanie Ln	2	AC	E	2	1,146	33	38,819	82	47	43	10	12/16/2025	New Construction - Initial	1/1/1980
203	3060	Dorsey Cir	Iroquois Rd	End	2	AC	E	2	138	31	6,337	84	0	100	0	12/15/2025	New Construction - Initial	1/1/1980
204	3080	Dover Cir	Queenborough St	End	6	AC	E	2	200	32	8,663	100	0	0	0	1/21/2026	New Construction - Initial	1/1/1980
205	3090	Downing Cir	End	End	6	AC	E	2	1,050	33	38,622	86	30	53	17	1/13/2026	Cold Mill and Overlay	10/20/2008
206	3100	Drey Rd	Dana Cir	Jody Cir	1	AC	E	2	550	33	19,107	54	81	19	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
207	3110	Duke Dr	Grey Oaks St	Empire Ln	6	AAC	E	2	1,100	36	39,468	87	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
208	3120	Dumont Ln	Homer St	Wee Wy	2	AC	E	2	344	34	13,292	82	0	100	0	12/17/2025	Cold Mill and Overlay	3/17/2011
209	3130	Duncannon Ave	Bolsa Chica Rd	Weymouth Wy	1	AC	E	2	1,081	60	70,935	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
209	3140	Duncannon Ave	Weymouth Wy	Milan St	1	AC	E	2	1,466	37	56,025	100	0	0	0	4/28/2026	Overlay - AC Structural	6/14/2010
210	3150	Duquesne Pl	Syracuse St	End	3	AC	E	2	460	33	16,230	85	25	63	12	1/20/2026	New Construction - Initial	1/1/1980
211	3170	Earl Cir	Duke Dr	End	6	AAC	E	2	120	33	5,951	82	0	95	5	1/12/2026	Overlay - AC Structural	6/26/2013
1056	90063	East Dr	Bolsa Av	Mall	2	AC	E	4	220	58	6,761	85	54	46	0	12/9/2025	New Construction - Initial	1/1/1980
212	3180	Ebony Wy	Camphor Ave	Mahogany Ave	2	AC	E	2	252	33	10,600	70	7	93	0	12/8/2025	New Construction - Initial	1/1/1980
213	3190	Ed Bane Cir	Lunar St	End	1	AC	E	2	200	32	7,873	71	27	58	15	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
214	3200	Eden St	Natoma Ave	Montrose Ave	5	AC	E	2	300	33	8,955	98	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
214	3210	Eden St	Mcfadden Ave	St Andrews Ave	5	AAC	E	2	885	33	31,140	82	0	70	30	1/7/2026	Overlay - AC Structural	12/30/2013
214	3215	Eden St	Thorpe Ave	Mcfadden Ave	5	AAC	E	2	240	33	8,108	85	35	56	9	2/2/2026	Overlay - AC Structural	12/30/2013
214	90060	Eden St	Elvira Av	Bolsa Av Frontage Rd	5	AAC	E	2	760	35	23,788	97	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
215	3220	Edgemont Cir	Fox Hills St	End	5	AAC	E	2	250	33	10,028	85	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
216	3230	Edinburgh Dr	Cumberland Ave	Hampshire Ave	1	AC	E	2	916	33	32,750	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
218	3280	Edita Ave	Hammon Pl	Milan Ave	1	AC	E	2	1,117	33	37,429	86	0	100	0	12/1/2025	New Construction - Initial	1/1/1980
219	3290	Edwards St	Edwards St	Maple Ave	2	AC	E	2	580	40	26,003	57	17	40	43	12/9/2025	Unknown Activity	5/15/2008
220	3410	Elvira Ave	Hunter Ln	Coronado St	5	AC	E	2	600	33	20,162	99	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
220	3420	Elvira Ave	Hunter Ln	End	5	AC	E	2	1,400	35	48,404	97	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
221	3390	Elystan Cir	Ixworth Pl	End	1	AC	E	2	390	30	13,736	88	0	75	25	11/25/2025	Cold Mill and Overlay	10/20/2008
222	3430	Emerado Cir	Jefferson St	End	4	AAC	E	2	150	27	5,835	84	0	89	11	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
223	3440	Emerado Pl	Harper St	End	4	AC	E	2	300	33	10,579	80	14	86	0	1/7/2026	Surface Treatment - Slurry Seal	4/28/2014
224	3450	Emerald Ave	Maybrook St	Plumwood St	5	AC	E	2	250	33	10,283	84	0	100	0	2/2/2026	Unknown Activity	4/1/2009
224	3460	Emerald Ave	Quartz St	Magnolia St	5	AC	E	2	1,150	33	36,503	73	47	49	4	1/7/2026	New Construction - Initial	1/1/1980
225	3470	Emerson Ave	Vassar St	De Paul St	3	AC	E	2	783	33	25,830	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
226	3480	Empire Ln	Duke Dr	Westwood Dr	6	AAC	E	2	200	36	9,295	88	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
227	3490	Encinas Cir	Richardson Wy	End	4	AAC	E	2	218	33	9,739	90	0	100	0	1/5/2026	Overlay - AC Structural	1/1/2020
228	3500	Enfield Cir	Horsham Ave	End	1	AC	E	2	694	37	28,190	51	86	14	0	11/25/2025	New Construction - Initial	1/1/1980
229	3510	England Ave	Bushard St	End	6	AC	E	2	1,200	36	42,115	89	31	21	48	1/13/2026	Cold Mill and Overlay	10/20/2008
230	3520	Erie Pl	Sioux Rd	End	2	AC	E	2	193	33	8,305	66	30	38	32	12/15/2025	Unknown Activity	1/1/2007
231	3530	Erin Rd	Bird Av	North End	5	AAC	E	2	420	34	15,578	91	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
231	90058	Erin Rd	Bird Av	Belty Cir	5	AAC	E	2	240	34	8,729	89	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
232	3540	Essex Cir	Melric Ave	End	6	AC	E	2	400	30	15,319	68	39	48	13	1/22/2026	New Construction - Initial	1/1/1980
233	3550	Estes Cir	Hood Dr	End	2	AC	E	2	521	33	20,155	92	0	100	0	12/17/2025	Cold Mill and Overlay	10/20/2008
234	3560	Evans Cir	Wheeler Ave	End	2	AC	E	2	135	33	6,586	80	0	41	59	12/17/2025	Cold Mill and Overlay	10/20/2008
235	3570	Exeter St	Northampton Ave	Banbury Ave	6	AAC	E	2	360	33	15,057	74	6	68	26	1/27/2026	Overlay - AC Structural	6/26/2013
236	3580	Fairmont Cir	Fox Hills St	End	5	AAC	E	2	250	33	9,662	84	0	54	46	1/7/2026	Overlay - AC Structural	2/28/2022
237	3590	Feltham Cir	Orwell Ave	End	1	AC	E	2	500	36	17,434	88	0	40	60	1/5/2026	New Construction - Initial	1/1/1980
238	10750	Fenway Dr	Goldenwest St	End	3	AAC	E	2	1,240	32	50,089	89	0	12	88	1/2/2026	Overlay - AC Structural	9/15/2023
239	3600	Fenwick Ln	Chestnut St	End	3	AC	E	2	567	34	24,636	81	16	71	13	1/14/2026	Unknown Activity	1/1/2007
240	3620	Finchley Ave	Petsworth Ln	Golders Green Ln	6	AC	E	2	1,140	37	41,801	83	0	100	0	1/28/2026	Cold Mill and Overlay	2/8/2010
241	3630	Fleming St	Bolsa Ave	Tennysen Ave	6	AAC	E	2	450	33	18,117	65	19	77	4	1/22/2026	Overlay - AC Structural	6/12/2013
9350	14080	Flight Ave	Van Buren St	End	5	AC	E	0	192	33	8,550	89	0	77	23	1/21/2026	New Construction - Initial	1/1/1990
9350	14090	Flight Ave	Monroe St	Wilson St	5	AC	E	0	565	33	16,834	89	34	32	34	1/9/2026	New Construction - Initial	1/1/1990
242	3640	Florence Ave	Ward St	Las Solanas St	6	AAC	E	2	360	35	10,789	88	19	81	0	2/2/2026	Surface Reconstruction - AC	9/6/2011
243	3650	Fordham St	Cornell Ave	Darhmouth Ave	1	AC	E	2	183	33	8,500	84	57	43	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
244	3660	Forrest Ln	Parkview Ave	Premier Ave	6	AC	E	2	1,300	33	48,223	80	8	84	8	1/27/2026	New Construction - Initial	1/1/1980
245	3670	Fowler Cir	Brookhurst St	End	6	AAC	E	2	600	33	22,379	94	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
246	3680	Fox Hills St	Bermuda Ave	Palos Verde Ave	5	AAC	E	2	900	36	32,767	87	0	84	16	1/7/2026	Overlay - AC Structural	2/28/2022
247	3690	Francis St	Harold Pl	Rancho Rd	1	AC	E	2	1,126	33	36,131	68	48	38	14	11/24/2025	New Construction - Initial	1/1/1980
248	3700	Franklin Cir	Duncannon Ave	North End	1	AC	E	2	455	33	16,645	77	19	59	22	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
248	3710	Franklin Cir	Duncannon Ave	South End	1	AC	E	2	562	33	20,091	73	31	67	2	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
249	3720	Furman Ave	Redlands St	End	5	AAC	E	2	1,100	36	30,079	94	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
250	3740	Galaxy Dr	Heil Ave	Universe Ave	1	AC	E	2	1,200	33	35,697	62	54	46	0	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
251	3750	Galway St	Hazard Ave	Bird Ln	5	AAC	E	2	550	34	17,380	90	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
253	10245	Garden Grove Blvd (Frontage Rd)	Williamette St	La Pata St	2	AAC	E	2	550	30	18,081	57	58	41	1	1/2/2026	Overlay - AC Structural	1/1/2019
254	3840	Garland Cir	Cloverdale Ave	End	6	AAC	E	2	170	36	6,799	84	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
255	3850	Garnet St	Emerald Ave	Sapphire Ave	5	AC	E	2	1,000	33	31,586	68	55	44	1	1/7/2026	New Construction - Initial	1/1/1980
256	3860	Garo Pl	Harper St	End	4	AC	E	2	300	33	10,625	74	48	45	7	1/7/2026	Surface Treatment - Slurry Seal	4/28/2014
257	3870	Gary St	Kathy St	End	3	AAC	E	2	115	34	3,366	93	0	100	0	1/13/2026	Overlay - AC Structural	6/12/2013
258	3880	Georgetown Ave	Goldenwest St	Lafayette St	3	AC	E	2	349	36	13,092	49	56	25	19	12/9/2025	New Construction - Initial	1/1/1980
259	3890	Gillingham Cir	Southfield Dr	End	1	AC	E	2	400	34	14,603	80	33	52	15	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
260	3900	Ginger Ln	La Pat Pl	Nancy Lee Dr	2	AC	E	2	791	33	28,512	81	14	86	0	12/17/2025	Cold Mill and Overlay	3/17/2011
261	3910	Givens Pl	Sinclair Ave	Washington Ave	5	AC	E	2	840	33	29,431	80	45	55	0	1/26/2026	Unknown Activity	1/1/2007
262	3920	Glacier Dr	Jon Wy	Ida Wy	2	AAC	E	2	1,004	33	35,161	80	21	79	0	12/8/2025	Overlay - AC Structural	1/1/2019
263	6990	Gleneagles Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,111	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
264	3930	Glenridge Ave	Briarcliff St	Highcliff St	6	AC	E	2	1,000	33	32,547	84	13	65	22	1/8/2026	New Construction - Initial	1/1/1980
265	3940	Glitter St	Oasis Ave	End	4	AC	E	2	820	36	29,411	84	14	70	16	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
266	3950	Gloucester Cir	Wiltshire St	End	1	AAC	E	2	486	33	18,076	70	47	40	13	11/24/2025	Overlay - AC Structural	3/1/2012
267	3960	Goebel Ln	Reading Ave	End	4	AAC	E	2	120	34	5,655	81	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
268	3970	Goldenwest Cir	Bolsa Ave	Bolsa Ave	3	AC	E	2	1,642	45	77,923	62	78	13	9	1/20/2026	Surface Treatment - Slurry Seal	7/13/2011
270	4070	Golders Green Ln	Bellehurst Ave	Parkview Ave	6	AC	E	2	500	37	20,554	74	18	82	0	1/28/2026	New Construction - Initial	1/1/1980
271	4080	Gonzaga Pl	Syracuse St	End	3	AAC	E	2	452	33	16,308	86	0	100	0	1/21/2026	Overlay - AC Structural	6/26/2013
272	4090	Graham St	Harold Pl	Rancho Rd	1	AC	E	2	320	37	14,426	68	25	42	33	11/24/2025	New Construction - Initial	1/1/1980
273	4100	Grambling Cir	Northwestern Wy	End	1	AC	E	2	235	30	10,043	91	0	53	47	11/19/2025	Unknown Activity	8/30/2008
274	4120	Greasewood Cir	Dogwood St	End	5	AAC	E	2	500	36	17,122	92	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
275	4130	Green Fern Cir	Bowling Green St	End	6	AC	E	2	360	34	13,274	73	7	93	0	1/27/2026	Cold Mill and Overlay	2/8/2010
276	4140	Greenville Ave	Alcester St	Magnolia St	5	AC	E	2	900	33	30,075	66	62	23	15	1/26/2026	New Construction - Initial	1/1/1980
277	4150	Gretchen Ln	Irene Wy	Patrice Ave	6	AAC	E	2	752	33	25,784	91	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
278	4160	Grey Oaks St	Duke Dr	Westwood Dr	6	AAC	E	2	535	36	20,284	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
279	4170	Grinnel Cir	Duncannon Ave	End	1	AC	E	2	327	33	12,840	72	31	46	23	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
280	4190	Gulino Cir	Allen St	End	3	AAC	E	2	125	30	5,646	79	10	88	2	1/13/2026	Overlay - AC Structural	6/12/2013
281	4200	Gumwood Cir	Wilson St	End	5	AAC	E	2	350	38	13,685	82	0	76	24	1/9/2026	Overlay - AC Structural	1/1/2019
282	4220	Halifax Ave	Ward St	Brighton St	6	AC	E	2	380	35	11,433	68	19	76	5	1/22/2026	New Construction - Initial	1/1/1980
283	4230	Hammon Pl	Westminster Ave	Rochelle Ave	1	AC	E	2	814	34	28,628	63	46	26	28	12/1/2025	New Construction - Initial	1/1/1980
283	4240	Hammon Pl	Rochelle Ave	Vallecito Dr	1	AC	C	2	1,031	34	33,402	82	27	61	12	12/1/2025	New Construction - Initial	1/1/1980
283	4250	Hammon Pl	Westminster Ave	Harold Pl (City Limit)	1	AAC	C	2	1,234	40	50,800	100	0	100	0	11/24/2025	Overlay - AC Structural	2/28/2022
284	4270	Hampshire Ave	Weymouth Wy	Edinburgh Dr	1	AC	E	2	380	33	12,680	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
285	4260	Hampton Ct	Bolsa Chica Rd	Baker St	1	AC	E	2	930	30	27,043	88	0	96	4	11/25/2025	Cold Mill and Overlay	2/18/2010
9400	14100	Harhay Ave	Cedarwood Ave	End	3	AC	E	0	733	33	26,272	80	11	38	51	1/20/2026	New Construction - Initial	1/1/1990
286	4280	Harold Pl	Graham St	Hammon Pl	1	AAC	E	2	1,294	36	48,660	73	17	83	0	11/24/2025	Surface Reconstruction - AC	4/1/2009
287	4290	Harper St	Satinwood Cir	Bolsa Ave	5	AAC	E	2	150	36	5,397	78	0	100	0	2/2/2026	Overlay - AC Structural	1/1/2019
287	4300	Harper St	Lomay Ave	23rd St	4	AC	E	2	1,600	33	50,060	88	17	71	12	1/7/2026	Cold Mill and Overlay	2/1/2010
288	4310	Hartford Wy	College St	Yankton Wy	1	AC	E	2	331	33	11,663	85	15	85	0	11/19/2025	Unknown Activity	8/30/2008
288	4320	Hartford Wy	College St	End	1	AC	E	2	361	33	13,881	81	51	41	8	11/19/2025	Unknown Activity	8/30/2008
289	4330	Harvard Ave	Winthrop St	End	1	AC	E	2	617	33	20,909	57	84	16	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
289	4340	Harvard Ave	University St	Winthrop St	1	AC	E	2	1,259	33	45,216	65	73	27	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
290	4360	Hazard Ave	Goldenwest St	End	2	AC	E	2	1,474	27	50,413	77	42	58	0	1/13/2026	New Construction - Initial	1/1/1980
291	4410	Hazelwood Cir	Tungwood St	End	5	AAC	E	2	600	36	20,144	82	12	88	0	1/9/2026	Overlay - AC Structural	1/1/2019
292	4420	Heather Ct	Forrest Ln	End	6	AC	E	2	90	30	5,316	68	10	90	0	1/28/2026	New Construction - Initial	1/1/1980
293	4430	Hefley St	Sioux Rd	Milton Ave	2	AC	E	2	1,257	33	42,085	57	57	27	16	12/15/2025	New Construction - Initial	1/1/1980
294	11500	Heil Ave	Venus Dr	Magnolia St	1	AC	E	2	700	32	17,990	53	63	37	0	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
295	4460	Hereford St	Lancashire Ave	Camphor Ave	1	AAC	E	2	627	36	24,083	74	19	81	0	11/24/2025	Overlay - AC Structural	3/1/2012
296	4470	Highcliff St	Stoneridge Ave	Carnation Dr	6	AC	E	2	500	33	17,312	86	44	56	0	1/19/2026	New Construction - Initial	1/1/1980
297	4480	Homer St	Dumont Ln	Nancy Lee Dr	2	AC	E	2	553	33	17,456	83	50	50	0	12/17/2025	Cold Mill and Overlay	2/8/2010
297	4490	Homer St	Nancy Lee Dr	Edwards St	2	AC	E	2	1,060	33	34,313	82	48	46	6	12/17/2025	New Construction - Initial	1/1/1980
297	4500	Homer St	Goldenwest St	Dumont Ln	2	AC	C	2	1,099	33	42,740	84	46	54	0	12/17/2025	Cold Mill and Overlay	2/8/2010
298	4510	Hood Dr	Goldenwest St	Siskiyou St	2	AC	E	2	929	33	30,618	61	40	47	13	1/2/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
300	4600	Hope St	Arundel Ave	Bolsa Ave	6	AAC	E	2	1,400	33	42,450	66	28	72	0	1/28/2026	Overlay - AC Structural	1/1/2019
301	4620	Horsham Ave	Uxbridge St	Ipswich St	1	AC	E	2	715	37	28,364	61	78	22	0	11/25/2025	New Construction - Initial	1/1/1980
302	4630	Hortense Dr	Beverly Ln	Gretchen Ln	6	AAC	E	2	567	33	18,280	89	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
302	4635	Hortense Dr	McFadden Ave	Beverly Ln	6	AC	E	2	283	33	10,118	89	20	66	14	1/27/2026	New Construction - Initial	1/1/1980
303	4640	Hospital Cir	S/O 21ST ST @ W/E	N/O 21ST ST @ E/E	4	AC	C	2	720	35	25,009	90	0	100	0	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
303	4650	Hospital Cir	N/O 21ST ST @ E/E	S/O 21ST ST @ W/E	4	AC	C	2	1,354	35	49,409	90	24	69	7	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
304	4660	Humboldt Ave	Goldenweset St	Siskiyou St	2	AC	E	2	1,202	34	36,380	70	50	50	0	12/30/2025	Cold Mill and Overlay	3/17/2011
304	4670	Humboldt Ave	Siskiyou St	Edwards St	2	AC	E	2	1,400	34	44,768	69	62	38	0	12/30/2025	New Construction - Initial	1/1/1980
305	4680	Hunter Ln	Natoma Ave	Elvira Ave	5	AC	E	2	473	33	15,084	100	0	0	0	1/14/2026	Unknown Activity	1/1/2007
305	4690	Hunter Ln	Bolsa Ave Frontage Rd	Elvira Ave	5	AC	E	2	694	33	23,295	100	0	0	0	1/14/2026	Unknown Activity	1/1/2007
306	4700	Huxley Cir	Brooke Ave	End	1	AC	E	2	400	36	14,391	74	14	76	10	1/6/2026	2" Conventional Overlay	9/30/2015
307	4710	Ida Wy	Chinook Ave	Glacier Dr	2	AAC	E	2	246	32	8,459	74	29	71	0	12/8/2025	Overlay - AC Structural	1/1/2019
307	4720	Ida Wy	Abraham Ave	California Ave	2	AAC	E	2	661	33	23,725	96	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
308	4730	Illinois St	Texas St	End	3	AC	E	2	150	30	8,609	45	0	31	69	1/6/2026	New Construction - Initial	1/1/1980
308	4740	Illinois St	Trask Ave	21st St	3	AC	E	2	1,235	34	40,263	76	23	48	29	12/26/2025	Surface Treatment - Slurry Seal	7/13/2011
308	4750	Illinois St	Natal Dr	Brooklawn Dr	3	AC	E	2	1,247	34	40,908	99	87	13	0	12/26/2025	New Construction - Initial	1/1/1980
308	4751	Illinois St	Brooklawn Dr	End	3	AC	E	2	270	33	11,722	100	0	100	0	1/2/2026	New Construction - Initial	1/1/1980
309	4770	Industry Wy	Old Edwards St	End	2	AC	C	2	687	45	32,655	89	0	100	0	12/9/2025	New Construction - Initial	1/1/1980
310	4780	Ingram Cir	Redlands St	End	5	AAC	E	2	450	36	17,457	84	0	31	69	1/21/2026	Overlay - AC Structural	1/1/2020
311	4790	Iowa St	Wyoming St	South End	3	AC	E	2	480	26	14,910	93	0	44	56	1/6/2026	New Construction - Initial	1/1/1980
311	4800	Iowa St	Natal Dr	Brooklawn Dr	3	AC	E	2	1,176	33	39,374	98	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
311	4801	Iowa St	Brooklawn Dr	End	3	AC	E	2	270	33	12,085	99	0	100	0	1/2/2026	New Construction - Initial	1/1/1980
311	4810	Iowa St	Trask Ave	21st St	3	AC	E	2	1,248	36	41,149	82	9	86	5	12/29/2025	Surface Treatment - Slurry Seal	7/13/2011
311	4811	Iowa St	21st St	End	3	AC	E	2	400	36	15,819	82	19	74	7	12/29/2025	New Construction - Initial	1/1/1980
311	90066	Iowa St	Wyoming St	North End	3	AC	E	2	170	26	4,443	97	0	100	0	1/6/2026	New Construction - Initial	1/1/1980
312	4820	Ipswich St	Horsham Ave	Tattershall Ave	1	AC	E	2	470	44	19,012	46	76	24	0	11/25/2025	New Construction - Initial	1/1/1980
313	4830	Irene Wy	Beverly Ln	Margo Ln	6	AAC	E	2	850	33	28,325	90	0	95	5	1/27/2026	Overlay - AC Structural	2/28/2022
314	4840	Iris Cir	Calendula Ave	End	6	AC	E	2	450	33	15,873	69	0	100	0	1/13/2026	2" Conventional Overlay	3/25/2015
315	4850	Iroquois Rd	Seneca Dr	Klamath Dr	2	AC	E	2	518	34	17,071	89	0	100	0	12/16/2025	New Construction - Initial	1/1/1980
315	4860	Iroquois Rd	Sprindale St	Barney St	2	AC	E	2	985	33	30,911	66	49	50	1	12/15/2025	New Construction - Initial	1/1/1980
315	4870	Iroquois Rd	Seneca Dr	Edwards St	2	AC	E	2	1,051	34	35,354	72	40	60	0	12/16/2025	New Construction - Initial	1/1/1980
315	4880	Iroquois Rd	Klamath Dr	Springdale St	2	AAC	E	2	1,592	33	49,064	87	35	65	0	12/16/2025	Surface Reconstruction - AC	7/23/2010
316	4890	Ixworth Pl	Baker St	End	1	AC	E	2	190	19	3,795	87	0	85	15	11/25/2025	Cold Mill and Overlay	10/20/2008
317	4900	Jackson St	Westminster Ave	15th St	4	AC	E	2	750	36	27,174	82	0	96	4	1/19/2026	Unknown Activity	12/30/2012
317	4910	Jackson St	Trask Ave	23rd St	4	AC	E	2	600	36	22,079	89	30	62	8	1/6/2026	New Construction - Initial	1/1/1980
317	4915	Jackson St	23rd St	21st St	4	AC	E	2	600	36	23,683	80	23	75	2	1/6/2026	Surface Treatment - Slurry Seal	7/13/2011
317	4920	Jackson St	21st St	Westminster Ave	4	AC	E	2	1,300	36	45,212	78	49	49	2	1/6/2026	Surface Treatment - Slurry Seal	7/13/2011
317	4925	Jackson St	McFadden Ave	Bishop Ave	3	AC	E	2	1,305	18	47,270	85	68	26	6	1/21/2026	New Construction - AC	1/1/1980
318	4930	Jade Cir	Diamond St	End	5	AC	E	2	200	33	7,750	61	0	70	30	2/2/2026	New Construction - Initial	1/1/1980
319	4940	Jane St	Barber St	Hammon Pl	1	AC	E	2	600	30	18,091	58	42	30	28	11/24/2025	New Construction - Initial	1/1/1980
320	4950	Janice St	Oasis Av	End	4	AC	E	2	550	33	21,017	94	0	100	0	1/19/2026	Cold Mill and Overlay	10/20/2008
320	4960	Janice St	Dia Av	Jennrich Av	4	AAC	E	2	800	33	24,605	86	61	23	16	1/20/2026	Surface Reconstruction - AC	12/24/2010
321	4970	Jasperson Wy	Westminster Av	End	4	AC	E	2	603	34	22,589	81	18	82	0	1/6/2026	Cold Mill and Overlay	2/8/2010
321	4980	Jasperson Wy	Benton Av	End	3	AC	E	2	715	34	23,632	69	40	49	11	1/2/2026	New Construction - Initial	1/1/1980
322	14110	Jefferson St	Worthy Dr	End	5	AC	E	0	308	33	11,332	87	42	16	42	1/9/2026	New Construction - Initial	1/1/1990
322	14120	Jefferson St	Worthy Dr	End	5	AC	E	0	278	33	9,601	86	40	27	33	1/9/2026	New Construction - Initial	1/1/1990
322	4990	Jefferson St	Trask Ave	23rd St	4	AC	E	2	650	33	20,309	85	14	84	2	1/6/2026	New Construction - Initial	1/1/1980
322	5000	Jefferson St	20th St	23rd St	4	AAC	E	2	1,000	33	32,660	84	18	82	0	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
323	5010	Jenner St	Vogel Av	Orwell Av	1	AAC	E	2	900	33	31,503	56	22	78	0	1/5/2026	Surface Reconstruction - AC	9/6/2011
324	5020	Jennrich Ave	Newland St	Purdy St	4	AC	E	2	830	33	28,791	80	43	48	9	1/20/2026	New Construction - Initial	1/1/1980
324	5030	Jennrich Ave	Bushard St	Moran St	4	AC	E	2	1,300	33	40,675	83	29	42	29	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
324	5040	Jennrich Ave	Moran St	Magnolia St	4	AC	E	2	1,300	33	43,069	84	36	53	11	1/20/2026	Surface Treatment - Slurry Seal	1/1/2020
324	5050	Jennrich Ave	Purdy St	End	4	AC	E	2	1,450	33	46,354	75	53	32	15	1/20/2026	New Construction - Initial	1/1/1980
325	5060	Jim St	Wells Rd	End	1	AC	E	2	250	33	7,401	49	82	18	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
326	5070	Jody Cir	Drey Rd	End	1	AC	E	2	750	33	27,989	65	65	35	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
327	5080	Jon Wy	Chinook Av	Glacier Dr	2	AAC	E	2	257	33	8,693	82	40	60	0	12/8/2025	Overlay - AC Structural	1/1/2019
328	5090	Jones Ave	Meinhardt Rd	Payson Dr	2	AC	E	2	796	34	27,033	83	73	27	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
329	5100	Jonquil Ave	Begonia St	Narcissus St	6	AC	E	2	770	36	25,184	73	0	100	0	1/13/2026	2" Conventional Overlay	3/25/2015
330	5110	Joyce Ave	13th St	Pembroke Ln	4	AC	E	2	808	33	28,887	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
331	5120	Judith Cir	Magnolia St	End	6	AAC	E	2	150	33	7,553	62	61	39	0	2/2/2026	Overlay - AC Structural	2/28/2022

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
332	5130	Judson Ave	Vassar St	End	3	AC	E	2	606	33	22,063	72	15	83	2	12/10/2025	New Construction - Initial	1/1/1980
333	5140	Jupiter Cir	Mercury Dr	End	1	AC	E	2	450	33	17,538	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
334	2070	Kathy St	Sowell Av	End	3	AAC	E	2	460	31	15,236	91	24	76	0	1/13/2026	Overlay - AC Structural	6/12/2013
335	5150	Keats Cir	Mint Av	End	1	AC	E	2	350	33	12,269	79	27	73	0	1/6/2026	2" Conventional Overlay	9/30/2015
336	5160	Kennedy Wy	Bushard St	END	5	AC	E	2	625	27	16,409	93	0	100	0	1/27/2026	Surface Treatment - Slurry Seal	1/1/2019
337	5170	Kensington Ln	Parkview Av	Arundel Av	6	AC	E	2	470	33	18,313	84	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
338	5180	Kent St	Cornwall Av	End	5	AAC	E	2	350	34	11,796	62	19	81	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
339	5190	Kern Ave	Nola st	End	4	AAC	E	2	130	33	6,083	86	0	92	8	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
339	5200	Kern Ave	Bushard St	Bonnema St	4	AC	E	2	450	33	13,838	90	0	100	0	1/21/2026	2" Conventional Overlay	11/2/2015
339	5210	Kern Ave	Castle St	Moran St	4	AC	E	2	460	33	14,810	90	0	96	4	1/21/2026	New Construction - Initial	1/1/1980
340	5220	Ketch Ave	Bowen St	END	6	AAC	E	2	400	33	15,500	84	0	100	0	1/28/2026	Surface Reconstruction - AC	9/6/2011
341	5230	King Cir	Ambassador Dr	End	6	AC	E	2	350	33	12,744	83	16	84	0	2/2/2026	2" Conventional Overlay	4/21/2016
342	5240	Kingcross Rd	Blackpool Rd	Baker St	1	AC	E	2	655	34	22,405	83	42	57	1	11/25/2025	Cold Mill and Overlay	10/20/2008
343	5250	Kiowa Rd	Cheyenne Dr	Cayuga Dr	2	AC	E	2	846	33	25,610	92	32	68	0	12/16/2025	Cold Mill and Overlay	3/10/2011
343	5260	Kiowa Rd	Edwards St	Williamette St	2	AC	E	2	1,044	33	35,337	57	55	45	0	1/2/2026	New Construction - Initial	1/1/1980
343	5270	Kiowa Rd	Cayuga Dr	Edwards St	2	AC	E	2	1,099	34	38,567	94	0	100	0	12/16/2025	Cold Mill and Overlay	3/10/2011
344	5280	Kipling Cir	Brooke Av	End	1	AC	E	2	600	36	22,014	71	26	74	0	1/6/2026	2" Conventional Overlay	9/30/2015
345	5290	Klamath Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	839	33	27,750	69	50	50	0	12/16/2025	Cold Mill and Overlay	3/10/2011
345	5300	Klamath Dr	Kiowa Rd	Apache Rd	2	AC	E	2	978	33	28,322	77	54	46	0	12/16/2025	New Construction - Initial	1/1/1980
346	5310	Klondike Ave	Olympus Dr	Sutter Dr	2	AC	E	2	561	33	18,953	78	35	64	1	12/30/2025	New Construction - Initial	1/1/1980
346	5320	Klondike Ave	Tahoe St	Yosemite Dr	2	AC	E	2	250	33	9,634	84	37	49	14	12/30/2025	New Construction - Initial	1/1/1980
346	5330	Klondike Ave	Williamette Dr	La Pat Pl	2	AC	E	2	623	33	19,295	89	20	80	0	12/17/2025	New Construction - Initial	1/1/1980
347	5340	Kramer Ave	Moran St	End	5	AC	C	2	450	37	17,952	67	49	51	0	1/27/2026	2" Conventional Overlay	9/30/2015
348	5400	La Pat Ct	La Pat Pl	End	2	AC	E	2	314	28	9,216	95	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
349	5350	La Pat Pl	Trask Av	Tillamook Av	2	AC	E	2	363	33	12,464	81	48	38	14	1/2/2026	Cold Mill and Overlay	10/20/2008
349	5360	La Pat Pl	Westminster Av	La Pat Ct	2	AC	E	2	581	33	19,863	93	0	93	7	12/17/2025	2" Conventional Overlay	4/21/2016
349	5370	La Pat Pl	Klondike Av	Humboldt Av	2	AC	E	2	845	33	29,950	83	36	42	22	12/17/2025	New Construction - Initial	1/1/1980
349	5390	La Pat Pl	Humboldt Av	Westminster Av	2	AC	E	2	1,423	33	47,303	74	29	71	0	12/17/2025	New Construction - Initial	1/1/1980
350	5380	La Pata St	Kiowa Rd	Garden Grove Blvd (Frontage St)	2	AAC	E	2	1,236	33	40,448	69	8	92	0	1/2/2026	Overlay - AC Structural	1/1/2019
351	5410	La Verne Cir	Milan St	End	1	AC	E	2	330	33	12,525	65	89	10	1	12/2/2025	Surface Treatment - Slurry Seal	7/13/2010
352	5420	Lafayette St	Rutgers Av	Wellesley Av	3	AAC	E	2	579	36	24,197	59	21	27	52	12/9/2025	Overlay - AC Structural	1/1/2020
353	5430	Lancashire Ave	Hammon Pl	Hereford St	1	AAC	E	2	873	36	31,431	69	17	83	0	11/24/2025	Overlay - AC Structural	3/1/2012
354	5440	Laramie Cir	Bowie St	End	5	AC	E	2	400	33	14,449	81	0	94	6	1/9/2026	Surface Treatment - Slurry Seal	4/28/2014
355	5450	Larkspur Dr	Canna St	Stinson Ln	6	AC	E	2	950	33	34,733	85	40	52	8	1/8/2026	New Construction - Initial	1/1/1980
355	5460	Larkspur Dr	Magnolia St	Canna St	6	AC	E	2	1,500	33	46,898	86	0	68	32	1/8/2026	New Construction - Initial	1/1/1980
356	5470	Las Flores St	San Angelo Av	End	6	AAC	E	2	651	36	23,390	89	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
357	5480	Las Lunas St	San Angelo Av	End	6	AAC	E	2	520	35	17,383	90	0	100	0	2/2/2026	Surface Reconstruction - AC	9/6/2011
358	5490	Las Nubes St	San Angelo Av	End	6	AAC	E	2	520	35	18,295	90	0	97	3	1/27/2026	Surface Reconstruction - AC	9/6/2011
359	5500	Las Solanas St	Florence Av	San Angelo Av	6	AAC	E	2	300	35	13,839	89	18	82	0	2/2/2026	Surface Reconstruction - AC	9/6/2011
360	5510	Laura Wy	Timothy Ln	Barry Pl	1	AC	E	2	500	33	15,744	70	62	38	0	1/5/2026	New Construction - Initial	1/1/1980
361	5520	Lava Wy	Obsidian Dr	End	6	AC	E	2	400	33	15,282	74	14	86	0	2/2/2026	New Construction - Initial	1/1/1980
362	5530	Lawrence Ave	Quartz St	End	1	AC	E	2	750	36	30,827	69	28	72	0	1/6/2026	2" Conventional Overlay	9/30/2015
9450	14130	Ledon Way	Pacific St	End	3	AC	E	0	236	33	10,037	83	0	77	23	1/20/2026	New Construction - Initial	1/1/1990
9450	14140	Ledon Way	Cedarwood Ave	End	3	AC	E	0	326	33	13,005	87	17	62	21	1/20/2026	New Construction - Initial	1/1/1990
363	5550	Lee Dr	Meinhardt Rd	Dorothy Dr	2	AC	E	2	1,294	33	43,815	74	59	23	18	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
364	5560	Leeds Cir	Melric Av	End	6	AC	E	2	400	33	15,277	73	24	58	18	1/22/2026	New Construction - Initial	1/1/1980
365	5570	Lehigh Pl	Temple St	End	3	AAC	E	2	390	33	16,592	83	43	57	0	1/20/2026	Overlay - AC Structural	12/30/2013
365	5580	Lehigh Pl	Temple St	End	3	AAC	E	2	702	33	26,623	86	0	100	0	1/20/2026	Overlay - AC Structural	12/30/2013
366	5590	Leo Pl	Lipkin Dr	Cardillo Dr	4	AAC	E	2	242	34	10,945	82	0	84	16	1/6/2026	Overlay - AC Structural	5/22/2017
367	5600	Lido Ave	Balboa St	Coronado St	5	AC	E	2	200	35	10,300	100	0	0	0	1/14/2026	Unknown Activity	4/1/2009
368	5610	Lilac Cir	Poinsettia Wy	End	6	AC	E	2	250	33	10,360	68	52	19	29	2/2/2026	New Construction - Initial	1/1/1980
369	5620	Lipkin Dr	Westminster Av	Leo Pl	4	AAC	E	2	455	35	16,052	83	0	95	5	1/6/2026	Overlay - AC Structural	5/22/2017
370	5640	Locust St	Main St	Maple St	3	AC	E	2	592	61	32,841	80	29	39	32	1/13/2026	Unknown Activity	6/30/2008
370	5650	Locust St	Main St	Westminster Av	3	AC	E	2	1,236	44	51,072	85	68	21	11	1/13/2026	2" Conventional Overlay	4/21/2016
370	5660	Locust St	21st St	Westminster Av	3	AAC	E	2	1,230	36	43,092	99	0	100	0	1/6/2026	Overlay - AC Structural	2/28/2022
371	5670	Lomay Ave	Wilson St	Newland St	4	AC	E	2	600	33	21,376	78	51	18	31	1/7/2026	Cold Mill and Overlay	2/1/2010
372	5680	Lotus Dr	Poinsettia Wy	Camelia Ln	6	AAC	E	2	500	33	15,849	91	0	100	0	1/20/2026	Overlay - AC Structural	2/28/2022
373	5690	Lowell Cir	Milan St	End	1	AC	E	2	623	33	23,556	64	86	13	1	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
374	5700	Loyola Ave	Winthrop St	Bolsa Chica Rd	1	AC	E	2	613	32	19,830	45	63	37	0	11/19/2025	Unknown Activity	8/30/2008
374	5710	Loyola Ave	University St	Winthrop St	1	AC	E	2	1,275	33	43,764	76	43	43	14	11/19/2025	Unknown Activity	8/30/2008

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
375	5720	Lunar St	Universe Av	End	1	AC	E	2	500	33	17,893	58	53	37	10	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
376	5730	Lutford St	Milan St	End	1	AAC	E	2	351	33	14,183	99	0	63	37	11/24/2025	Overlay - AC Structural	1/1/2020
377	5740	Macon Cir	Monticello Cir	End	4	AC	E	2	200	33	8,273	59	0	83	17	1/19/2026	Unknown Activity	6/14/2010
378	5750	Madison Ave	Colleta Pl	End	5	AC	E	2	300	33	11,591	92	0	88	12	1/26/2026	Unknown Activity	1/1/2007
378	5760	Madison Ave	Moran St	Bushard St	5	AC	E	2	1,150	33	38,055	80	17	83	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
379	5770	Madison Cir	Bushard St	End	5	AC	E	2	650	37	24,698	94	0	100	0	1/27/2026	Surface Treatment - Slurry Seal	1/1/2019
381	5800	Mahogany Ave	Springdale St	Ebony Wy	2	AC	E	2	1,112	32	36,335	70	25	75	0	12/2/2025	New Construction - Initial	1/1/1980
382	5810	Maidstone St	Northampton Av	City Limit	6	AAC	E	2	525	37	20,163	80	9	67	24	1/27/2026	Overlay - AC Structural	6/26/2013
383	5820	Main St	Hoover St	Chestnut St	3	AC	E	2	1,268	53	67,391	89	18	78	4	1/13/2026	2" Conventional Overlay	4/21/2016
383	5830	Main St	Chestnut St	Goldenwest St	3	AC	C	2	1,309	53	66,928	100	0	100	0	1/13/2026	New Construction - Initial	1/1/1980
384	5850	Malibu Cir	Middleton Ln	End	4	AC	E	2	200	36	8,355	72	28	30	42	1/19/2026	Unknown Activity	6/14/2010
385	5860	Manor Dr	19th St	18th St	4	AAC	E	2	283	32	10,180	73	9	91	0	1/6/2026	Overlay - AC Structural	1/30/2014
385	5870	Manor Dr	19th St	21st St	4	AAC	E	2	603	34	20,468	82	0	93	7	1/6/2026	Overlay - AC Structural	1/30/2014
386	5880	Maple St	Olive St	Village Wy	3	AC	E	2	915	60	49,442	89	0	86	14	1/13/2026	Unknown Activity	1/1/2007
386	5890	Maple St	Village Wy	Goldenwest St	3	AC	C	2	995	60	49,809	100	0	0	0	1/13/2026	Surface Treatment - Slurry Seal	1/1/2007
386	5900	Maple St	Olive St	End	3	AC	E	2	347	33	12,433	85	25	75	0	1/13/2026	New Construction - Initial	1/1/1980
386	5910	Maple St	Willow Ln	Old Edwards St	2	AC	C	2	955	30	36,431	54	20	41	39	12/9/2025	New Construction - Initial	1/1/1980
387	5920	Marble Cir	Diamond St	End	5	AC	E	2	200	33	7,994	76	0	55	45	2/2/2026	New Construction - Initial	1/1/1980
388	5930	Margate Cir	Oakcliff Dr	End	6	AC	E	2	400	33	15,236	86	0	93	7	1/14/2026	Cold Mill and Overlay	2/1/2010
389	5940	Margo Ln	Brookhurst St	Candlewood St	6	AAC	C	2	594	36	22,383	70	39	33	28	1/12/2026	Surface Reconstruction - AC	9/6/2011
389	5950	Margo Ln	Irene Wy	Brookhurst St	6	AC	E	2	1,050	33	34,593	91	19	43	38	1/27/2026	New Construction - Initial	1/1/1980
390	5960	Marie Pl	Beverly Ln	Gretchen Ln	6	AAC	E	2	600	33	18,299	91	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
391	5970	Marilyn Cir	Meinhardt Rd	End	2	AC	E	2	468	33	17,223	78	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
392	5980	Mariner Ln	Melrose Cir	Middleton Ln	4	AC	E	2	350	37	12,116	58	61	34	5	1/19/2026	Unknown Activity	6/14/2010
393	5990	Marion Ave	Newland St	Riverton St	4	AC	E	2	450	34	14,815	85	19	81	0	1/20/2026	New Construction - Initial	1/1/1980
394	6000	Marion Cir	Monroe Ln	End	4	AC	E	2	350	33	12,213	64	5	86	9	1/19/2026	Unknown Activity	6/14/2010
395	6010	Marlborough Cir	Nottingham Av	End	6	AC	E	2	200	33	7,946	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
396	6020	Marlowe Cir	Birmingham Dr	End	1	AC	E	2	130	32	6,919	72	19	81	0	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
397	6030	Marquette St	Yale Av	Purdue Av	1	AC	E	2	937	33	30,194	72	86	14	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
398	11520	Mars St	Universe Av	End	1	AC	E	2	105	32	3,920	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
399	6040	Maryknoll St	Carlton Av	End	3	AC	E	2	1,093	33	41,591	68	36	64	0	12/10/2025	Unknown Activity	6/14/2010
400	6050	Mast Ave	Ward St	Hope St	6	AAC	E	2	1,450	33	45,090	64	22	78	0	1/28/2026	Overlay - AC Structural	1/1/2019
401	6060	Mayberry Cir	Wellesley Av	End	3	AAC	E	2	350	33	13,829	68	55	45	0	12/10/2025	Overlay - AC Structural	1/1/2020
402	6070	Maybrook St	Emerald Av	Edinger Av	5	AC	E	2	1,139	33	37,395	87	18	82	0	1/7/2026	Unknown Activity	4/1/2009
403	6080	Maychick Cir	Iroquois Rd	End	2	AC	E	2	140	34	6,296	79	27	73	0	12/15/2025	New Construction - Initial	1/1/1980
404	6120	McClure Ave	Titus St	End	4	AAC	E	2	700	33	25,125	92	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
404	6130	McClure Ave	Bonnema St	Moran St	4	AC	E	2	750	33	25,938	78	0	57	43	1/21/2026	New Construction - Initial	1/1/1980
404	6140	McClure Ave	Magnolia St	Straight St	4	AAC	E	2	400	33	16,250	88	0	94	6	1/20/2026	Surface Reconstruction - AC	12/24/2010
406	10905	McFadden Ave Frontage Rd	McFadden Av	Hortense Dr	6	AC	E	2	750	26	18,830	88	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
407	6110	McKinley Cir	Bestel Av	End	2	AC	E	2	396	33	15,326	92	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
408	6150	Medora Pl	23rd St	End	4	AAC	E	2	550	33	18,843	80	44	56	0	1/6/2026	Overlay - AC Structural	3/25/2010
409	6160	Megan Ct	Forrest Ln	End	6	AC	E	2	90	30	5,279	68	10	90	0	1/28/2026	New Construction - Initial	1/1/1980
410	9850	Meinhardt Rd	Barney St	End	2	AC	E	2	1,586	32	48,561	78	20	39	41	12/15/2025	New Construction - Initial	1/1/1980
410	9860	Meinhardt Rd	Springdale St	Barney St	2	AC	E	2	1,628	32	53,103	76	36	34	30	12/15/2025	New Construction - Initial	1/1/1980
411	6170	Melanie Ln	Garden Grove Blvd	Springdale St	2	AC	C	2	1,390	33	45,922	70	38	37	25	12/16/2025	New Construction - Initial	1/1/1980
412	6180	Melric Ave	Ward St	End	6	AC	E	2	1,283	35	44,746	71	56	44	0	1/22/2026	New Construction - Initial	1/1/1980
413	6190	Melrose Cir	Mariner Ln	End	4	AC	E	2	250	37	12,645	64	25	72	3	1/19/2026	Unknown Activity	6/14/2010
414	6200	Mercury Dr	Universe Av	Galaxy Dr	1	AC	E	2	1,100	33	34,007	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
415	6210	Mesa Cir	Monticello Cir	End	4	AC	E	2	150	33	7,185	55	0	86	14	1/19/2026	Unknown Activity	6/14/2010
416	6220	Miami Ave	Riverton St	Riata St	4	AC	E	2	320	35	11,153	83	0	100	0	1/20/2026	New Construction - Initial	1/1/1980
417	6230	Miami Cir	Monroe Ln	End	4	AC	E	2	550	33	19,675	59	51	49	0	1/19/2026	Unknown Activity	6/14/2010
418	6240	Middleborough St	Melric Av	Tennyson Av	6	AC	E	2	620	35	19,946	98	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
419	6250	Middletown Ln	Newland St	Monroe Ln	4	AC	E	2	1,600	33	53,746	90	0	65	35	1/19/2026	Cold Mill and Overlay	10/20/2008
420	6260	Milan Ave	Westminster Av	End	1	AC	E	2	890	37	32,956	69	21	79	0	11/24/2025	New Construction - Initial	1/1/1980
420	6280	Milan Ave	Alfred Av	Vallecito Av	1	AC	E	2	1,231	33	47,092	67	9	88	3	12/1/2025	New Construction - Initial	1/1/1980
420	6290	Milan Ave	Westminster Av	Alfred Av	1	AC	E	2	1,234	33	32,995	54	26	62	12	12/1/2025	New Construction - Initial	1/1/1980
421	6270	Milan St	Duncannon Av	Stratford Av	1	AC	E	2	1,077	33	38,056	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
421	6300	Milan St	Vallecito Av	Duncannon Av	1	AC	E	2	1,311	33	50,185	68	0	81	19	12/1/2025	New Construction - Initial	1/1/1980
422	6310	Milky Wy	Galaxy Dr	End	1	AC	E	2	250	33	9,955	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
423	6320	Mills Cir	Oberlin Av	End	5	AAC	E	2	350	36	13,147	94	0	88	12	1/9/2026	Overlay - AC Structural	1/1/2020

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
424	6330	Milton Ave	Hefley St	End	2	AAC	E	2	1,160	35	44,482	72	10	52	38	12/15/2025	Surface Reconstruction - AC	2/1/2009
424	6340	Milton Ave	Willow Ln	Hefley St	2	AC	C	2	1,221	33	38,068	75	18	44	38	12/15/2025	Unknown Activity	4/1/2009
425	6350	Mint Ave	Osborne St	Magnolia St	1	AC	E	2	450	36	14,373	75	32	68	0	1/6/2026	2" Conventional Overlay	9/30/2015
426	6360	Mirage Ave	Glitter St	End	4	AC	E	2	820	36	26,906	79	24	73	3	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
426	6365	Mirage Ave	Bushard St	W End	4	AC	E	2	195	32	9,137	89	0	36	64	1/21/2026	New Construction - AC	1/1/1980
427	6370	Mirror Cir	Mooncrest St	End	4	AC	E	2	220	33	8,568	83	14	86	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
428	6390	Modoc Dr	Comanche Dr	Sioux Rd	2	AC	E	2	671	48	22,680	74	48	44	8	12/16/2025	New Construction - Initial	1/1/1980
429	6400	Mohawk Rd	Navajo Rd	Cayuga Dr	2	AC	E	2	802	34	27,811	77	15	85	0	12/16/2025	Cold Mill and Overlay	2/8/2010
430	6410	Mono Pl	Mohawk Rd	End	2	AC	E	2	168	33	8,361	83	0	98	2	12/16/2025	Cold Mill and Overlay	2/8/2010
431	6420	Monroe Ln	Hazard	End	4	AC	E	2	1,050	33	34,774	96	0	100	0	1/19/2026	Cold Mill and Overlay	10/20/2008
432	14150	Monroe St	McFadden Ave	Worthy Dr	5	AC	E	0	1,155	33	35,357	95	38	62	0	1/9/2026	New Construction - Initial	1/1/1990
432	14160	Monroe St	Worthy Dr	City Limit	5	AC	E	0	122	33	3,639	87	64	36	0	1/9/2026	New Construction - Initial	1/1/1990
432	6430	Monroe St	21st St	23rd St	4	AC	E	2	650	33	20,686	84	0	89	11	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
432	6440	Monroe St	Worthy Dr	Crown Ct	5	AC	E	2	1,050	36	36,445	73	43	55	2	1/21/2026	Cold Mill and Overlay	2/8/2010
432	6460	Monroe St	Westminster Av	21st St	4	AC	E	2	1,300	34	47,182	79	36	62	2	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
433	6480	Monterey Cir	Eden St	End	5	AAC	E	2	450	33	15,206	89	0	100	0	1/7/2026	Overlay - AC Structural	12/30/2013
434	6490	Montgomery Dr	Milan Av	Westminster Av	1	AAC	E	2	826	38	31,138	99	0	0	100	11/24/2025	Overlay - AC Structural	1/1/2020
435	6500	Monticello Cir	Monroe Ln	End	4	AC	E	2	650	33	23,291	61	8	84	8	1/19/2026	Unknown Activity	6/14/2010
436	6510	Montrose Ave	Eden St	End	5	AC	E	2	1,200	33	41,573	97	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
437	6520	Mooncrest St	Oasis St	End	4	AC	E	2	750	33	27,855	82	34	64	2	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
438	6530	Moran St	Jennrich Av	Hazard Av	4	AC	E	2	1,100	36	35,247	85	16	77	7	1/20/2026	Surface Treatment - Slurry Seal	1/1/2020
438	6540	Moran St	Hazard Av	Madison Av	5	AC	E	2	1,150	34	38,454	77	40	60	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
438	6550	Moran St	Bolsa Av	End	5	AC	C	2	1,150	43	49,786	83	12	88	0	1/27/2026	2" Conventional Overlay	9/30/2015
438	6560	Moran St	Bolsa Av	Bishop Pl	6	AC	E	2	1,242	36	45,587	70	44	56	0	3/24/2026	New Construction - Initial	1/1/1980
439	6380	Myrtlewood Cir	Wilson St	End	5	AAC	E	2	350	38	13,670	78	0	98	2	1/9/2026	Overlay - AC Structural	1/1/2019
440	6570	Nancy Lee Dr	Westminster Av	Homer St	2	AC	E	2	1,187	33	42,656	68	73	27	0	12/17/2025	New Construction - Initial	1/1/1980
440	6571	Nancy Lee Dr	Homer St	End	2	AC	E	2	135	33	3,905	86	0	100	0	12/17/2025	Cold Mill and Overlay	3/17/2011
441	6580	Nantucket St	McFadden Av	Bermuda Av	5	AAC	E	2	100	35	4,476	85	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
441	6590	Nantucket St	McFadden Av	End	5	AC	E	2	750	42	25,837	69	28	53	19	1/19/2026	Cold Mill and Overlay	10/20/2008
442	6600	Narcissus St	Calendula Av	McFadden Av	6	AC	E	2	600	40	18,845	84	12	88	0	1/13/2026	2" Conventional Overlay	3/25/2015
443	6610	Natal Dr	Iowa St	Cedar St	3	AC	E	2	1,014	33	35,757	97	0	82	18	12/26/2025	New Construction - Initial	1/1/1980
443	6620	Natal Dr	Cedar St	Goldenwest St	3	AAC	C	2	1,230	36	44,092	79	41	48	11	12/26/2025	Overlay - AC Structural	1/1/2020
444	6630	Natoma Ave	Coronado St	Clemente St	5	AAC	E	2	282	33	9,417	96	0	0	100	1/14/2026	Overlay - AC Structural	7/30/2023
444	6635	Natoma Ave	Eden St	End	5	AC	E	2	916	33	29,082	89	61	39	0	1/14/2026	New Construction - Initial	1/1/1980
444	6640	Natoma Ave	Eden St	Magnolia St	5	AC	E	2	1,200	33	39,097	74	24	26	50	1/14/2026	New Construction - Initial	1/1/1980
445	6650	Navajo Dr	Edwards St	Klamath Dr	2	AC	E	2	952	33	63,668	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
445	6660	Navajo Dr	Klamath Dr	Choctaw Dr	2	AC	E	2	1,091	33	517	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
445	6670	Navajo Dr	Choctaw Dr	Springdale St	2	AC	E	2	1,527	33	52,856	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
446	6690	Neece St	Natoma Av	Bishop Av	5	AC	E	2	250	34	9,297	80	0	59	41	1/19/2026	New Construction - Initial	1/1/1980
446	6700	Neece St	Rathburn Ave	Thorpe Ave	5	AC	E	2	250	33	8,802	79	18	62	20	1/19/2026	New Construction - Initial	1/1/1980
446	6710	Neece St	Bolsa Ave Frontage Rd	Elvira Av	5	AC	E	2	700	33	22,752	97	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
447	6720	Nelson St	End	End	1	AC	E	2	450	33	18,531	71	14	60	26	1/6/2026	2" Conventional Overlay	9/30/2015
448	6730	Neptune Cir	Galaxy Dr	End	1	AC	E	2	500	33	18,086	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
449	6740	Nevada St	Brooklawn Dr	End	3	AC	E	2	234	34	9,742	79	10	86	4	1/5/2026	Cold Mill and Overlay	2/8/2010
449	6750	Nevada St	Westminster Av	California Av	4	AC	E	2	281	33	8,942	79	10	90	0	1/5/2026	New Construction - Initial	1/1/1980
449	6760	Nevada St	Bestel Av	Benton Av	3	AC	E	2	618	33	20,949	85	31	67	2	1/5/2026	Cold Mill and Overlay	2/8/2010
450	6770	Newcastle Ave	Kent St	Brookhurst St	5	AAC	E	2	879	37	33,849	57	10	90	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
452	6820	Nola St	Hazard Av	Jennrich Av	4	AAC	E	2	1,050	33	35,398	94	0	69	31	1/20/2026	Surface Reconstruction - AC	12/24/2010
453	6830	Norma Dr	Meinhardt Rd	Lee Dr	2	AC	E	2	900	33	30,412	73	7	93	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
454	6840	Northampton Ave	Maidstone St	Exeter St	6	AAC	E	2	800	37	33,425	85	0	100	0	1/27/2026	Overlay - AC Structural	6/26/2013
455	6860	Northwestern Wy	Bolsa Chica Rd	End	1	AC	E	2	685	37	32,064	93	0	88	12	11/19/2025	Unknown Activity	8/30/2008
456	6870	Norwich Cir	Banbury Av	End	6	AAC	E	2	200	37	12,745	80	0	79	21	2/2/2026	Overlay - AC Structural	6/26/2013
457	6880	Notre Dame St	McFadden Av	Tracy Av	3	AC	E	2	670	34	24,488	67	52	42	6	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
457	6885	Notre Dame St	Tracy Av	End	3	AC	E	2	500	34	19,987	70	59	34	7	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
458	6890	Nottingham Ave	Ward St	McFadden Av	6	AC	E	2	2,048	37	79,103	100	0	0	0	1/21/2026	Cold Mill and Overlay	2/8/2010
459	6900	Oak Pl	Placer Av	End	1	AC	E	2	142	58	7,092	53	44	56	0	12/1/2025	New Construction - Initial	1/1/1980
460	6910	Oakcliff Dr	McFadden Av	Carnation Dr	6	AC	E	2	300	33	9,111	91	23	77	0	1/19/2026	New Construction - Initial	1/1/1980
460	6920	Oakcliff Dr	McFadden Av	Coronet Av	6	AAC	E	2	1,150	36	41,265	85	13	82	5	1/14/2026	Surface Reconstruction - AC	11/26/2008
461	6930	Oasis Ave	Glitter St	Bushard St	4	AC	E	2	1,100	33	36,876	82	14	81	5	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
461	6940	Oasis Ave	Magnolia St	Glitter St	4	AC	E	2	1,400	33	46,482	86	19	74	7	1/20/2026	Surface Treatment - Slurry Seal	1/1/2019

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
461	6950	Oasis Ave	Newland St	End	4	AC	E	2	1,600	33	52,575	75	16	56	28	1/19/2026	Unknown Activity	4/1/2009
462	6970	Oberlin Ave	Rochester St	Newland St	5	AAC	E	2	600	37	22,469	94	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
463	6980	Obsidian Dr	Magnolia St	End	6	AC	E	2	1,250	33	40,845	77	27	73	0	1/8/2026	New Construction - Initial	1/1/1980
464	7000	Olive St	Park St	Westminster Av	3	AC	E	2	793	54	40,856	73	27	35	38	1/13/2026	New Construction - Initial	1/1/1980
464	7010	Olive St	Park St	Hazard Av	3	AC	E	2	1,724	54	89,876	71	27	49	24	1/13/2026	New Construction - Initial	1/1/1980
464	7020	Olive St	Westminster Av	21st St	3	AC	C	2	1,266	43	51,123	81	58	32	10	1/6/2026	Unknown Activity	6/30/2008
464	7030	Olive St	21st St	Trask Av	3	AC	E	2	1,260	33	41,281	86	14	58	28	12/29/2025	New Construction - Initial	1/1/1980
464	7031	Olive St	Brooklawn Dr	End	3	AC	E	2	270	33	11,693	98	0	35	65	1/2/2026	New Construction - Initial	1/1/1980
465	7050	Olympus Dr	Tillamook Av	Trask Av	2	AC	E	2	368	33	13,246	79	28	72	0	12/30/2025	Cold Mill and Overlay	10/20/2008
465	7060	Olympus Dr	Humboldt Av	Clondike Av	2	AC	E	2	865	33	28,974	84	22	78	0	12/30/2025	New Construction - Initial	1/1/1980
466	7070	Ontario Dr	Hazard Av	End	4	AC	E	2	350	50	13,947	80	10	88	2	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
466	7080	Ontario Dr	Hazard Av	Madison Av	5	AC	E	2	1,150	34	35,081	83	36	64	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
467	7090	Onyx Ave	Quartz St	Plumwood St	5	AC	E	2	250	33	6,828	88	0	100	0	1/7/2026	Unknown Activity	4/1/2009
468	7100	Opal Cir	Diamond St	End	5	AC	E	2	200	33	8,036	69	0	67	33	2/2/2026	New Construction - Initial	1/1/1980
469	7110	Orchid Dr	Canna St	Azalea Wy	6	AC	E	2	1,000	33	31,414	79	37	31	32	1/8/2026	New Construction - Initial	1/1/1980
470	7120	Ord Wy	Edinger Av	Vogel Av	1	AAC	E	2	100	33	5,544	58	0	100	0	1/5/2026	Surface Reconstruction - AC	9/6/2011
470	7130	Ord Wy	Edinger Av	Cody Av	5	AAC	E	2	150	33	6,361	86	0	81	19	2/2/2026	Surface Reconstruction - AC	2/8/2010
471	7140	Orrey Pl	Nola St	End	4	AAC	E	2	130	33	6,262	92	0	95	5	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
471	7150	Orrey Pl	Moran St	End	4	AC	E	2	250	45	8,468	83	0	94	6	1/21/2026	New Construction - Initial	1/1/1980
472	7160	Orwell Ave	Jenner St	Quartz St	1	AC	E	2	1,263	36	47,923	87	0	50	50	1/5/2026	New Construction - Initial	1/1/1980
473	7170	Osborne St	Brooke Av	End	1	AC	E	2	750	36	26,895	74	14	86	0	1/6/2026	2" Conventional Overlay	9/30/2015
474	7180	Oso Wy	Cedar St	End	3	AAC	E	2	175	33	7,865	92	0	100	0	1/2/2026	Overlay - AC Structural	3/25/2010
475	7200	Oxford Cir	Nottingham Av	End	6	AC	E	2	200	33	7,525	97	0	100	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
476	7210	Pacheco Ave	Padres Av	End	5	AC	E	2	250	33	9,425	82	32	33	35	1/19/2026	New Construction - Initial	1/1/1980
476	7220	Pacheco Ave	Purdy St	Webster St	5	AC	E	2	1,200	33	37,458	82	0	51	49	1/19/2026	New Construction - Initial	1/1/1980
477	7240	Pacific Ave	Westminster Av	19th St	4	AAC	E	2	635	38	21,831	69	14	86	0	1/6/2026	Overlay - AC Structural	1/30/2014
477	7250	Pacific Ave	19th St	23rd St	4	AAC	E	2	1,345	34	44,185	68	14	82	4	1/6/2026	Overlay - AC Structural	1/30/2014
477	7260	Pacific Ave	10th St	13th St	4	AC	E	2	932	40	38,688	48	56	24	20	1/14/2026	New Construction - Initial	1/1/1980
477	7270	Pacific Ave	13th St	Westminster Av	4	AC	E	2	1,313	40	50,433	65	58	38	4	1/14/2026	New Construction - Initial	1/1/1980
9500	14170	Pacific St	Bolsa Ave	End	3	AC	E	0	602	32	19,743	91	28	72	0	1/21/2026	New Construction - Initial	1/1/1990
9500	14180	Pacific St	Harhay Ave	McFadden Ave	3	AC	E	0	1,171	33	36,949	86	17	34	49	1/20/2026	New Construction - Initial	1/1/1990
478	7280	Padres St	Natoma Av	Elvira Av	5	AC	E	2	500	35	14,943	100	0	0	0	2/19/2026	Unknown Activity	1/1/2007
478	7290	Padres St	Thorpe Av	Bishop Av	5	AC	E	2	750	33	23,379	82	29	52	19	1/19/2026	New Construction - Initial	1/1/1980
479	7300	Pal Wy	Cedar St	End	3	AAC	E	2	300	33	11,259	90	0	100	0	1/2/2026	Overlay - AC Structural	3/25/2010
480	7310	Palomar St	Trask Av	Tillamook Av	2	AC	E	2	360	33	12,534	88	0	100	0	1/2/2026	Surface Treatment - Slurry Seal	6/14/2010
480	7320	Palomar St	Kiowa Rd	Garden Grove Blvd (Frontage Rd)	2	AAC	E	2	996	33	32,684	78	0	100	0	1/2/2026	Overlay - AC Structural	1/1/2020
480	7330	Palomar St	Humboldt Av	Trask Av	2	AC	E	2	1,135	33	36,768	79	75	25	0	12/30/2025	New Construction - Initial	1/1/1980
481	7340	Palos Verde Ave	Skylinks Cir	Burning Tree St	5	AC	E	2	1,570	33	57,476	97	0	100	0	1/7/2026	New Construction - Initial	1/1/1980
481	7342	Palos Verde Ave	Newland St	Skylinks Cir	5	AC	E	2	374	33	14,389	97	100	0	0	1/7/2026	New Construction - Initial	1/1/1980
481	7345	Palos Verde Ave	Burning Tree St	End	5	AC	E	2	465	33	17,579	99	0	100	0	1/7/2026	New Construction - Initial	1/1/1980
482	7350	Pamela Ln	End	End	2	AC	E	2	796	33	31,496	81	16	84	0	12/16/2025	2" Conventional Overlay	3/25/2015
483	7360	Park St	Locust St	Olive St	3	AC	E	2	1,276	43	55,483	71	33	52	15	1/13/2026	Unknown Activity	6/30/2008
484	7370	Parkview Ave	Golders Green Ln	End	6	AC	E	2	750	33	25,231	78	13	87	0	1/27/2026	New Construction - Initial	1/1/1980
484	7380	Parkview Ave	Petsworth Ln	Golders Green Ln	6	AC	E	2	1,136	36	41,413	79	34	59	7	1/28/2026	New Construction - Initial	1/1/1980
484	7385	Parkview Ave	Ward St	Petsworth Ln	6	AC	E	2	660	36	21,737	55	26	38	36	1/28/2026	New Construction - Initial	1/1/1980
485	7390	Parliament Ave	Commonwealth Pl	Edinger Av	6	AC	E	2	1,385	33	41,342	81	31	67	2	1/8/2026	2" Conventional Overlay	4/21/2016
486	7400	Patrice Ave	Margo Ln	Gretchen Ln	6	AAC	E	2	200	33	8,494	90	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
487	7410	Paul Dr	Homer St	Wee Wy	2	AC	E	2	339	33	13,046	84	14	86	0	12/17/2025	Surface Treatment - Slurry Seal	4/28/2014
488	7420	Paysen Dr	Jones Av	Meinhardt Rd	2	AC	E	2	800	34	27,344	94	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
489	7430	Peachwood Cir	Dogwood St	Newland St	5	AAC	E	2	500	37	18,967	92	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
490	7440	Peak Cir	Sequoia Dr	End	2	AC	E	2	160	33	7,730	66	0	65	35	1/2/2026	Unknown Activity	4/1/2009
491	7450	Pebble Beach Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,719	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
492	7460	Pegg St	Westminster Av	End	1	AAC	E	2	407	36	13,788	54	0	100	0	12/1/2025	Overlay - AC Structural	4/28/2014
493	7470	Pembroke Ln	Cedarwood Av	Joyce Av	4	AC	E	2	519	33	17,187	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
494	7480	Pensacola St	Bermuda Av	Palos Verdes Av	5	AC	E	2	1,000	36	34,803	100	0	0	0	1/7/2026	New Construction - Initial	1/1/1980
495	7490	Pepperdine Cir	Lowell Cir	End	1	AC	E	2	354	33	13,896	67	89	11	0	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
496	7500	Pepperwood Cir	Dogwood St	End	5	AAC	E	2	500	36	17,572	90	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
9600	14190	Peters Ave	Monroe St	Wilson St	5	AC	E	0	565	33	16,010	90	0	82	18	1/9/2026	New Construction - Initial	1/1/1990
497	7520	Petsworth Ln	Hazard Av	Parkview Av	6	AC	E	2	630	37	22,304	75	46	54	0	1/28/2026	New Construction - Initial	1/1/1980
498	7530	Piccadilly Cir	Kingcross Rd	Round About	1	AC	E	2	1,479	30	39,977	87	70	30	0	11/25/2025	Cold Mill and Overlay	2/8/2010

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
499	7540	Pickford St	Melric Av	Cunningham Av	6	AC	E	2	630	33	21,228	70	47	43	10	4/19/2022	Cold Mill and Overlay	2/8/2010
500	7550	Pimlico Rd	Victoria Pl	Hampton Ct	1	AAC	E	2	493	31	16,199	88	19	81	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
501	7560	Pine St	Bestel Av	Stahov Av	3	AC	E	2	233	34	7,989	99	0	100	0	12/26/2025	New Construction - Initial	1/1/1980
501	7570	Pine St	21st St	Westminster Av	3	AAC	E	2	1,228	30	39,870	82	11	12	77	1/6/2026	Surface Reconstruction - AC	9/6/2011
501	7580	Pine St	Maple St	End	3	PCC	E	2	165	20	3,488	61	74	26	0	3/25/2026	New Construction - PCC	1/1/1980
502	7590	Pinehurst Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,472	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
503	7600	Placer Ave	Milan Av	Vallecito Dr	1	AC	E	2	1,115	33	37,564	83	23	77	0	12/1/2025	New Construction - Initial	1/1/1980
504	7610	Plaza St	Olive St	Locust St	3	AC	E	2	1,280	53	64,224	85	54	46	0	1/13/2026	New Construction - Initial	1/1/1980
505	7620	Plumwood St	Emerald Av	END	5	AC	E	2	1,050	33	33,697	88	0	96	4	1/7/2026	Unknown Activity	4/1/2009
506	7630	Poinsettia Wy	McFadden Av	Coronet Av	6	AC	E	2	1,100	36	39,890	75	16	68	16	1/13/2026	Unknown Activity	4/1/2009
506	7640	Poinsettia Wy	Larkspur Dr	McFadden Av	6	AC	E	2	1,408	33	42,864	77	52	37	11	1/8/2026	New Construction - Initial	1/1/1980
507	7650	Poppy Cir	Poppy Wy	End	6	AC	E	2	200	33	11,516	79	42	51	7	1/19/2026	New Construction - Initial	1/1/1980
508	7660	Poppy Wy	Orchid Dr	Poppy Cir	6	AC	E	2	300	33	9,763	78	25	53	22	1/19/2026	New Construction - Initial	1/1/1980
1058	90065	Portsmouth Cir	Fenway Dr	End	3	AAC	E	2	440	36	18,273	100	0	100	0	1/2/2026	Overlay - AC Structural	9/15/2023
509	7670	Premier Ave	Forrest Ln	Brookhurst St	6	AC	E	2	800	37	29,313	55	30	70	0	1/27/2026	Cold Mill and Overlay	2/8/2010
510	7680	Primrose Ln	Larkspur Dr	Carnation Dr	6	AC	E	2	1,250	33	39,105	77	49	22	29	1/8/2026	New Construction - Initial	1/1/1980
511	7690	Prince Cir	Ambassador Dr	End	6	AC	E	2	200	33	8,235	81	22	78	0	2/2/2026	2" Conventional Overlay	4/21/2016
512	7700	Princeton Ave	Winthrop St	End	1	AC	E	2	561	32	20,161	71	72	28	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
512	7710	Princeton Ave	University St	Winthrop St	1	AC	E	2	1,285	34	42,735	75	69	31	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
513	7720	Purdue Ave	Claremont St	University St	1	AC	E	2	511	33	16,859	59	90	10	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
514	7730	Purdy St	Oasis Ave	End	4	AC	E	2	500	33	16,318	91	0	100	0	1/19/2026	Cold Mill and Overlay	10/20/2008
514	7740	Purdy St	Bolsa Av	Elvira Av	5	AC	E	2	800	33	24,836	100	0	0	0	1/14/2026	New Construction - Initial	1/1/1980
514	7750	Purdy St	Hazard Av	Jennrich Av	4	AC	E	2	1,100	33	34,849	65	4	33	63	1/20/2026	New Construction - Initial	1/1/1980
514	7760	Purdy St	Thorpe Av	End	5	AC	E	2	1,200	36	42,618	74	41	40	19	1/13/2026	New Construction - Initial	1/1/1980
515	7770	Pyle Cir	Moran St	End	5	AC	E	2	420	33	16,520	86	0	100	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
516	7780	Quartz St	Palos Verde Av	Edinger Av	5	AC	E	2	1,385	33	43,172	87	29	66	5	1/7/2026	New Construction - Initial	1/1/1980
516	7790	Quartz St	Edinger Av	Brooke Av	1	AC	E	2	705	36	25,320	76	0	100	0	1/5/2026	Cement Treated Base	9/30/2015
516	7795	Quartz St	Brooke Av	End	1	AC	E	2	483	33	17,616	76	16	84	0	1/6/2026	Cement Treated Base	9/30/2015
517	7800	Queen Cir	Parliament Av	End	6	AC	E	2	250	33	8,501	91	0	93	7	2/2/2026	2" Conventional Overlay	4/21/2016
518	7810	Queensborough St	Melric Av	Cunningham Av	6	AC	E	2	750	35	23,542	100	0	0	0	1/21/2026	New Construction - Initial	1/1/1980
519	7820	Quincy Cir	Milan Av	End	1	AC	E	2	311	33	11,853	59	83	17	0	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
520	7830	Radcliff Cir	Queensborough St	End	6	AC	E	2	200	33	8,454	100	0	0	0	1/21/2026	New Construction - Initial	1/1/1980
521	7840	Rainier Cir	Bestel Av	End	2	AC	E	2	393	33	14,917	93	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
522	7850	Ralph Ln	Sowell Av	Santee Av	2	AC	E	2	658	34	21,863	74	43	57	0	1/13/2026	New Construction - Initial	1/1/1980
524	7860	Rathburn Ave	Padres Av	End	5	AC	E	2	300	33	9,359	76	0	42	58	1/19/2026	New Construction - Initial	1/1/1980
524	7870	Rathburn Ave	Purdy St	Neece St	5	AC	E	2	900	33	30,600	65	13	35	52	1/19/2026	New Construction - Initial	1/1/1980
525	13000	Reading Ave	Bushard St	End (W)	4	AAC	E	2	200	33	9,121	93	0	23	77	1/21/2026	Surface Treatment - Slurry Seal	4/28/2014
525	7880	Reading Ave	Goebel Ln	End	4	AAC	E	2	1,050	33	37,958	84	14	86	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
526	7890	Redlands St	Carnegie Av	Furman Av	5	AAC	E	2	800	37	31,789	93	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
527	7900	Revere Dr	Hazard Av	Williamsburg Av	5	AAC	E	2	450	33	14,656	95	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
528	7910	Riata St	Jennrich Ave	End	4	AAC	E	2	300	34	12,525	94	0	100	0	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
528	7920	Riata St	Marion Ave	Miami Ave	4	AC	E	2	400	33	13,328	83	17	83	0	1/20/2026	New Construction - Initial	1/1/1980
528	7930	Riata St	Oasis Ave	End	4	AC	E	2	500	33	16,949	84	40	60	0	1/19/2026	Cold Mill and Overlay	10/20/2008
529	7940	Richardson Wy	24th St	Trask Av	4	AAC	E	2	468	34	14,719	89	0	100	0	1/5/2026	Overlay - AC Structural	1/1/2020
529	7950	Richardson Wy	21st St	19th St	4	AC	E	2	473	32	16,731	84	63	29	8	1/6/2026	New Construction - Initial	1/1/1980
529	7960	Richardson Wy	21st St	24th St	4	AC	E	2	750	33	24,472	95	88	12	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
530	7970	Rio Grande St	Marion Av	Miami Av	4	AC	E	2	400	33	12,073	77	10	90	0	1/20/2026	New Construction - Initial	1/1/1980
531	7980	Riverton Cir	Jennrich Av	End	4	AC	E	2	300	33	12,458	87	0	100	0	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
531	7990	Riverton Cir	Oasis Av	End	4	AC	E	2	500	33	16,784	90	26	74	0	1/19/2026	Cold Mill and Overlay	10/20/2008
532	8000	Riverton Cir	Marion Av	Hazard Av	4	AC	E	2	500	35	15,549	76	0	100	0	1/20/2026	New Construction - Initial	1/1/1980
533	8010	Robin Ave	Bushard St	Swallow Ln	6	AC	E	2	850	33	26,954	60	59	41	0	1/12/2026	New Construction - Initial	1/1/1980
534	8020	Rochelle Ave	Willow Ln	Edwards St	2	AAC	E	2	819	33	27,244	99	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
534	8030	Rochelle Ave	Hammon Pl	Milan Av	1	AC	E	2	1,117	34	37,210	72	52	46	2	12/1/2025	New Construction - Initial	1/1/1980
535	8040	Rochester St	Furman Av	End	5	AAC	E	2	600	36	21,952	95	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
536	8060	Rockmont Ave	Vassar St	Vermont St	3	AAC	E	2	1,185	33	39,870	100	0	0	0	12/10/2025	Overlay - AC Structural	9/15/2023
537	8065	Rockview Cir	Redlands St	Monroe St	5	AC	E	2	210	37	7,504	95	0	100	0	1/9/2026	New Construction - Initial	1/1/1980
537	8070	Rockview Cir	Monroe St	W End	5	AAC	E	2	510	37	19,918	93	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
537	8075	Rockview Cir	Rockview Cir	End	5	AC	E	2	96	45	5,192	82	0	41	59	1/9/2026	New Construction - Initial	1/1/1980
9650	14200	Rockwell Ave	Pacific St	Beach Blvd	3	AC	E	0	585	33	15,198	86	25	44	31	1/20/2026	New Construction - Initial	1/1/1990
9650	14210	Rockwell Ave	Cedarwood Ave	End	3	AC	E	0	326	33	12,800	90	25	61	14	1/20/2026	New Construction - Initial	1/1/1990

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
538	8080	Rondeau St	Westminster Av	End	2	AC	E	2	586	33	23,189	77	53	40	7	12/17/2025	New Construction - Initial	1/1/1980
539	8090	Rose Ln	Obsidian Dr	End	6	AC	E	2	100	33	4,859	78	0	74	26	2/2/2026	New Construction - Initial	1/1/1980
539	8100	Rose Ln	Stoneridge Av	Orchid Dr	6	AC	E	2	550	33	16,584	81	42	56	2	1/19/2026	New Construction - Initial	1/1/1980
540	8120	Ross Cir	Hell Av	End	1	AC	E	2	300	33	10,794	70	65	35	0	1/5/2026	New Construction - Initial	1/1/1980
541	8130	Rotherham Cir	Somerset St	End	1	AC	E	2	370	33	14,618	52	52	39	9	11/25/2025	New Construction - Initial	1/1/1980
542	8140	Roxanne Dr	Homer St	Ginger Ln	2	AC	E	2	743	34	25,472	76	56	44	0	12/17/2025	Cold Mill and Overlay	3/17/2011
543	543	Royal Pl	Parliament Av	Ambassador Dr	6	AC	E	2	250	33	8,885	86	15	85	0	2/2/2026	2" Conventional Overlay	4/21/2016
544	8160	Rutgers Ave	Vermont St	Lafayette St	3	AAC	E	2	432	38	17,218	85	42	58	0	12/10/2025	Overlay - AC Structural	1/1/2020
545	8170	Sabre Ln	Alcester St	End	5	AC	E	2	860	33	31,616	75	29	37	34	2/25/2026	Unknown Activity	1/1/2007
545	8180	Sabre Ln	Moran St	Bushard St	5	AC	E	2	1,150	33	36,045	81	12	86	2	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
546	8190	Saint Andrews Ave	Pensacola St	End	5	AAC	E	2	1,100	33	38,687	80	24	73	3	1/7/2026	Overlay - AC Structural	12/30/2013
547	8710	Saint George Rd	Blackpool Rd	Tufton St	1	AAC	E	2	402	30	12,828	90	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
548	8680	Saint James Pk	Bolsa Chica Rd	Baker St	1	AC	E	2	255	30	8,169	88	49	51	0	11/25/2025	Cold Mill and Overlay	2/8/2010
548	90057	Saint James Pk	Baker St	Bolsa Chica Rd	1	AC	E	2	325	30	7,495	81	14	86	0	11/25/2025	New Construction - Initial	1/1/1980
549	8690	Saint Marys Cir	University St	End	1	AC	E	2	370	33	14,028	94	0	80	20	11/19/2025	2" Conventional Overlay	4/21/2016
549	8700	Saint Marys Cir	University St	End	1	AC	E	2	537	33	19,887	95	0	100	0	11/19/2025	2" Conventional Overlay	4/21/2016
550	8200	Salem Ave	Bonnema St	End	4	AAC	E	2	400	33	16,571	84	0	100	0	1/21/2026	Surface Reconstruction - AC	9/6/2011
551	8210	San Angelo Ave	Las Solanas Av	Las Flores St	6	AAC	E	2	800	35	26,903	86	14	79	7	1/27/2026	Surface Reconstruction - AC	9/6/2011
552	8220	Sandalwood Cir	Tungwood St	City Limit	5	AAC	E	2	550	36	20,942	83	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
553	8230	Sandusky Ln	McFadden Av	End	5	AC	E	2	350	40	15,898	53	18	64	18	1/9/2026	New Construction - Initial	1/1/1980
554	8240	Santee Ave	Chestnut St	End	3	AAC	E	2	632	33	22,675	84	12	84	4	1/13/2026	Overlay - AC Structural	6/12/2013
554	8250	Santee Ave	Goldenwest St	End	2	AC	E	2	1,150	34	39,782	68	47	53	0	1/13/2026	New Construction - Initial	1/1/1980
555	8260	Sapphire Ave	Quartz St	Diamond St	5	AC	E	2	800	33	26,035	91	0	100	0	1/7/2026	New Construction - Initial	1/1/1980
556	8270	Satinwood Cir	Tungwood St	City Limit	5	AAC	E	2	600	37	22,492	82	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
557	8280	Sawston Cir	Horsham Av	End	1	AC	E	2	473	37	18,548	88	13	54	33	11/25/2025	New Construction - Initial	1/1/1980
558	8290	Schooner Ave	Ward St	Bowen St	6	AC	E	2	400	33	14,186	86	54	46	0	1/28/2026	New Construction - Initial	1/1/1980
559	8300	Sean Wy	Bushard St	End	6	AC	E	2	400	33	14,750	69	5	95	0	2/2/2026	New Construction - Initial	1/1/1980
560	8310	Seneca Dr	Iroquois Rd	Garden Grove Blvd	2	AAC	E	2	1,044	37	32,986	85	40	60	0	12/16/2025	Surface Reconstruction - AC	7/23/2010
561	8320	Sequoia dr	Siskiyou St	End	2	AC	E	2	669	33	23,955	78	24	76	0	1/2/2026	Unknown Activity	4/1/2009
562	8340	Shasta Cir	Bestel Av	End	2	AC	E	2	400	33	14,877	92	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
563	8350	Shawnee Rd	Seneca Dr	Klamath Dr	2	AC	E	2	651	33	23,186	65	54	46	0	12/16/2025	New Construction - Initial	1/1/1980
563	8360	Shawnee Rd	Iroquois Rrd	Klamath Dr	2	AC	E	2	934	34	32,926	76	50	50	0	12/16/2025	New Construction - Initial	1/1/1980
563	8370	Shawnee Rd	Seneca Dr	Edwards St	2	AC	E	2	1,003	33	33,376	68	43	44	13	12/16/2025	New Construction - Initial	1/1/1980
564	8380	Sheffield St	Hazard Av	Chesire Av	5	AAC	E	2	600	34	22,789	88	16	84	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
565	8390	Shell Cir	Ontario Dr	End	5	AC	E	2	420	33	16,385	79	10	85	5	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
566	8400	Sherwood St	Westminster Av	End	1	AAC	E	2	937	34	33,903	55	10	85	5	12/1/2025	Overlay - AC Structural	4/28/2014
567	8410	Shirley St	Dia Av	Jennrich Av	4	AAC	E	2	750	33	26,207	91	23	77	0	1/20/2026	Surface Reconstruction - AC	12/24/2010
567	8420	Shirley St	Westminster Blvd	Oasis Ave	4	AC	E	2	1,200	33	36,520	62	27	58	15	1/19/2026	New Construction - Initial	1/1/1980
568	8430	Shrewsbury Ave	Uxbridge St	Bexley St	1	AC	E	2	1,256	36	46,665	70	54	34	12	11/25/2025	New Construction - Initial	1/1/1980
569	8440	Siena Ave	Vassar St	Vermont St	3	AC	E	2	1,010	33	32,662	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
570	8450	Sinclair Ave	Magnolia St	End	5	AC	E	2	1,065	33	36,965	73	48	42	10	1/26/2026	New Construction - Initial	1/1/1980
571	8460	Sinclair Cir	Moran St	End	5	AC	E	2	420	33	16,000	80	15	85	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
572	8470	Sioux Rd	Iroquois Rd	End	2	AC	E	2	608	37	25,546	76	27	50	23	12/16/2025	New Construction - Initial	1/1/1980
572	8480	Sioux Rd	Erie Pl	Hefley St	2	AC	E	2	1,015	37	25,846	59	50	28	22	12/15/2025	New Construction - Initial	1/1/1980
572	8490	Sioux Rd	Iroquois Rd	Erie Pl	2	AC	E	2	1,086	37	41,048	75	32	68	0	12/15/2025	New Construction - Initial	1/1/1980
573	8500	Siskiyou St	Trask Av	Bestel Av	2	AC	E	2	728	33	22,735	83	30	56	14	12/17/2025	New Construction - Initial	1/1/1980
573	8510	Siskiyou St	Westpark Pl	Trask Av	2	AC	E	2	1,297	34	42,782	84	51	47	2	12/17/2025	New Construction - Initial	1/1/1980
573	8520	Siskiyou St	Bestel Av	Hood Dr	2	AC	E	2	1,031	33	33,818	76	11	34	55	12/17/2025	Unknown Activity	1/1/2008
573	8525	Siskiyou St	Hood Dr	Wheeler Av	2	AC	E	2	645	33	21,294	86	17	83	0	12/17/2025	Cold Mill and Overlay	10/20/2008
574	8530	Skylinks Cir	Palos Verde Av	End	5	AAC	E	2	200	33	7,819	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
575	8540	Sloane Ave	Baker St	End	1	AC	E	2	196	34	7,043	86	52	48	0	11/25/2025	Cold Mill and Overlay	10/20/2008
576	8550	Snow St	Hazard Av	Storm Dr	5	AAC	E	2	500	33	17,356	67	34	66	0	1/26/2026	Overlay - AC Structural	6/12/2013
577	8560	Somerset St	College St	Tatershall Ave	1	AC	E	2	480	37	18,431	54	58	41	1	11/25/2025	New Construction - Initial	1/1/1980
578	8580	Southfield Dr	Churchill Av	South End	1	AC	E	2	532	34	20,527	70	64	33	3	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
578	90056	Southfield Dr	Churchill Av	North End	1	AC	E	2	140	34	6,844	66	51	49	0	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
579	8590	Sowell Ave	Goldenwest St	Davis St	3	AAC	E	2	1,136	33	36,535	76	41	59	0	1/13/2026	Overlay - AC Structural	6/12/2013
579	8600	Sowell Ave	Goldenwest St	Santee Av	2	AC	E	2	1,213	33	40,734	75	38	42	20	1/13/2026	New Construction - Initial	1/1/1980
1055	90061	Springdale Pl	Meinhardt Rd	End	2	AC	E	2	175	33	5,671	48	54	33	13	12/15/2025	New Construction - Initial	1/1/1980
581	8670	Spruce St	Goldenwest St	Locust St	3	AC	E	2	573	33	21,616	58	62	38	0	1/13/2026	New Construction - Initial	1/1/1980
582	8720	Stahov Ave	Cedar St	End	3	AAC	E	2	760	33	28,573	94	0	100	0	12/26/2025	Overlay - AC Structural	3/25/2010

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
582	8721	Stahov Ave	Illinois St	End	3	AC	E	2	230	33	10,346	82	0	100	0	12/26/2025	New Construction - Initial	1/1/1980
583	8870	Stanyan Cir	Channing Ave	End	5	AC	E	2	120	30	5,904	91	0	49	51	1/26/2026	2" Conventional Overlay	11/2/2015
584	8730	Star Bright Cir	Bowling Green St	End	6	AC	E	2	360	34	13,151	73	0	100	0	1/27/2026	Cold Mill and Overlay	2/8/2010
585	8740	Starsia St	Jennrich Av	Hazard Av	4	AC	E	2	1,150	36	35,467	85	20	77	3	1/20/2026	Surface Treatment - Slurry Seal	1/1/2020
586	8750	Stengal St	Stern Av	End	6	AAC	E	2	320	33	13,647	82	37	63	0	1/28/2026	Surface Reconstruction - AC	9/6/2011
586	8760	Stengal St	Stern Av	End	6	AAC	E	2	550	33	19,474	84	35	50	15	1/28/2026	Surface Reconstruction - AC	9/6/2011
587	8770	Sterling Wy	Wilson St	Newland St	4	AAC	E	2	500	33	14,681	75	14	82	4	1/19/2026	Cement Treated Base	3/1/2014
588	8780	Stern Ave	Hope St	End	6	AAC	E	2	1,400	33	48,193	72	16	80	4	1/28/2026	Overlay - AC Structural	1/1/2019
589	8790	Stinson Ln	Bushard St	End	6	AAC	E	2	200	37	9,934	80	0	100	0	2/2/2026	Overlay - AC Structural	6/26/2013
589	8800	Stinson Ln	Larkspur Dr	Bushard St	6	AC	E	2	400	33	13,270	82	21	74	5	1/19/2026	New Construction - Initial	1/1/1980
590	8820	Stoneridge Ave	Magnolia St	Briarcliff St	6	AC	E	2	1,100	33	38,888	81	49	49	2	1/8/2026	New Construction - Initial	1/1/1980
591	8830	Storm Dr	Snow St	End	5	AAC	E	2	400	33	14,995	74	29	71	0	1/26/2026	Overlay - AC Structural	6/12/2013
592	8840	Strait Pl	Hazard Av	End	4	AC	E	2	550	33	20,302	83	0	94	6	1/20/2026	New Construction - Initial	1/1/1980
593	8850	Strait St	McClure Av	Jennrich Av	4	AAC	E	2	300	33	9,805	89	0	100	0	1/20/2026	Surface Reconstruction - AC	12/24/2010
594	8860	Stratford Ave	Buckingham Cir	Milan St	1	AC	E	2	685	34	24,121	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
595	8880	Suffolk St	Rancho Rd	Blackpool Rd	1	AAC	E	2	1,671	30	59,212	85	0	85	15	11/25/2025	Surface Reconstruction - AC	9/6/2011
9700	14220	Sugar Dr	Cedarwood Ave	McFadden Ave	3	AC	E	0	335	16	6,360	75	41	56	3	1/20/2026	New Construction - Initial	1/1/1990
596	8910	Summit Cir	Sequoia Dr	End	2	AC	E	2	408	33	14,456	80	9	71	20	1/2/2026	Unknown Activity	4/1/2009
597	8920	Sunnyvale Ave	Trask Av	End	4	AAC	E	2	300	33	9,515	87	0	100	0	1/6/2026	Surface Reconstruction - AC	9/6/2011
598	8930	Sunside Ave	Edwards St	Wynn St	2	AC	E	2	470	34	17,055	96	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
9000	13010	Sutherland Wy	Bushard St	End (W)	4	AC	E	2	200	33	9,333	91	0	19	81	1/21/2026	Surface Treatment - Slurry Seal	4/28/2014
599	8940	Sutter Dr	Trask Av	Tillamook Av	2	AC	E	2	350	33	13,155	84	9	91	0	1/2/2026	Cold Mill and Overlay	10/20/2008
599	8950	Sutter Dr	Klondike Av	Humboldt Av	2	AC	E	2	843	33	29,920	82	68	30	2	12/30/2025	New Construction - Initial	1/1/1980
600	8960	Sutton St	Bersuch St	Bestel Av	2	AC	E	2	1,031	33	34,771	83	11	50	39	1/2/2026	New Construction - Initial	1/1/1980
601	8970	Suzi Ln	Hoover St	End	4	AC	E	2	435	43	20,359	63	58	23	19	1/14/2026	New Construction - Initial	1/1/1980
602	8980	Swallow Ln	Bishop Pl	McFadden Av	6	AC	E	2	1,263	33	42,576	68	47	53	0	1/12/2026	New Construction - Initial	1/1/1980
603	8990	Swan St	Westminster Av	Oasis Av	4	AC	E	2	1,122	36	35,784	82	14	75	11	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
604	9000	Syracuse St	Lehigh Pl	Colgate Av	3	AC	E	2	965	36	33,691	65	64	36	0	1/20/2026	New Construction - Initial	1/1/1980
605	9010	Tahoe St	Trask Av	Tillamook Av	2	AC	E	2	327	33	13,306	86	0	77	23	12/30/2025	Cold Mill and Overlay	10/20/2008
605	9020	Tahoe St	Humboldt Av	Trask Av	2	AC	E	2	1,129	34	37,509	70	58	29	13	12/30/2025	New Construction - Initial	1/1/1980
606	9030	Tamarisk Cir	Eden St	End	5	AAC	E	2	450	33	15,399	82	0	100	0	1/7/2026	Overlay - AC Structural	12/30/2013
607	9040	Taos Pl	Apache Rd	End	2	AC	E	2	289	33	11,196	95	0	100	0	12/16/2025	Cold Mill and Overlay	3/10/2011
608	9050	Tattershall Ave	Uxbridge St	Somerset St	1	AC	E	2	1,174	37	46,692	76	25	75	0	11/25/2025	New Construction - Initial	1/1/1980
609	9060	Temple St	City Limit	Bolsa Av	3	AAC	E	2	1,221	36	44,370	87	51	49	0	1/20/2026	Overlay - AC Structural	12/30/2013
610	9070	Tennyson Ave	Fleming St	End	6	AAC	E	2	400	35	18,206	55	27	72	1	1/22/2026	Overlay - AC Structural	6/12/2013
611	9080	Teri St	Wells Rd	End	1	AC	E	2	350	33	11,866	70	52	48	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
612	9090	Texas St	Iowa St	Olive St	3	AC	E	2	160	40	6,696	98	0	100	0	1/6/2026	New Construction - Initial	1/1/1980
612	9100	Texas St	Olive St	Illinois St	3	AC	E	2	200	30	10,922	55	30	29	41	1/6/2026	New Construction - Initial	1/1/1980
613	9110	Thorpe Ave	Nantucket St	Balboa St	5	AC	E	2	200	35	9,368	84	36	64	0	1/19/2026	Cold Mill and Overlay	10/20/2008
613	9120	Thorpe Ave	Nantucket St	End	5	AC	E	2	2,100	33	70,514	75	24	40	36	1/13/2026	New Construction - Initial	1/1/1980
614	9140	Tilden St	McClure Av	End	4	AAC	E	2	200	33	6,439	90	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
614	9150	Tilden St	Hazard Av	Sabre Ln	5	AC	C	2	800	33	24,810	74	37	41	22	1/26/2026	New Construction - Initial	1/1/1980
615	9160	Tillamook Ave	Taoe St	Olympus Dr	2	AC	E	2	603	33	20,079	91	44	52	4	12/30/2025	Cold Mill and Overlay	10/20/2008
615	9170	Tillamook Ave	Sutter Dr	Edwards St	2	AC	E	2	1,141	33	37,529	86	0	97	3	1/2/2026	Cold Mill and Overlay	10/20/2008
616	9180	Timothy Ln	Tyron St	End	1	AC	E	2	500	33	18,961	78	42	58	0	1/5/2026	New Construction - Initial	1/1/1980
617	9190	Titus St	Jennrich Av	Hazard Av	4	AAC	E	2	1,150	36	36,302	90	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
618	9200	Tiverton Cir	Montgomery Dr	End	1	AAC	E	2	254	34	10,272	100	0	0	0	11/24/2025	Overlay - AC Structural	1/1/2020
619	9220	Topaz St	Emerald Av	Sapphire Av	5	AC	E	2	1,000	33	31,492	73	42	47	11	1/7/2026	New Construction - Initial	1/1/1980
620	9230	Torchwood Cir	Wilson St	End	5	AAC	E	2	750	36	27,396	90	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
621	9240	Torrington Cir	Ward St	End	6	AC	E	2	400	45	16,702	89	39	61	0	1/28/2026	New Construction - Initial	1/1/1980
622	9250	Tracy Ave	Notre Dame St	Maryknoll St	3	AC	E	2	219	33	8,460	81	46	51	3	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
624	9320	Treebark Cir	Bowling Green St	End	6	AC	E	2	360	34	13,497	70	22	78	0	1/27/2026	Cold Mill and Overlay	2/8/2010
625	9330	Trini Cir	Magnolia St	End	6	AAC	E	2	150	33	7,256	93	0	100	0	2/2/2026	Overlay - AC Structural	2/28/2022
626	9340	Tropic Dr	Snow St	End	5	AAC	E	2	400	33	14,176	66	43	56	1	1/26/2026	Overlay - AC Structural	6/12/2013
627	9350	Tryon St	Barry Pl	Timothy Ln	1	AC	E	2	350	33	12,031	75	23	60	17	1/5/2026	New Construction - Initial	1/1/1980
628	9360	Tufton St	Blackpool Rd	Saint George Rd	1	AAC	E	2	712	30	21,939	88	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
629	9370	Tulane St	Duncannon Av	End (N)	1	AC	E	2	196	33	9,563	73	3	72	25	12/2/2025	Surface Treatment - Slurry Seal	6/14/2010
629	9380	Tulane St	Duncannon Av	End (S)	1	AC	E	2	247	33	8,469	70	42	58	0	12/2/2025	Surface Treatment - Slurry Seal	6/14/2010
630	9390	Tulipwood Cir	Tungwood St	End	5	AAC	E	2	600	36	20,795	83	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
631	9400	Tungwood St	Aspenwood Av	Satinwood Cir	5	AAC	E	2	1,100	37	41,615	81	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
632	9410	Tyler Ct	Forrest Ln	End	6	AC	E	2	90	30	5,238	74	13	87	0	1/28/2026	New Construction - Initial	1/1/1980
633	9430	Universe Ave	Venus Dr	Newland St	1	AC	E	2	900	33	30,313	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
633	9440	Universe Ave	Venus Dr	Magnolia St	1	AC	E	2	1,300	33	43,277	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
634	9450	University St	Westminster Av	Shrewsbury Av	1	AC	E	2	86	44	5,412	43	69	31	0	11/25/2025	New Construction - Initial	1/1/1980
634	9460	University St	Purdue Av	Vallecito Av	1	AAC	E	2	1,105	33	33,505	44	81	19	0	11/19/2025	Surface Reconstruction - AC	8/30/2010
634	9470	University St	Westminster Av	Purdue Av	1	AC	E	2	1,325	33	44,932	66	68	32	0	11/19/2025	Unknown Activity	8/30/2008
635	9420	Uxbridge St	Shrewsbury Av	Horsham Av	1	AC	E	2	1,390	37	53,874	74	75	25	0	11/25/2025	New Construction - Initial	1/1/1980
636	9510	Vallecito Av	Winthrop St	End	1	AC	E	2	610	33	20,186	47	85	15	0	11/19/2025	New Construction - Initial	1/1/1980
636	9520	Vallecito Av	Milan Av	Winthrop St	1	AC	E	2	2,170	34	74,104	67	77	23	0	11/19/2025	New Construction - Initial	1/1/1980
637	9530	Vallecito Dr	Placer Av	Abraham Av	1	AC	E	2	1,182	34	35,364	87	0	70	30	12/1/2025	2" Conventional Overlay	4/21/2016
637	9540	Vallecito Dr	Milan Av	Placer Av	1	AC	E	2	1,231	34	43,407	85	31	69	0	12/1/2025	2" Conventional Overlay	4/21/2016
638	14230	Van Buren St	City Limit	Worthy Dr	5	AC	E	0	523	33	15,487	72	0	100	0	1/21/2026	New Construction - Initial	1/1/1990
638	9550	Van Buren St	McFadden Av	City Limit	5	AC	C	2	608	33	20,374	78	8	92	0	1/21/2026	New Construction - Initial	1/1/1980
639	9560	Van Develde Wy	Heil Av	End	1	AC	E	2	150	32	7,984	59	59	40	1	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
640	9570	Vassar St	Carlton Av	McFadden Av	3	AAC	E	2	1,146	36	42,039	100	0	0	100	12/10/2025	Overlay - AC Structural	9/15/2023
641	9580	Vauxhall Rd	Baker St	Bolsa Chica Rd (Frontage)	1	AAC	E	2	187	19	3,049	88	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
642	9590	Venus Dr	Universe Av	Heil Av	1	AC	E	2	1,516	33	47,968	71	60	35	5	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
643	9600	Vermont St	Carlton Av	Rutgers Av	3	AAC	E	2	1,059	38	39,100	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/2020
643	9610	Vermont St	Carlton Av	Sienna Av	3	AC	E	2	581	38	23,787	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
643	9611	Vermont St	McFadden Av	Rockmont Av	3	AC	E	2	170	33	6,079	100	0	0	0	12/10/2025	New Construction - Initial	1/1/1980
643	9615	Vermont St	Sienna Av	Rockmont Av	3	AAC	E	2	756	38	26,514	100	0	0	0	4/28/2026	Overlay - AC Structural	9/15/2023
644	9620	Victoria Pl	Suffolk St	Pimlico Rd	1	AC	E	2	526	30	16,566	77	28	62	10	11/25/2025	Cold Mill and Overlay	10/20/2008
644	9630	Victoria Pl	Suffolk St	Blackpool Rd	1	AC	E	2	753	27	21,120	93	35	57	8	11/25/2025	Cold Mill and Overlay	10/20/2008
645	9640	Village Wy	Maple St	End	3	AC	E	2	325	33	14,620	50	52	48	0	3/25/2026	New Construction - Initial	1/1/1980
646	9650	Villanova Cir	Carnegie Av	Furman Av	5	AAC	E	2	600	33	20,405	94	3	75	22	1/9/2026	Overlay - AC Structural	1/1/2020
647	9660	Vogel Ave	Ord Wy	Jenner St	1	AAC	E	2	300	33	11,544	57	0	100	0	1/5/2026	Surface Reconstruction - AC	9/6/2011
648	9670	Von Cir	Sabre Ln	End	5	AC	E	2	520	34	17,713	75	9	91	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
649	9680	Wakefield St	Windsor Av	Sabre Av	5	AAC	E	2	650	32	23,897	93	0	100	0	6/12/2026	Surface Reconstruction - AC	9/6/2011
649	9685	Wakefield St	Sabre Av	Cornwall Av	5	AC	E	2	85	32	5,570	59	0	100	0	6/12/2026	New Construction - Initial	6/17/2000
650	9690	Wales Cir	Halifax Av	End	6	AC	E	2	140	33	6,540	68	33	41	26	1/22/2026	New Construction - Initial	1/1/1980
651	9700	Walkers Cir	Orwell Av	End	1	AC	E	2	447	33	16,939	57	4	69	27	1/5/2026	Surface Treatment - Slurry Seal	9/6/2011
652	9720	Walt St	Edwards St	Wynn St	2	AC	E	2	495	33	17,535	94	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
652	9730	Walt St	Edwards St	Roxanne Dr	2	AC	E	2	750	34	24,445	83	42	53	5	12/17/2025	New Construction - Initial	1/1/1980
653	9740	Walter Cir	Meinhardt Rd	End	2	AAC	E	2	226	33	9,473	81	13	87	0	12/15/2025	Overlay - AC Structural	3/1/2012
654	11115	Ward St Frontage Rd	Florence Av	End	6	AC	E	2	490	35	15,136	95	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
656	9750	Warren St	Jennrich Av	Kern Av	4	AC	E	2	680	32	22,461	87	0	100	0	1/21/2026	2" Conventional Overlay	11/2/2015
656	9755	Warren St	Kern Av	S End	4	AC	E	2	290	32	11,316	86	0	100	0	1/21/2026	2" Conventional Overlay	11/2/2015
657	9760	Warwick Cir	Melric Av	End	6	AC	E	2	450	33	15,023	67	44	56	0	1/22/2026	New Construction - Initial	1/1/1980
658	9770	Washington Ave	Colleta Pl	End	5	AC	E	2	300	33	12,052	83	10	87	3	1/26/2026	Unknown Activity	1/1/2007
658	9775	Washington Ave	Colleta Pl	Givens Pl	5	AC	E	2	300	33	9,858	75	27	55	18	1/26/2026	New Construction - Initial	1/1/1980
659	9780	Watson Cir	Brooke Av	End	1	AC	E	2	250	36	10,071	75	0	88	12	1/6/2026	2" Conventional Overlay	9/30/2015
660	9790	Webber Pl	13th St	Pembroke Ln	4	AC	E	2	813	33	27,528	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
660	9800	Webber Pl	Baylor Dr	Westminster Av	4	AAC	C	2	398	33	15,486	72	6	54	40	1/14/2026	Surface Reconstruction - AC	7/23/2010
661	9810	Webster St	Natoma Av	Thorpe Av	5	AC	E	2	1,000	33	32,698	85	14	68	18	2/19/2026	New Construction - Initial	1/1/1980
662	9830	Wee Wy	Nancy Lee Dr	Paul Dr	2	AC	E	2	241	33	5,768	82	14	86	0	12/17/2025	Surface Treatment - Slurry Seal	4/28/2014
662	9840	Wee Wy	Dumont Ln	Denise Dr	2	AC	E	2	263	34	8,935	83	26	74	0	12/17/2025	Surface Treatment - Slurry Seal	4/28/2014
663	9870	Wellesley Ave	Lafayette St	Vermont St	3	AC	E	2	887	33	36,989	69	42	47	11	12/10/2025	New Construction - Initial	1/1/1980
664	9880	Wells Rd	End	End	1	AC	E	2	1,050	33	35,344	59	61	39	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
665	9890	Wembley Cir	Forrest Ln	End	6	AC	E	2	630	33	24,049	76	0	77	23	1/28/2026	New Construction - Initial	1/1/1980
1057	90064	West Dr	Bolsa Av	Mall	2	AC	E	4	230	58	9,279	80	0	52	48	12/9/2025	New Construction - Initial	1/1/1980
666	9910	Westhaven Cir	Butterfield St	End	6	AAC	E	2	750	33	27,554	80	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
669	11530	Westminster Blvd Frontage Rd	End e/o Shirley St	End w/o Shirley St	4	AC	E	2	330	27	8,602	86	29	71	0	3/30/2026	New Construction - Initial	1/1/1980
670	10090	Westmoreland Cir	Wiltshire St	End	1	AAC	E	2	492	33	17,516	79	36	64	0	11/24/2025	Overlay - AC Structural	3/1/2012
671	10100	Westpark Pl	Siskiyou St	End	2	AC	C	2	755	37	33,181	57	68	28	4	12/17/2025	New Construction - Initial	1/1/1980
671	10110	Westpark Pl	Goldenwest St	Siskiyou St	2	AC	C	2	1,119	38	44,025	68	52	42	6	12/17/2025	New Construction - Initial	1/1/1980
672	10130	Weststate St	Bishop Pl	Bolsa Av	6	AC	C	2	1,250	45	55,554	90	0	80	20	2/25/2026	New Construction - Initial	1/1/1980
673	10140	Westwood Dr	Grey Oaks St	Bushard St	6	AAC	E	2	1,100	36	42,293	80	49	50	1	1/12/2026	Surface Reconstruction - AC	9/6/2011
674	10150	Weymouth Wy	Stratford Av	Duncannon Av	1	AC	E	2	1,465	33	48,288	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
675	10160	Wheaton Cir	Vermont St	End	3	AAC	E	2	180	33	8,454	86	0	100	0	12/10/2025	Overlay - AC Structural	1/1/2020
676	10170	Wheeler Ave	Estes Cir	Siskiyou St	2	AC	E	2	518	33	15,643	86	14	86	0	12/17/2025	Cold Mill and Overlay	10/20/2008

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
677	10180	Whispering Pine Cir	Bowling Green St	Brookhurst St	6	AC	E	2	320	34	11,040	73	7	93	0	1/27/2026	Cold Mill and Overlay	2/8/2020
678	10190	White Cir	Meinhardt Rd	End	2	AC	E	2	114	34	5,715	91	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
679	10200	Whitley Ave	Newland St	Coronado St	5	AC	E	2	400	35	16,015	100	0	0	0	1/14/2026	Unknown Activity	4/1/2009
680	10210	Whitney Cir	Bestel Av	End	2	AC	E	2	423	33	15,351	90	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
681	10230	Willamette Dr	Trask Av	Tillamook Av	2	AC	E	2	360	33	12,000	88	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
681	10240	Willamette Dr	Kiowa Rd	Garden Grove Blvd (Frontage Rd)	2	AAC	E	2	837	33	27,132	65	52	48	0	1/2/2026	Overlay - AC Structural	1/1/2019
681	10250	Willamette Dr	Humboldt Av	Klondike Av	2	AC	E	2	851	33	29,129	90	0	100	0	12/17/2025	New Construction - Initial	1/1/1980
682	10260	Williamsburg Ave	Colonial Dr	End	5	AAC	E	2	750	33	32,571	92	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
706	10300	Willow Cir	Willow Ln	CDS	2	AC	E	2	214	20	6,104	69	54	46	0	12/8/2025	New Construction - AC	1/1/1980
683	10270	Willow Ln	Chinook Av	Maple St	2	AC	E	2	386	33	12,181	73	30	70	0	12/8/2025	New Construction - Initial	1/1/1980
683	10280	Willow Ln	Ebony Wy	Chinook Av	2	AC	E	2	1,206	33	37,561	75	38	62	0	12/2/2025	New Construction - Initial	1/1/1980
683	10290	Willow Ln	Westminster Av	Abraham Av	2	AAC	C	2	1,154	32	37,752	99	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
683	90062	Willow Ln	Westminster Blvd	South End	2	AC	C	2	580	37	21,860	95	0	100	0	12/17/2025	New Construction - Initial	1/1/1980
684	10310	Wilson St	Hazard Av	End	4	AC	E	2	350	33	11,001	89	21	79	0	1/19/2026	Cement Treated Base	9/30/2015
684	10320	Wilson St	McFadden Av	Devilwood Cir	5	AAC	E	2	625	33	23,218	76	43	57	0	1/9/2026	Overlay - AC Structural	1/1/2019
684	10325	Wilson St	Devilwood Cir	Aspenwood Av	5	AAC	E	2	625	33	24,217	78	10	90	0	1/9/2026	Overlay - AC Structural	1/1/2019
684	10330	Wilson St	Lomay Av	Conner Cir	4	AC	E	2	1,800	33	60,475	86	28	68	4	1/7/2026	Cold Mill and Overlay	2/1/2010
684	14240	Wilson St	McFadden Ave	Worthy Dr	5	AC	E	0	1,156	33	36,174	87	35	45	20	1/9/2026	New Construction - Initial	1/1/1990
685	10350	Wiltshire St	Lancashire Av	Camphor Av	1	AAC	E	2	641	35	24,180	72	56	44	0	11/24/2025	Overlay - AC Structural	3/1/2012
687	10360	Windsor Ave	Sheffield St	Wakefield St	5	AAC	E	2	700	33	24,100	89	0	86	14	1/27/2026	Surface Reconstruction - AC	9/6/2011
688	10380	Winthrop St	Vallecito Av	Duncannon Av	1	AC	E	2	226	32	7,076	36	85	15	0	4/28/2026	Surface Treatment - Slurry Seal	6/14/2010
688	10390	Winthrop St	Harvard Av	Cornell Av	1	AC	E	2	804	32	23,879	61	79	17	4	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
688	10400	Winthrop St	Cornell Av	Vallecito Av	1	AC	E	2	982	32	34,883	26	85	15	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
689	10410	Woodmere Cir	Candlewood St	End	6	AAC	E	2	250	36	9,182	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
690	10420	Woodruff St	Drey Rd	Wells Rd	1	AC	E	2	1,000	33	29,670	39	76	24	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
9750	14250	Worthy Dr	Worthy Dr	End	5	AC	E	0	1,344	33	43,751	87	49	42	9	1/9/2026	New Construction - Initial	1/1/1990
691	10430	Wynant St	Trask Av	End	4	AAC	E	2	300	33	9,640	88	0	100	0	1/6/2026	Surface Reconstruction - AC	9/6/2011
692	10440	Wynn St	Walt St	Sunside Av	2	AC	E	2	250	33	10,151	95	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
693	10450	Wyoming St	Arizona St	Hoover St	4	AC	C	2	827	36	29,229	90	0	18	82	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
693	10460	Wyoming St	Iowa St	Olive St	3	AC	E	2	204	36	6,538	98	0	100	0	1/6/2026	New Construction - Initial	1/1/1980
693	10465	Wyoming St	Olive St	Cherry St	3	AAC	E	2	838	33	28,916	100	0	0	0	1/6/2026	Overlay - AC Structural	7/30/2023
693	10470	Wyoming St	Cherry St	Goldenwest St	3	AAC	E	2	1,095	36	39,423	100	0	0	0	1/6/2026	Overlay - AC Structural	7/30/2023
694	10480	Xavier Cir	Colgate Av	End	3	AC	E	2	164	33	8,600	65	0	100	0	2/20/2026	New Construction - Initial	1/1/1980
695	10490	Yale Ave	Claremont St	University St	1	AC	E	2	511	33	17,205	88	19	81	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
695	10500	Yale Ave	University St	College St	1	AC	E	2	919	33	30,208	79	67	33	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
696	10510	Yankton Wy	Northwestern Wy	End	1	AC	E	2	289	37	13,836	92	0	90	10	11/19/2025	Unknown Activity	8/30/2008
697	10520	Yarborough St	Channing Av	End	5	AC	E	2	604	36	22,292	94	0	70	30	1/26/2026	2" Conventional Overlay	11/2/2015
698	10530	Yermo Wy	Colleta Pl	End	5	AC	E	2	300	33	11,736	85	0	96	4	1/26/2026	Unknown Activity	1/1/2007
699	10540	Yorkshire Cir	Nottingham Av	McFadden Av	6	AC	E	2	200	33	7,120	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
700	10550	Yosemite Dr	Trask Av	Tillamook Av	2	AC	E	2	328	33	12,561	87	0	100	0	12/30/2025	Cold Mill and Overlay	10/20/2008
700	10560	Yosemite Dr	Klondike Av	Humboldt Av	2	AC	E	2	838	33	28,918	84	0	61	39	12/30/2025	New Construction - Initial	1/1/1980
701	10570	Yuba Ave	Milan Av	Vallecito Dr	1	AC	E	2	617	34	21,057	83	0	100	0	12/1/2025	New Construction - Initial	1/1/1980
702	10580	Yuma Pl	Apache Rd	End	2	AC	E	2	282	33	11,188	94	0	90	10	12/16/2025	Cold Mill and Overlay	3/10/2011
703	10590	Zuni Pl	Apache Rd	End	2	AC	E	2	282	33	11,401	94	0	90	10	12/16/2025	Cold Mill and Overlay	3/10/2011
									127.0		23,722,970							
		Alleys																
1000	90001	Alley 01	11th St	16th St	4	PCC	O	2	1,462	15	20,232	86	46	49	5	2/26/2026	New Construction - Initial	1/1/1980
1001	90002	Alley 02	Arizona St	End	4	AC	O	2	550	20	8,483	91	21	75	4	4/1/2026	Unknown Activity	1/1/2007
1002	90003	Alley 03	Colonial Dr	End	5	AC	O	2	100	20	2,112	8	64	28	8	3/30/2026	New Construction - Initial	1/1/1980
1003	90004	Alley 04	Sherwood	End	1	AC	O	2	100	20	2,718	25	86	14	0	3/25/2026	New Construction - Initial	1/1/1980
1004	90005	Alley 05	Frances St	Hammon Pl	1	AC	O	2	300	20	6,212	92	26	74	0	2/26/2026	New Construction	1/1/1980
1005	90006	Alley 06	Pacific	Cedarwood	3	AC	O	2	1,000	20	9,687	91	57	37	6	1/20/2026	New Construction - Initial	1/1/1980
1006	90007	Alley 07	Cherry St	End	3	AC	O	2	150	20	1,890	100	0	0	0	2/19/2026	New Construction - Initial	1/1/1980
1007	90008	Alley 08	Pine	Cherry	3	AC	O	2	800	20	12,936	100	0	0	0	2/19/2026	New Construction - Initial	1/1/1980
1008	90009	Alley 09	Pegg	End	1	AC	O	2	200	15	5,680	99	0	100	0	2/26/2026	New Construction - Initial	1/1/1980
1009	90010	Alley 10	10th St	11th St	4	AC	O	2	250	15	4,660	96	0	100	0	2/26/2026	New Construction - Initial	1/1/1980
1010	90011	Alley 11	19th St	Alley 35	4	AC	O	2	407	15	4,440	93	0	61	39	2/26/2026	Unknown Activity	1/1/2007
1011	90012	Alley 12	15th St (W/ Newland)	15th St	4	AC	O	2	1,000	30	25,533	85	26	69	5	3/24/2026	Unknown Activity	1/1/2007
1012	90013	Alley 13	Arizona St	23rd St	4	AC	O	2	550	20	9,507	85	45	55	0	4/1/2026	Unknown Activity	1/1/2007
1013	90014	Alley 14	Hoover St	End	3	AAC	O	2	600	20	8,998	96	0	100	0	2/19/2026	Overlay - AC Structural	10/20/2008

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
1014	90015	Alley 15	Nevada St	Arizona St	4	AC	O	2	350	15	4,920	83	39	44	17	4/1/2026	Unknown Activity	1/1/2008
1015	90016	Alley 16	Oakcliff	Bushard St	6	AC	O	2	1,477	20	22,398	83	39	61	0	1/19/2026	Unknown Activity	1/1/2007
1016	90017	Alley 17	McFadden Ave	Carnation Dr	6	AC	O	2	750	20	12,305	74	81	13	6	1/19/2026	Unknown Activity	1/1/2007
1017	90018	Alley 18	Purdy St	End	4	AAC	O	2	650	20	11,470	92	0	100	0	2/25/2026	Surface Reconstruction - AC	12/24/2010
1018	90019	Alley 19	Magnolia St	End	5	AAC	O	2	800	20	13,723	59	88	12	0	1/19/2026	Overlay - AC Structural	10/20/2008
1020	90021	Alley 21	Moran St	Castle St	4	AAC	O	2	400	20	6,566	94	0	82	18	2/19/2026	Overlay - AC Structural	10/20/2008
1021	90022	Alley 22	Natal Dr	Natal Dr	3	AC	O	2	1,081	20	17,795	89	0	41	59	2/19/2026	New Construction - Initial	1/1/1980
1022	90023	Alley 23	Bolsa Frontage Rd	End	5	AC	O	2	550	20	8,206	58	89	11	0	1/19/2026	Cold Mill and Overlay	10/20/2008
1023	90024	Alley 24	Nola St	End	4	AAC	O	2	250	20	4,475	93	0	100	0	2/25/2026	Surface Reconstruction - AC	2/8/2010
1024	90025	Alley 25	Santee Ave	Sowell Ave	2	AAC	O	2	650	20	13,098	71	13	87	0	2/20/2026	Surface Reconstruction - AC	2/8/2010
1025	90026	Alley 26	Rochelle	End	2	AC	O	2	360	20	4,626	80	0	57	43	2/25/2026	Unknown Activity	1/1/2008
1026	90027	Alley 27	Goldenwest St	End	3	AC	O	2	600	20	12,081	17	61	39	0	3/25/2026	New Construction - Initial	1/1/1980
1027	90028	Alley 28	Sowell Ave	End	3	AC	O	2	150	20	2,059	43	94	6	0	2/20/2026	Cold Mill and Overlay	10/20/2008
1028	90029	Alley 29	Thorpe Ave	End (w/o Eden)	5	AAC	O	2	1,800	20	29,872	98	0	0	100	1/13/2026	Overlay - AC Structural	7/30/2023
1029	90030	Alley 30	Van Buren St	Van Buren St	5	AC	O	2	650	25	11,852	63	74	25	1	1/21/2026	Unknown Activity	1/1/2007
1030	90031	Alley 31	Washington Ave	Madison Ave	3	AC	O	2	600	15	6,814	96	0	65	35	2/26/2026	New Construction - Initial	1/1/1980
1031	90032	Alley 32	15th St	16th St	4	AAC	O	2	350	15	3,230	55	73	27	0	3/24/2026	Surface Reconstruction - AC	2/8/2010
1032	90033	Alley 33	19th St	20th St	4	AC	O	2	250	15	2,857	88	0	27	73	2/26/2026	Unknown Activity	1/1/2008
1033	90034	Alley 34	Jackson St	End	4	AC	O	2	161	15	2,019	29	70	28	2	3/24/2026	New Construction - Initial	1/1/1980
1034	90035	Alley 35	Beach (n/o Westminster)	Monroe St	4	AC	O	2	1,250	20	12,848	77	62	19	19	2/26/2026	Cold Mill and Overlay	10/20/2008
1035	90036	Alley 36	Dillow St (E/O)	Kramer St	5	AAC	O	2	650	20	12,488	90	55	45	0	2/25/2026	Surface Reconstruction - AC	2/8/2010
1036	90037	Alley 37	Dillow St (W/O)	Kramer St	5	AC	O	2	650	20	11,567	86	70	30	0	2/25/2026	New Construction - Initial	1/1/1980
1037	90039	Alley 39	Dana Cir	End (Parallel to Drey)	1	AAC	O	2	600	20	8,667	99	0	100	0	2/20/2026	Overlay - AC Structural	9/15/2023
1038	90040	Alley 40	La Pat Pl	Nancy Lee Dr	2	AC	O	2	750	20	15,316	85	66	13	21	2/25/2026	Cold Mill and Overlay	10/20/2008
1039	90041	Alley 41	La Pat Pl	La Pat Ct	2	AC	O	2	400	20	6,501	94	0	93	7	2/25/2026	Cold Mill and Overlay	10/20/2008
1040	90042	Alley 42	Kiowa Rd	Garden Grove Blvd Frontage Rd	2	AC	O	2	1,519	20	24,738	81	21	79	0	4/1/2026	New Construction - Initial	1/1/1980
1041	90043	Alley 43	Newland St	Westminster Ave	4	AC	O	2	700	20	11,220	47	73	27	0	3/24/2026	Unknown Activity	1/1/2007
1042	90044	Alley 44	Pegg St	Sherwood St	1	AAC	O	2	547	20	8,111	77	60	40	0	2/26/2026	Overlay - AC Structural	4/28/2014
1043	90045	Alley 45	Bushard St	Swallow Ln	6	AC	O	2	800	20	12,197	56	73	27	0	1/13/2026	New Construction - Initial	1/1/1980
1044	90046	Alley 46	Springdale St	End	2	AAC	O	2	2,200	20	35,147	69	87	13	0	2/26/2026	Surface Reconstruction - AC	5/15/2008
1045	90047	Alley 47	Meinhardt Rd	Iroquois Rd	2	AAC	O	2	1,700	20	27,999	87	30	70	0	3/25/2026	Surface Reconstruction - AC	5/15/2008
1046	90048	Alley 48	Swan St	Bushard St	4	AAC	O	2	550	20	11,167	99	0	100	0	2/19/2026	Overlay - AC Structural	9/15/2023
1047	90049	Alley 49	Westate	Bishop Pl	6	AC	O	2	1,300	20	18,292	61	73	27	0	1/14/2026	Cold Mill and Overlay	10/20/2008
1048	90050	Alley 50	Westate	Bishop Pl	6	AAC	O	2	1,300	20	15,567	63	88	12	0	1/19/2026	Surface Reconstruction - AC	9/6/2011
1049	90051	Alley 51	Willow Ln	Edwards St	2	AC	O	2	800	20	14,292	72	89	10	1	2/25/2026	Unknown Activity	1/1/2007
1050	90052	Alley 52	Arizona St	End	4	AC	O	2	300	15	3,368	84	0	96	4	4/1/2026	Unknown Activity	5/15/2008
1051	90053	Alley 53	Adams St	Washington Ave	3	AC	O	2	620	15	6,579	78	62	38	0	2/26/2026	New Construction - Initial	1/1/1980
1052	90054	Alley 54	Madison Ave	Roosevelt Ave	3	AC	O	2	600	15	5,643	65	60	40	0	2/26/2026	Unknown Activity	1/1/2007
1053	90055	Alley 55	Madison Ave	Kennedy St	5	AC	O	2	175	20	2,064	92	0	100	0	1/27/2026	Surface Treatment - Slurry Seal	1/1/2019
9100	14000	Alley N/McFadden Ave	Cedarwood Ave	Pacific St	4	AC	O	0	611	20	13,650	83	31	69	0	2/26/2026	New Construction - Initial	1/1/1990
9200	14020	Alley S/McFadden Ave	Monroe St	Wilson St	5	AC	O	0	565	20	8,026	70	68	0	32	1/9/2026	New Construction - Initial	1/1/1990
									7.2		598,901							

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
		Arterials / Collectors (MPAH)																
269	3992	Goldenwest St	Garden Grove Blvd	Natal Dr	3	AAC	A	3	629	40	23,780	44	41	59	0	4/1/2026	Surface Reconstruction - AC	9/2/2009
82	11180	Bolsa Ave	Hoover St	806' e/o Temple St (CL)	3	AC	A	2	1,293	35	65,107	47	54	40	6	3/31/2026	Patch - AC Mill / Replcae Surface	6/26/2013
269	4032	Goldenwest St	Westminster Blvd	Main St	3	AAC	A	3	1,322	40	49,205	48	38	61	1	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	3990	Goldenwest St	Natal Dr	Garden Grove Blvd	3	AC	A	3	629	40	24,418	49	41	59	0	4/1/2026	New Construction - Initial	1/1/1980
269	4012	Goldenwest St	Main St	Hazard Ave	3	AAC	A	3	1,284	40	50,624	49	50	45	5	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4060	Goldenwest St	Trask Ave	Natal Dr	3	AC	A	3	1,990	40	73,885	49	46	51	3	4/1/2026	New Construction - Initial	1/1/1980
269	4062	Goldenwest St	Natal Dr	Trask Ave	3	AAC	A	3	1,990	40	81,335	49	46	54	0	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4020	Goldenwest St	Westminster Blvd	Trask Ave	3	AC	A	3	2,600	40	99,429	50	44	36	20	3/25/2026	New Construction - Initial	1/1/1980
269	4022	Goldenwest St	Trask Ave	Westminster Blvd	3	AAC	A	3	2,600	40	109,473	52	31	64	5	4/1/2026	Surface Reconstruction - AC	9/2/2009
269	4010	Goldenwest St	Hazard Ave	Main St	3	AC	A	3	1,307	40	50,714	53	32	62	6	3/25/2026	New Construction - Initial	1/1/1980
82	1332	Bolsa Ave	405 Bridge	Hoover St	3	AC	A	2	1,725	45	79,313	54	46	50	4	3/31/2026	New Construction - Initial	1/1/1980
269	4002	Goldenwest St	Hazard Ave	Sowell Ave	3	AC	A	3	1,150	40	49,974	54	28	63	9	4/1/2026	New Construction - Initial	1/1/1980
269	4052	Goldenwest St	McFadden Ave	Georgetown Ave	3	AC	A	6	1,839	80	146,179	54	44	48	8	3/31/2026	New Construction - Initial	1/1/1980
107	10670	Bushard St	Westminster Ave	Drainage Channel	4	AAC	B	2	1,350	32	73,318	55	25	68	7	3/24/2026	Surface Reconstruction - AC	9/2/2009
82	1330	Bolsa Ave	Hoover St	405 Bridge	3	AC	A	2	1,744	43	80,364	55	42	46	12	3/31/2026	New Construction - Initial	1/1/1980
269	4030	Goldenwest St	Main St	Westminster Blvd	3	AC	A	3	1,322	40	53,891	55	39	58	3	3/25/2026	New Construction - Initial	1/1/1980
217	10740	Edinger Ave	Magnolia St	Bushard St	6	AC	A	2	2,600	34	103,856	56	47	40	13	3/30/2026	New Construction - Initial	1/1/1980
405	10901	McFadden Ave	Railroad Crossing	Goldenwest Av	3	AC	A	2	2,600	20	153,135	56	58	34	8	3/31/2026	New Construction - Initial	1/1/1980
107	10680	Bushard St	Drainage Channel	Hazard St	4	AAC	B	4	1,300	60	78,326	57	38	58	4	3/24/2026	Surface Reconstruction - AC	9/2/2009
380	10892	Magnolia Ave	Westminster Blvd (CL)	Hazard Av	4	AC	A	2	2,600	48	101,403	57	24	72	4	4/30/2026	Surface Reconstruction - PCC	10/17/2011
82	10650	Bolsa Ave	Goldenwest St	Edwards St (CL)	2	AAC	A	3	2,600	48	113,616	58	60	40	0	12/9/2025	Surface Reconstruction - AC	8/9/2011
380	10882	Magnolia Ave	Hazard Av	Bolsa Av	5	AC	A	3	2,600	48	103,968	58	40	46	14	3/31/2026	New Construction - Initial	1/1/1980
107	10690	Bushard St	Hazard St	Bolsa Ave	5	AC	B	4	2,600	62	150,818	58	41	51	8	3/30/2026	New Construction - Initial	1/1/1980
98	11430	Brookhurst St	Hazard St	Bolsa Ave	5	AAC	A	3	2,600	50	120,896	59	42	47	11	3/30/2026	Surface Reconstruction - AC	12/21/2009
668	11150	Westminster Blvd	405 Fwy Bridge	Edwards St	2	AC	A	2	1,616	40	65,495	60	64	26	10	3/25/2026	New Construction - Initial	1/1/1980
380	10880	Magnolia Ave	Bolsa Av	Hazard Av	5	AC	A	3	2,600	48	101,921	60	60	32	8	3/24/2026	New Construction - Initial	1/1/1980
269	4000	Goldenwest St	Sowell Ave	Hazard Ave	3	AC	A	3	1,150	40	45,023	61	28	56	16	3/25/2026	Unknown Activity	12/12/2008
290	10780	Hazard Ave	Goldenwest St	Hoover St	3	AC	B	4	2,600	60	156,867	61	39	52	9	3/25/2026	New Construction - Initial	1/1/1980
290	10800	Hazard Ave	Colonial Dr	Magnolia St	4	AC	B	4	1,150	62	66,822	63	37	49	14	3/30/2026	Unknown Activity	5/30/2007
219	11390	Edwards St	Westminster Ave	Sunside St	2	AAC	B	4	450	62	28,268	63	38	59	3	4/1/2026	Overlay - AC Structural	3/1/2012
290	90072	Hazard Ave	Magnolia Ave	Moran St	4	AC	B	2	1,300	50	79,808	63	46	41	13	2/25/2026	New Construction - Initial	1/1/1980
523	11240	Rancho Rd	Bolsa Chica Rd	Pavement Change	1	AC	A	2	2,400	48	132,559	64	65	35	0	11/24/2025	Unknown Activity	1/1/2007
451	10991	Newland St	McFadden Av	Bolsa Av	5	AC	A	2	2,600	30	78,941	64	46	52	2	3/24/2026	New Construction - Initial	1/1/1980
580	11260	Springdale St	22 Fwy Bridge	Cynthia Dr	2	AC	A	2	1,298	30	34,493	65	25	75	0	3/25/2026	Cement Treated Base	9/30/2015
217	10742	Edinger Ave	Bushard St	Magnolia St	6	AC	A	2	2,600	34	104,395	65	57	28	15	2/20/2026	New Construction - Initial	1/1/1980
380	10890	Magnolia Ave	Hazard Av	Westminster Av (CL)	4	AC	A	3	2,600	48	105,234	66	47	48	5	3/24/2026	New Construction - Initial	1/1/1980
290	90070	Hazard Ave	Newland Ave	Colonial Dr	4	AC	B	2	1,450	62	84,201	66	29	60	11	3/30/2026	New Construction - Initial	1/1/1980
451	10992	Newland St	Bolsa Av	McFadden Av	5	AC	A	2	2,600	30	81,892	66	50	49	1	3/24/2026	New Construction - Initial	1/1/1980
107	10722	Bushard St	City Limit	100' N/O Stenson St	6	AC	A	2	785	30	22,514	66	46	49	5	2/20/2026	New Construction - Initial	1/1/1980
580	11075	Springdale St	Cynthia Dr	Iroquois Rd	2	AC	A	2	1,352	30	38,875	66	23	72	5	3/25/2026	New Construction - Initial	1/1/1980
380	10862	Magnolia Ave	McFadden Av	Edinger Av	5	AC	A	3	2,600	48	109,065	66	34	51	15	2/20/2026	New Construction - Initial	1/1/1980
580	11072	Springdale St	Navajo Rd	Iroquois Rd	2	AC	A	2	1,858	30	55,286	67	24	74	2	3/25/2026	New Construction - Initial	1/1/1980
82	10642	Bolsa Ave	250' E/O Purdy St	Magnolia St	5	AC	A	2	1,500	40	58,630	67	74	19	7	2/26/2026	Surface Treatment - Slurry Seal	10/3/2011
290	90071	Hazard Ave	Beach Blvd	Monroe St	4	AC	B	2	1,249	62	79,744	67	22	24	54	2/26/2026	New Construction - Initial	1/1/1980
294	10830	Heil Ave	Landau Ln	Newland St	1	AC	B	2	1,350	33	44,823	67	57	41	2	1/5/2026	New Construction - Initial	1/1/1980
451	10960	Newland St	Trask Av (CL)	Westminster Av	4	AC	A	4	2,600	60	154,437	67	55	36	9	2/26/2026	New Construction - Initial	1/1/1980
580	11074	Springdale St	Iroquois Rd	Cynthia Dr	2	AC	A	2	1,322	30	41,834	68	21	79	0	3/25/2026	New Construction - Initial	1/1/1980
219	11360	Edwards St	405 Fwy (W/S)	Bolsa Ave	2	AAC	B	4	3,100	62	191,989	68	64	36	0	12/9/2025	Surface Reconstruction - AC	8/9/2011
380	10872	Magnolia Ave	Bolsa Av	McFadden Av	5	AC	A	3	2,600	48	101,936	69	36	59	5	2/26/2026	New Construction - Initial	1/1/1980
668	10010	Westminster Blvd	Hoover St	Jasperson St	4	AC	A	2	1,127	41	39,955	69	19	78	3	3/25/2026	New Construction - Initial	1/1/1980
451	10981	Newland St	Edinger Av	McFadden Av	5	AC	A	2	2,600	30	77,356	69	40	51	9	3/24/2026	New Construction - Initial	1/1/1980
107	10712	Bushard St	100' N/O Stenson St	McFadden Ave	6	AC	A	2	1,000	30	28,964	70	39	61	0	2/20/2026	New Construction - Initial	1/1/1980
82	11182	Bolsa Ave	806' e/o Temple St (CL)	Hoover St	3	AC	A	2	1,284	45	40,599	70	37	63	0	3/31/2026	New Construction - Initial	1/1/1980
380	10860	Magnolia Ave	Edinger Av	McFadden Av	5	AC	A	2	2,600	48	99,160	70	43	50	7	2/20/2026	New Construction - Initial	1/1/1980
668	11130	Westminster Blvd	Magnolia St	Newland St	4	AC	A	2	2,600	30	99,608	70	49	50	1	2/26/2026	New Construction - Initial	1/1/1980
668	11152	Westminster Blvd	Edwards St	405 Fwy Bridge	2	AC	A	2	1,655	42	63,905	70	42	56	2	3/25/2026	New Construction - Initial	1/1/1980
580	11280	Springdale St	Westminster Blvd	Chinook Av (100' s/o)	2	AC	A	2	1,780	34	69,721	71	70	30	0	12/2/2025	New Construction - Initial	1/1/1980
580	11261	Springdale St	Cynthia Dr	22 Fwy Bridge	2	AC	A	2	1,320	30	44,493	72	27	73	0	3/25/2026	Cement Treated Base	9/30/2015
107	10710	Bushard St	McFadden Ave	100' N/O Stenson St	6	AC	B	2	1,000	30	30,578	73	48	46	6	2/20/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
668	10012	Westminster Blvd	Jasperson St	Hoover St	4	AC	A	2	1,127	42	41,981	73	24	76	0	3/25/2026	Surface Reconstruction - PCC	10/17/2011
290	10790	Hazard Ave	Monroe St	Newland St	4	AC	B	4	1,351	62	73,080	73	0	100	0	2/25/2026	Unknown Activity	5/30/2007
217	10730	Edinger Ave	Newland St	Magnolia St	5	AC	A	2	2,600	40	102,102	73	54	36	10	2/20/2026	New Construction - Initial	1/1/1980
668	11168	Westminster Blvd	Springdale St	Milan St	1	AAC	A	2	2,640	42	92,333	73	62	37	1	12/1/2025	Surface Reconstruction - AC	10/3/2011
623	11200	Trask Ave	Beach Blvd	Newland St	4	AC	A	2	2,650	14	148,977	73	37	61	2	4/1/2026	Unknown Activity	12/12/2008
107	10702	Bushard St	McFadden Ave	Bolsa Ave	6	AC	A	2	2,600	30	71,582	74	27	71	2	2/20/2026	New Construction - Initial	1/1/1980
219	11370	Edwards St	Walt St	405 Fwy (E/S)	2	AAC	B	4	1,220	60	70,675	74	34	65	1	4/1/2026	Overlay - AC Structural	3/1/2012
668	10030	Westminster Blvd	Beach Blvd	Jasperson Av	4	AC	A	2	1,420	43	55,065	75	28	72	0	3/25/2026	Surface Reconstruction - PCC	10/17/2011
252	11230	Garden Grove Blvd	Melanie St	Springdale St	2	AC	A	2	1,895	50	101,710	75	45	55	0	2/9/2026	New Construction - Initial	1/1/1980
451	10982	Newland St	McFadden Av	Edinger Av	5	AC	A	2	2,600	30	77,456	75	62	38	0	3/24/2026	New Construction - Initial	1/1/1980
523	11250	Rancho Rd	Pavement Change	Westminster Av	1	AAC	A	2	2,315	32	102,112	75	67	26	7	11/24/2025	Overlay - AC Structural	5/30/2016
98	11432	Brookhurst St	Bolsa Av	Hazard St	5	AC	A	3	2,600	50	117,159	76	22	59	19	3/30/2026	New Construction - Initial	1/1/1980
580	11073	Springdale St	Iroquois Rd	Meinhardt Rd	2	AC	A	2	1,864	30	57,802	76	26	72	2	3/25/2026	New Construction - Initial	1/1/1980
380	90080	Magnolia Ave	McFadden Av	Bishop Pl	5	AC	A	3	1,350	48	50,476	76	16	82	2	2/26/2026	New Construction - Initial	1/1/1980
82	10602	Bolsa Ave	Ward St	250' E/O Ward St (CL)	6	AC	A	3	250	48	8,050	77	51	49	0	2/2/2026	New Construction - Initial	1/1/1980
82	10630	Bolsa Ave	Bushard St	Magnolia St	5	AAC	A	3	2,600	48	116,983	77	34	46	20	2/26/2026	Overlay - AC Structural	6/26/2013
252	10760	Garden Grove Blvd	Bolsa Chica Rd	Melanie St	2	AC	B	2	3,650	43	231,462	77	49	47	4	2/9/2026	New Construction - Initial	1/1/1980
290	4350	Hazard Ave	Beach Blvd	Cedarwood Ave	4	AC	B	4	1,306	54	74,695	77	8	92	0	2/26/2026	Surface Reconstruction - PCC	3/30/2011
107	10720	Bushard St	100' N/O Stenson St	Edinger Ave	6	AC	B	2	1,600	30	47,645	78	3	76	21	2/20/2026	New Construction - Initial	1/1/1980
668	11132	Westminster Blvd	Newland St	Magnolia St	4	AC	A	2	2,600	42	92,401	78	0	100	0	2/26/2026	New Construction - Initial	1/1/1980
294	11510	Heil Ave	Newland St	Beach Blvd	1	AC	B	2	2,500	55	149,736	78	36	52	12	2/20/2026	New Construction - Initial	1/1/1980
217	10732	Edinger Ave	Magnolia St	Newland St	5	AC	A	2	2,600	40	102,662	78	54	45	1	2/20/2026	New Construction - Initial	1/1/1980
380	10870	Magnolia Ave	Bishop Pl	Bolsa Av	5	AC	A	2	1,250	48	54,397	79	23	66	11	2/26/2026	New Construction - Initial	1/1/1980
668	11165	Westminster Blvd	Milan St	Springdale St	1	AC	A	2	2,640	40	102,410	79	69	31	0	11/24/2025	New Construction - Initial	1/1/1980
82	10640	Bolsa Ave	Magnolia St	428' e/o Purdy St (CL)	5	AC	A	3	1,350	40	54,724	79	33	61	6	2/26/2026	Surface Treatment - Slurry Seal	10/7/2011
82	10662	Bolsa Ave	Newland St	250' E/O Purdy St	5	AC	A	2	1,132	40	41,741	79	71	21	8	2/26/2026	Surface Treatment - Slurry Seal	10/3/2011
107	10700	Bushard St	Bolsa Ave	McFadden Ave	6	AC	B	2	2,600	30	79,143	79	0	96	4	2/20/2026	New Construction - Initial	1/1/1980
623	9270	Trask Ave	Hoover St	Chestnut St	3	AC	A	4	1,202	60	76,930	80	51	49	0	12/29/2025	Surface Treatment - Slurry Seal	10/15/2023
668	10032	Westminster Blvd	Jasperson Ave	Beach Blvd	4	AC	A	2	1,420	43	54,553	80	10	74	16	2/26/2026	New Construction - Initial	1/1/1980
219	11380	Edwards St	Sunside St	Walt St	2	AAC	B	4	278	48	13,870	80	35	63	2	4/1/2026	Overlay - AC Structural	3/1/2012
252	10770	Garden Grove Blvd	Edwards St	Goldenwest St	2	AC	B	2	2,694	50	169,403	80	46	54	0	2/9/2026	Surface Treatment - Slurry Seal	10/15/2023
580	11281	Springdale St	Chinook (100' s/o)	Westminster Blvd	2	AAC	A	2	1,780	34	75,492	80	31	62	7	12/2/2025	Surface Reconstruction - AC	10/17/2011
290	4380	Hazard Ave	Cedarwood Ave	Hoover St	4	AC	B	4	1,304	50	66,153	81	0	100	0	2/26/2026	Surface Reconstruction - PCC	11/17/2011
623	9300	Trask Ave	Siskiyou St	Edwards St	2	AC	A	4	1,420	60	85,298	81	60	40	0	12/30/2025	Surface Treatment - Slurry Seal	10/15/2023
82	10632	Bolsa Ave	Magnolia St	Bushard St	5	AAC	A	3	2,600	48	102,733	81	21	75	4	2/26/2026	Overlay - AC Structural	6/26/2013
451	10970	Newland St	Westminster Av	Hazard Av	4	AAC	A	4	2,600	60	155,606	82	33	59	8	2/25/2026	Surface Reconstruction - AC	12/18/2009
98	1670	Brookhurst St	Margo Ln	City Limit	6	AAC	A	3	620	40	23,362	82	22	78	0	3/30/2026	Overlay - AC Structural	12/30/2013
98	1622	Brookhurst St	Margo Ln	McFadden Av	6	AAC	A	3	1,200	40	52,905	82	36	64	0	3/30/2026	Overlay - AC Structural	12/30/2013
623	9280	Trask Ave	Goldenwest St	Siskiyou St	2	AC	A	4	1,173	60	67,620	83	41	59	0	12/30/2025	Surface Treatment - Slurry Seal	10/15/2023
98	1620	Brookhurst St	McFadden Ave	Margo Ln	6	AAC	A	3	1,200	40	55,492	83	14	62	24	3/30/2026	Overlay - AC Structural	12/30/2013
668	11442	Westminster Blvd	Goldenwest St	Edwards St	2	AAC	A	3	2,650	42	107,207	83	79	21	0	2/25/2026	Overlay - AC Structural	4/30/2016
290	10810	Hazard Ave	Moran St	670' E/O Bushard St	4	AC	B	4	1,960	50	117,443	84	0	80	20	2/25/2026	New Construction - Initial	1/1/1980
98	1672	Brookhurst St	City Limit	Margo Ln	6	AAC	A	3	800	40	34,737	84	21	79	0	3/30/2026	Overlay - AC Structural	12/30/2013
655	90075	Ward St	Hazard Ave	Mast Ave	6	AC	B	2	1,400	50	88,675	85	0	96	4	2/25/2026	New Construction - Initial	1/1/1980
82	10610	Bolsa Ave	Ward St	Brookhurst St	6	AC	A	3	2,600	48	105,475	85	32	46	22	1/22/2026	New Construction - Initial	1/1/1980
623	9290	Trask Ave	Chestnut St	Goldenwest St	3	AC	A	4	1,400	60	84,855	85	15	85	0	12/29/2025	Surface Treatment - Slurry Seal	10/15/2023
252	11220	Garden Grove Blvd	Springdale St	Edwards St	2	AC	A	2	1,320	50	70,112	86	36	64	0	2/9/2026	New Construction - Initial	1/1/1980
405	10902	McFadden Ave	Brookhurst St	Ward St	6	AC	A	2	2,600	30	75,339	89	0	100	0	2/20/2026	New Construction - Initial	1/1/1980
82	1350	Bolsa Ave	445' w/o Harper St (CL)	Newland St	5	AC	A	2	730	30	38,708	89	32	68	0	2/26/2026	Surface Treatment - Slurry Seal	10/3/2011
668	11440	Westminster Blvd	Edwards St	Goldenwest St	2	AAC	A	2	2,650	40	94,892	89	58	35	7	2/25/2026	Overlay - AC Structural	5/22/2017
405	10942	McFadden Ave	Beach Blvd	Newland St	5	AC	A	2	2,600	30	77,358	90	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
405	10941	McFadden Ave	1320 e/o Beach Blvd	Beach Blvd	5	AC	A	2	1,320	62	80,344	91	0	81	19	1/20/2026	New Construction - Initial	1/1/1980
82	10612	Bolsa Ave	Brookhurst St	Ward St	6	AAC	A	3	2,600	48	108,198	91	11	52	37	1/22/2026	Surface Reconstruction - AC	1/1/2019
82	11181	Bolsa Ave	365' w/o Beach Blvd (CL)	Beach Blvd	3	AC	A	2	325	45	15,969	92	0	100	0	1/21/2026	Surface Treatment - Slurry Seal	10/3/2011
82	11183	Bolsa Ave	Beach Blvd	365' w/o Beach Blvd (CL)	3	AC	A	2	305	37	9,711	92	0	100	0	1/21/2026	New Construction - Initial	1/1/1980
82	14040	Bolsa Ave	365' W/O Beach Blvd (CL)	806' E/O Temple St (CL)	3	AC	A	0	991	35	49,157	92	0	100	0	1/21/2026	New Construction - Initial	1/1/1990
82	14050	Bolsa Ave	806' E/O Temple St (CL)	365' W.O Beach Blvd (CL)	3	AC	A	0	991	42	31,249	92	0	100	0	1/21/2026	New Construction - Initial	1/1/1990
655	11090	Ward St	Mast Ave	Bolsa Av	6	AC	A	2	1,200	32	72,994	94	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
405	10900	McFadden Ave	Ward St	Brookhurst St	6	AC	A	2	2,600	30	75,853	94	0	100	0	2/20/2026	New Construction - Initial	1/1/1980
451	10980	Newland St	Edinger Av	405 Fwy Bridge	1	AC	A	2	1,100	60	53,327	94	0	6	94	12/10/2025	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
405	10932	McFadden Ave	Newland St	Magnolia St	5	AC	A	2	2,600	30	71,541	94	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
655	90077	Ward St	Bolsa Ave	Melric Ave	6	AC	A	2	1,150	62	71,729	96	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
405	10920	McFadden Ave	Bushard St	Magnolia St	6	AC	A	2	2,600	30	65,435	96	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
405	10930	McFadden Ave	Magnolia St	Newland St	5	AC	A	2	2,600	30	87,055	96	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
405	10940	McFadden Ave	Newland St	Beach Blvd	5	AC	A	2	2,600	30	77,758	96	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
290	11480	Hazard Ave	Brookhurst St	Kerry St	5	AC	B	2	1,240	52	75,279	96	0	100	0	2/25/2026	New Construction - Initial	1/1/1980
405	10922	McFadden Ave	Magnolia St	Bushard St	6	AC	A	2	2,600	30	88,249	96	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
668	11140	Westminster Blvd	Newland St	Beach Blvd	4	AAC	A	3	2,600	42	92,916	96	62	38	0	1/7/2026	Overlay - AC Structural	6/1/2020
269	3980	Goldenwest St	Georgetown Ave	Bolsa Ave	3	AC	A	3	700	40	33,113	97	100	0	0	12/9/2025	New Construction - Initial	1/1/1980
290	90073	Hazard Ave	Brookhurst St	Archway Rd	6	AAC	B	2	995	52	59,104	98	0	100	0	2/25/2026	Overlay - AC Structural	6/30/2023
655	11100	Ward St	Melric Av	McFadden Av	6	AC	A	4	1,450	62	81,788	98	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
219	11400	Edwards St	Bestel St	Trask Ave	2	AC	B	4	660	62	44,184	98	0	100	0	12/23/2025	Surface Treatment - Slurry Seal	10/15/2023
655	11110	Ward St	McFadden Av	City Limit	6	AC	A	4	1,965	32	117,645	98	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
269	11352	Goldenwest St	Bolsa Ave	405 Fwy (S/S)	3	AC	A	2	450	40	23,685	98	0	100	0	12/9/2025	New Construction - Initial	1/1/1980
668	11142	Westminster Blvd	Beach Blvd	Newland St	4	AAC	A	2	2,600	40	89,290	98	92	8	0	1/7/2026	Overlay - AC Structural	6/1/2020
219	3380	Edwards St	Westminster Ave	Trask Ave	2	AC	B	4	2,635	62	155,635	99	0	100	0	12/23/2025	New Construction - Initial	1/1/1980
269	11350	Goldenwest St	405 Fwy (S/S)	Bolsa Ave	3	AC	A	3	483	40	22,886	99	0	100	0	12/9/2025	Unknown Activity	12/12/2008
290	90074	Hazard Ave	Archway Dr	Ward St	6	AAC	B	4	1,575	52	94,909	99	0	100	0	2/25/2026	Overlay - AC Structural	6/30/2023
269	3982	Goldenwest St	Bolsa Av	Georgetown Av	3	AC	A	3	700	40	27,514	99	0	100	0	12/9/2025	New Construction - Initial	1/1/1980
451	10990	Newland St	405 Fwy Bridge	Heil Av	1	AC	A	2	1,200	55	56,652	99	0	100	0	12/10/2025	New Construction - Initial	1/1/1980
217	11490	Edinger Ave	Newland St	405 Fwy (S/S)	5	AC	A	2	1,280	40	47,893	100	0	100	0	12/10/2025	New Construction - Initial	1/1/1980
217	11492	Edinger Ave	405 Fwy (S/S)	Newland St	5	AC	A	2	1,280	40	45,235	100	0	100	0	12/10/2025	New Construction - Initial	1/1/1980
269	11342	Goldenwest St	405 Fwy (N/S)	Sowell Ave	3	AC	A	3	560	40	23,505	100	0	100	0	12/17/2025	New Construction - Initial	1/1/1980
269	11340	Goldenwest St	Sowell Ave	405 Fwy (N/S)	3	AC	A	2	560	40	18,771	100	0	100	0	12/17/2025	Unknown Activity	12/12/2008
82	10620	Bolsa Ave	Brookhurst St	Bushard St	5	AAC	A	3	2,600	48	115,230	100	0	0	0	4/28/2026	Overlay - AC Structural	4/28/2014
82	10622	Bolsa Ave	Bushard St	Brookhurst St	5	AAC	A	3	2,600	48	117,610	100	0	0	0	4/28/2026	Overlay - AC Structural	4/28/2014
82	1340	Bolsa Ave	405 Bridge	Goldenwest St	3	AC	A	3	400	50	25,741	100	0	0	0	12/9/2025	New Construction - Initial	1/1/1980
82	1342	Bolsa Ave	Goldenwest St	405 Bridge	3	AC	A	2	431	30	14,178	100	0	0	0	12/9/2025	New Construction - Initial	1/1/1980
84	11290	Bolsa Chica Rd	Duncannon Ave	Old Bolsa Chica Rd	1	AAC	A	2	1,209	36	46,214	100	0	0	0	4/28/2026	Overlay - AC Structural	4/28/2014
84	11291	Bolsa Chica Rd	Old Bolsa Chica Rd	Duncannon Ave	1	AC	A	3	1,233	42	54,712	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	11292	Bolsa Chica Rd	Old Bolsa Chica Rd	405 Bridge	1	AAC	A	2	1,250	28	37,742	100	0	0	0	12/2/2025	Overlay - AC Structural	4/28/2014
84	11293	Bolsa Chica Rd	405 Bridge	Old Bolsa Chica Rd	1	AC	A	2	1,259	35	49,294	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
84	11294	Bolsa Chica Rd	405 Bridge	22 Bridge	2	AAC	A	3	320	44	13,870	100	0	0	0	12/2/2025	Overlay - AC Structural	4/28/2014
84	11295	Bolsa Chica Rd	22 Bridge	405 Bridge	2	AC	A	2	284	38	13,184	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
84	1420	Bolsa Chica Rd	Westminster Blvd	Loyola Ave	1	AC	A	3	1,103	43	43,742	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1421	Bolsa Chica Rd	Loyola Ave	Westminster Blvd	1	AC	A	3	1,103	43	55,249	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	1450	Bolsa Chica Rd	Rancho Rd	Hampton Ct	1	AC	A	3	1,539	47	69,105	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1451	Bolsa Chica Rd	Hampton Ct	Rancho Rd	1	AC	A	3	1,539	47	72,529	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	1460	Bolsa Chica Rd	Loyola Ave	Duncannon Ave	1	AC	A	3	1,566	46	57,852	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1461	Bolsa Chica Rd	Duncannon Ave	Loyola Ave	1	AC	A	3	1,566	46	59,168	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
84	1470	Bolsa Chica Rd	Hampton Ct	Westminster Blvd	1	AC	A	3	1,706	47	77,434	100	0	0	0	4/28/2026	Overlay - AC Structural	3/31/2011
84	1471	Bolsa Chica Rd	Westminster Blvd	Hampton Ct	1	AC	A	3	1,706	47	69,631	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1630	Brookhurst St	Bishop Pl	McFadden Ave	6	AC	A	3	1,320	40	62,930	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1632	Brookhurst St	McFadden Av	Bishop Pl	6	AC	A	3	1,320	40	59,831	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1660	Brookhurst St	Bolsa Ave	Bishop Pl	6	AC	A	3	1,320	40	58,101	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
98	1662	Brookhurst St	Bishop Pl	Bolsa Av	6	AC	A	3	1,320	40	58,118	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
219	11410	Edwards St	Shawnee Rd	Bestel St	2	AC	B	4	1,100	62	64,559	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
219	11420	Edwards St	Garden Grove Blvd	Shawnee Rd	2	AC	B	4	850	62	52,440	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
252	11210	Garden Grove Blvd	Goldenwest St	Hoover St	3	AC	A	3	2,665	42	109,375	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
252	11211	Garden Grove Blvd	Hoover St	Goldenwest St	3	AC	A	3	2,668	42	111,865	100	0	0	0	1/2/2026	Surface Treatment - Slurry Seal	10/15/2023
252	3770	Garden Grove Blvd	Hoover St	City Limit	3	AC	B	3	1,320	42	50,166	100	0	0	0	1/5/2026	Surface Treatment - Slurry Seal	10/15/2023
252	3771	Garden Grove Blvd	City Limit	Hoover St	3	AC	B	3	1,320	42	59,016	100	0	0	0	1/5/2026	Surface Treatment - Slurry Seal	10/15/2023
299	11300	Hoover St	Hazard Ave	Bolsa Ave	3	AC	B	4	2,600	62	142,030	100	0	0	0	1/7/2026	New Construction - Initial	1/1/1980
299	11310	Hoover St	Garden Grove Blvd	Trask Ave	3	AC	B	4	2,630	62	142,103	100	0	0	0	1/5/2026	New Construction - Initial	1/1/1980
299	11330	Hoover St	Westminster Ave	Hazard St	3	AC	B	4	2,550	62	147,163	100	0	0	0	1/5/2026	Unknown Activity	3/30/2007
299	4530	Hoover St	21st St	Trask Ave	3	AC	B	4	1,267	62	71,117	100	0	0	0	12/29/2025	Unknown Activity	3/30/2007
299	4540	Hoover St	Westminster Ave	21st St	3	AC	B	4	1,269	62	68,799	100	0	0	0	1/5/2026	Unknown Activity	3/30/2007
380	10850	Magnolia Ave	405 Fwy (CL)	Heil Ave	1	AC	A	3	891	35	35,871	100	0	0	0	2/2/2026	Unknown Activity	12/12/2008
380	10851	Magnolia Ave	Heil Ave	405 Fwy (CL)	1	AC	A	3	866	35	29,585	100	0	0	0	2/2/2026	New Construction - Initial	1/1/1980
380	10852	Magnolia Ave	Heil Ave	Universe Ave	1	AC	A	3	1,195	40	42,862	100	0	0	0	2/2/2026	Unknown Activity	12/12/2008

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
380	10853	Magnolia Ave	Universe Ave	Heil Ave	1	AC	A	3	1,195	40	49,282	100	0	0	0	2/2/2026	New Construction - Initial	1/1/1980
380	10854	Magnolia Ave	Universe Ave	Edinger Av	6	AC	A	3	1,443	40	57,084	100	0	0	0	2/2/2026	Unknown Activity	12/12/2008
380	10855	Magnolia Ave	Edinger Ave	Universe Ave	1	AC	A	3	1,456	40	55,485	100	0	0	0	2/2/2026	New Construction - Initial	1/1/1980
405	10910	McFadden Ave	Brookhurst St	Bushard St	6	AC	A	2	2,600	30	81,716	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
405	10912	McFadden Ave	Bushard St	Brookhurst St	6	AC	A	2	2,600	30	73,932	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
580	11070	Springdale St	405 Fwy Bridge	Navajo Rd	2	AC	A	2	626	30	18,424	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
580	11071	Springdale St	Meinhardt Rd	405 Fwy Bridge	2	AC	A	2	603	30	17,788	100	0	0	0	12/2/2025	New Construction - Initial	1/1/1980
580	11270	Springdale St	405 Fwy Off-Ramp	Westminster Blvd	2	AC	A	2	592	32	22,708	100	0	0	0	12/2/2025	Cement Treated Base	3/1/2012
580	11271	Springdale St	Westminster Blvd	405 Fwy Off-Ramp	2	AC	A	2	560	32	14,635	100	0	0	0	12/2/2025	Cement Treated Base	3/1/2012
623	9260	Trask Ave	Arizona St	Hoover St	4	AC	A	4	862	60	54,186	100	0	0	0	1/5/2026	New Construction - Initial	1/1/1980
623	9310	Trask Ave	Beach Blvd	Arizona St	4	AC	A	4	1,657	60	104,216	100	0	0	0	1/5/2026	New Construction - Initial	1/1/1980
668	11120	Westminster Blvd	Bushard St	Magnolia St	4	AAC	A	2	2,600	30	97,139	100	0	0	0	1/21/2026	Overlay - AC Structural	10/30/2022
668	11122	Westminster Blvd	Magnolia St	Bushard St	4	AAC	A	2	2,600	42	95,560	100	0	0	0	1/21/2026	Overlay - AC Structural	10/30/2022
668	11160	Westminster Blvd	Bolsa Chica Rd	Milan St	1	AC	A	2	2,828	40	97,237	100	0	0	0	11/24/2025	New Construction - Initial	1/1/1980
668	11162	Westminster Blvd	Milan St	Bolsa Chica Rd	1	AAC	A	2	2,828	42	95,935	100	0	0	0	11/24/2025	Surface Reconstruction - AC	10/3/2011
668	11166	Westminster Blvd	Springdale St	405 Fwy Bridge	2	AC	A	2	630	40	28,046	100	0	0	0	11/24/2025	New Construction - Initial	1/1/1980
668	11167	Westminster Blvd	405 Fwy Bridge	Springdale St	2	AC	A	3	630	42	29,631	100	0	0	0	11/24/2025	New Construction - Initial	1/1/1980
668	11460	Westminster Blvd	Goldenwest St	Hoover St	3	AC	A	2	2,680	40	90,070	100	0	0	0	1/6/2026	New Construction - Initial	1/1/1980
668	11462	Westminster Blvd	Hoover St	Goldenwest St	3	AC	A	2	2,680	42	97,722	100	0	0	0	1/6/2026	New Construction - Initial	1/1/1980
									63.4		14,516,980							
		Locals																
688	10400	Winthrop St	Cornell Av	Vallecito Av	1	AC	E	2	982	32	34,883	26	85	15	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
688	10380	Winthrop St	Vallecito Av	Duncannon Av	1	AC	E	2	226	32	7,076	36	85	15	0	4/28/2026	Surface Treatment - Slurry Seal	6/14/2010
73	1170	Bexley St	Shrewsbury Ave	Somerset St	1	AC	E	2	221	37	10,250	37	78	21	1	11/25/2025	New Construction - Initial	1/1/1980
690	10420	Woodruff St	Drey Rd	Wells Rd	1	AC	E	2	1,000	33	29,670	39	76	24	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
78	1230	Bishop St	Swallow Ln	Bushard St	6	AC	C	2	800	32	26,701	42	92	8	0	2/19/2026	New Construction - Initial	1/1/1980
158	2540	College St	Westminster Ave	Somerset St	1	AC	E	2	270	47	11,538	43	69	31	0	11/25/2025	New Construction - Initial	1/1/1980
634	9450	University St	Westminster Av	Shrewsbury Av	1	AC	E	2	86	44	5,412	43	69	31	0	11/25/2025	New Construction - Initial	1/1/1980
113	1890	Cambridge Ave	Winthrop St	End	1	AC	E	2	562	32	20,499	44	89	11	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
634	9460	University St	Purdue Av	Vallecito Av	1	AAC	E	2	1,105	33	33,505	44	81	19	0	11/19/2025	Surface Reconstruction - AC	8/30/2010
374	5700	Loyola Ave	Winthrop St	Bolsa Chica Rd	1	AC	E	2	613	32	19,830	45	63	37	0	11/19/2025	Unknown Activity	8/30/2008
308	4730	Illinois St	Texas St	End	3	AC	E	2	150	30	8,609	45	0	31	69	1/6/2026	New Construction - Initial	1/1/1980
312	4820	Ipswich St	Horsham Ave	Tattershall Ave	1	AC	E	2	470	44	19,012	46	76	24	0	11/25/2025	New Construction - Initial	1/1/1980
636	9510	Vallecito Av	Winthrop St	End	1	AC	E	2	610	33	20,186	47	85	15	0	11/19/2025	New Construction - Initial	1/1/1980
106	1780	Bush St	Westminster Ave	End	1	AAC	E	2	656	30	22,745	47	13	77	10	12/1/2025	Overlay - AC Structural	4/28/2014
145	2380	Choctaw Dr	Navajo Rd	Iroquois Rd	2	AC	E	2	1,270	33	42,316	48	45	55	0	12/16/2025	New Construction - Initial	1/1/1980
477	7260	Pacific Ave	10th St	13th St	4	AC	E	2	932	40	38,688	48	56	24	20	1/14/2026	New Construction - Initial	1/1/1980
1055	90061	Springdale Pl	Meinhardt Rd	End	2	AC	E	2	175	33	5,671	48	54	33	13	12/15/2025	New Construction - Initial	1/1/1980
3	50	12th St	Pacific Ave	Beach Blvd	4	AC	E	2	606	33	18,835	48	3	29	68	1/14/2026	New Construction - Initial	1/1/1980
325	5060	Jim St	Wells Rd	End	1	AC	E	2	250	33	7,401	49	82	18	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
258	3880	Georgetown Ave	Goldenwest St	Lafayette St	3	AC	E	2	349	36	13,092	49	56	25	19	12/9/2025	New Construction - Initial	1/1/1980
645	9640	Village Wy	Maple St	End	3	AC	E	2	325	33	14,620	50	52	48	0	3/25/2026	New Construction - Initial	1/1/1980
158	2550	College St	Westminster Ave	Harvard Ave	1	AC	E	2	586	33	18,302	50	82	18	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
171	2710	Cornwall Ave	Wakefield St	Bromley St	5	AAC	E	2	1,050	33	33,689	51	42	58	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
228	3500	Enfield Cir	Horsham Ave	End	1	AC	E	2	694	37	28,190	51	86	14	0	11/25/2025	New Construction - Initial	1/1/1980
67	1070	Berkeley Ave	Winthrop St	End	1	AC	E	2	557	32	20,078	51	84	16	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
113	1900	Cambridge Ave	University St	Winthrop St	1	AC	E	2	1,272	32	45,733	51	87	13	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
7	150	15th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	608	36	21,876	52	0	23	77	1/14/2026	New Construction - Initial	1/1/1980
541	8130	Rotherham Cir	Somerset St	End	1	AC	E	2	370	33	14,618	52	52	39	9	11/25/2025	New Construction - Initial	1/1/1980
294	11500	Heil Ave	Venus Dr	Magnolia St	1	AC	E	2	700	32	17,990	53	63	37	0	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
553	8230	Sandusky Ln	McFadden Av	End	5	AC	E	2	350	40	15,898	53	18	64	18	1/9/2026	New Construction - Initial	1/1/1980
459	6900	Oak Pl	Placer Av	End	1	AC	E	2	142	58	7,092	53	44	56	0	12/1/2025	New Construction - Initial	1/1/1980
85	10645	Bolsa Ave Frontage Rd	Alley 23	Purdy St	5	AC	E	2	960	29	26,197	54	20	37	43	1/19/2026	New Construction - Initial	1/1/1980
420	6290	Milan Ave	Westminster Av	Alfred Av	1	AC	E	2	1,234	33	32,995	54	26	62	12	12/1/2025	New Construction - Initial	1/1/1980
70	1141	Bestal Ave	Illinois St	End	3	AC	E	2	235	33	10,811	54	6	82	12	12/26/2025	New Construction - Initial	1/1/1980
386	5910	Maple St	Willow Ln	Old Edwards St	2	AC	C	2	955	30	36,431	54	20	41	39	12/9/2025	New Construction - Initial	1/1/1980
577	8560	Somerset St	College St	Tattershall Ave	1	AC	E	2	480	37	18,431	54	58	41	1	11/25/2025	New Construction - Initial	1/1/1980
206	3100	Drey Rd	Dana Cir	Jody Cir	1	AC	E	2	550	33	19,107	54	81	19	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
492	7460	Pegg St	Westminster Av	End	1	AAC	E	2	407	36	13,788	54	0	100	0	12/1/2025	Overlay - AC Structural	4/28/2014
610	9070	Tennyson Ave	Fleming St	End	6	AAC	E	2	400	35	18,206	55	27	72	1	1/22/2026	Overlay - AC Structural	6/12/2013

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
415	6210	Mesa Cir	Monticello Cir	End	4	AC	E	2	150	33	7,185	55	0	86	14	1/19/2026	Unknown Activity	6/14/2010
484	7385	Parkview Ave	Ward St	Petsworth Ln	6	AC	E	2	660	36	21,737	55	26	38	36	1/28/2026	New Construction - Initial	1/1/1980
509	7670	Premier Ave	Forrest Ln	Brookhurst St	6	AC	E	2	800	37	29,313	55	30	70	0	1/27/2026	Cold Mill and Overlay	2/8/2010
612	9100	Texas St	Olive St	Illinois St	3	AC	E	2	200	30	10,922	55	30	29	41	1/6/2026	New Construction - Initial	1/1/1980
566	8400	Sherwood St	Westminster Av	End	1	AAC	E	2	937	34	33,903	55	10	85	5	12/1/2025	Overlay - AC Structural	4/28/2014
323	5010	Jenner St	Vogel Av	Orwell Av	1	AAC	E	2	900	33	31,503	56	22	78	0	1/5/2026	Surface Reconstruction - AC	9/6/2011
140	2270	Chestnut St	Maple St	Main St	3	AC	C	2	665	56	33,444	57	7	36	57	1/13/2026	New Construction - Initial	1/1/1980
289	4330	Harvard Ave	Winthrop St	End	1	AC	E	2	617	33	20,909	57	84	16	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
293	4430	Hefley St	Sioux Rd	Milton Ave	2	AC	E	2	1,257	33	42,085	57	57	27	16	12/15/2025	New Construction - Initial	1/1/1980
253	10245	Garden Grove Blvd (Frontage Rd)	Williamette St	La Pata St	2	AAC	E	2	550	30	18,081	57	58	41	1	1/2/2026	Overlay - AC Structural	1/1/2019
450	6770	Newcastle Ave	Kent St	Brookhurst St	5	AAC	E	2	879	37	33,849	57	10	90	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
198	3020	Dillow St	Bolsa Ave	Kramer Ave	5	AC	E	2	777	37	27,614	57	66	34	0	1/27/2026	New Construction - Initial	1/1/1980
343	5260	Kiowa Rd	Edwards St	Williamette St	2	AC	E	2	1,044	33	35,337	57	55	45	0	1/2/2026	New Construction - Initial	1/1/1980
651	9700	Walkers Cir	Orwell Av	End	1	AC	E	2	447	33	16,939	57	4	69	27	1/5/2026	Surface Treatment - Slurry Seal	9/6/2011
671	10100	Westpark Pl	Siskiyou St	End	2	AC	C	2	755	37	33,181	57	68	28	4	12/17/2025	New Construction - Initial	1/1/1980
219	3290	Edwards St	Edwards St	Maple Ave	2	AC	E	2	580	40	26,003	57	17	40	43	12/9/2025	Unknown Activity	5/15/2008
647	9660	Vogel Ave	Ord Wy	Jenner St	1	AAC	E	2	300	33	11,544	57	0	100	0	1/5/2026	Surface Reconstruction - AC	9/6/2011
181	2825	Dalton Cir	Oakcliff Dr	E End	6	AC	E	2	115	32	5,701	58	56	44	0	1/14/2026	New Construction - AC	1/1/1980
375	5720	Lunar St	Universe Av	End	1	AC	E	2	500	33	17,893	58	53	37	10	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
581	8670	Spruce St	Goldenwest St	Locust St	3	AC	E	2	573	33	21,616	58	62	38	0	1/13/2026	New Construction - Initial	1/1/1980
319	4940	Jane St	Barber St	Hammon Pl	1	AC	E	2	600	30	18,091	58	42	30	28	11/24/2025	New Construction - Initial	1/1/1980
470	7120	Ord Wy	Edinger Av	Vogel Av	1	AAC	E	2	100	33	5,544	58	0	100	0	1/5/2026	Surface Reconstruction - AC	9/6/2011
392	5980	Mariner Ln	Melrose Cir	Middleton Ln	4	AC	E	2	350	37	12,116	58	61	34	5	1/19/2026	Unknown Activity	6/14/2010
519	7820	Quincy Cir	Milan Av	End	1	AC	E	2	311	33	11,853	59	83	17	0	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
639	9560	Van Develde Wy	Heil Av	End	1	AC	E	2	150	32	7,984	59	59	40	1	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
6	130	14th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	615	36	21,590	59	36	28	36	1/14/2026	New Construction - Initial	1/1/1980
513	7720	Purdue Ave	Claremont St	University St	1	AC	E	2	511	33	16,859	59	90	10	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
572	8480	Sioux Rd	Erie Pl	Hefley St	2	AC	E	2	1,015	37	25,846	59	50	28	22	12/15/2025	New Construction - Initial	1/1/1980
649	9685	Wakefield St	Sabre Av	Cornwall Av	5	AC	E	2	85	32	5,570	59	0	100	0	6/12/2026	New Construction - Initial	6/17/2000
377	5740	Macon Cir	Monticello Cir	End	4	AC	E	2	200	33	8,273	59	0	83	17	1/19/2026	Unknown Activity	6/14/2010
352	5420	Lafayette St	Rutgers Av	Wellesley Av	3	AAC	E	2	579	36	24,197	59	21	27	52	12/9/2025	Overlay - AC Structural	1/1/2020
417	6230	Miami Cir	Monroe Ln	End	4	AC	E	2	550	33	19,675	59	51	49	0	1/19/2026	Unknown Activity	6/14/2010
664	9880	Wells Rd	End	End	1	AC	E	2	1,050	33	35,344	59	61	39	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
1	20	10th St	Pacific Ave	Cedarwood Ave	4	AC	E	2	674	36	23,030	60	0	97	3	1/14/2026	Unknown Activity	4/1/2009
119	1980	Cardinal Ave	Bushard St	End	6	AAC	E	2	900	33	29,945	60	55	44	1	1/12/2026	Overlay - AC Structural	6/26/2013
533	8010	Robin Ave	Bushard St	Swallow Ln	6	AC	E	2	850	33	26,954	60	59	41	0	1/12/2026	New Construction - Initial	1/1/1980
688	10390	Winthrop St	Harvard Av	Cornell Av	1	AC	E	2	804	32	23,879	61	79	17	4	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
298	4510	Hood Dr	Goldenwest St	Siskiyou St	2	AC	E	2	929	33	30,618	61	40	47	13	1/2/2026	New Construction - Initial	1/1/1980
318	4930	Jade Cir	Diamond St	End	5	AC	E	2	200	33	7,750	61	0	70	30	2/2/2026	New Construction - Initial	1/1/1980
301	4620	Horsham Ave	Uxbridge St	Ipswich St	1	AC	E	2	715	37	28,364	61	78	22	0	11/25/2025	New Construction - Initial	1/1/1980
148	2410	Citadel Cir	Clemson St	End	3	AC	E	2	137	32	8,190	61	64	36	0	2/20/2026	New Construction - Initial	1/1/1980
150	2430	Claremont St	Yale Ave	Purdue Ave	1	AC	E	2	920	33	34,067	61	74	26	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
39	740	Ash St	Springdale St	Mahogany Ave	2	AC	E	2	792	32	25,180	61	65	35	0	12/2/2025	New Construction - Initial	1/1/1980
501	7580	Pine St	Maple St	End	3	PCC	E	2	165	20	3,488	61	74	26	0	3/25/2026	New Construction - PCC	1/1/1980
6	120	14th St	Pacific Ave	Beach Blvd	4	AC	E	2	589	36	20,386	61	23	39	38	1/14/2026	New Construction - Initial	1/1/1980
435	6500	Monticello Cir	Monroe Ln	End	4	AC	E	2	650	33	23,291	61	8	84	8	1/19/2026	Unknown Activity	6/14/2010
331	5120	Judith Cir	Magnolia St	End	6	AAC	E	2	150	33	7,553	62	61	39	0	2/2/2026	Overlay - AC Structural	2/28/2022
78	1260	Bishop St	Brookhurst St	Swallow Ln	6	AC	C	2	1,723	32	64,488	62	57	43	0	1/12/2026	Cold Mill and Overlay	3/10/2011
268	3970	Goldenwest Cir	Bolsa Ave	Bolsa Ave	3	AC	E	2	1,642	45	77,923	62	78	13	9	1/20/2026	Surface Treatment - Slurry Seal	7/13/2011
338	5180	Kent St	Cornwall Av	End	5	AAC	E	2	350	34	11,796	62	19	81	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
1	10	10th St	Beach Blvd	Pacific Ave	4	AAC	E	2	598	36	22,786	62	6	68	26	1/14/2026	Overlay - AC Structural	4/1/2009
250	3740	Galaxy Dr	Heil Ave	Universe Ave	1	AC	E	2	1,200	33	35,697	62	54	46	0	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
24	530	Alta St	Harold Pl	Rancho Rd	1	AC	E	2	576	33	19,051	62	39	23	38	11/24/2025	New Construction - Initial	1/1/1980
567	8420	Shirley St	Westminster Blvd	Oasis Ave	4	AC	E	2	1,200	33	36,520	62	27	58	15	1/19/2026	New Construction - Initial	1/1/1980
142	2340	Chickasaw Dr	Navajo Rd	Iroquois Rd	2	AC	E	2	1,127	33	37,045	63	58	42	0	12/16/2025	New Construction - Initial	1/1/1980
601	8970	Suzi Ln	Hoover St	End	4	AC	E	2	435	43	20,359	63	58	23	19	1/14/2026	New Construction - Initial	1/1/1980
33	650	Apache Rd	Seneca Dr	Klamath Dr	2	AC	E	2	1,043	38	41,871	63	60	35	5	12/16/2025	New Construction - Initial	1/1/1980
283	4230	Hammon Pl	Westminster Ave	Rochelle Ave	1	AC	E	2	814	34	28,628	63	46	26	28	12/1/2025	New Construction - Initial	1/1/1980
53	920	Barber St	Harold Pl	Rancho Rd	1	AC	E	2	855	33	28,078	64	18	48	34	11/24/2025	New Construction - Initial	1/1/1980
400	6050	Mast Ave	Ward St	Hope St	6	AAC	E	2	1,450	33	45,090	64	22	78	0	1/28/2026	Overlay - AC Structural	1/1/2019

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
394	6000	Marion Cir	Monroe Ln	End	4	AC	E	2	350	33	12,213	64	5	86	9	1/19/2026	Unknown Activity	6/14/2010
413	6190	Melrose Cir	Mariner Ln	End	4	AC	E	2	250	37	12,645	64	25	72	3	1/19/2026	Unknown Activity	6/14/2010
9	220	18th St	Beach Blvd	Monroe St	4	AC	E	2	1,209	33	38,436	64	34	25	41	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
56	960	Barry Pl	Newland St	Tryon St	1	AC	E	2	450	33	15,546	64	53	34	13	1/5/2026	New Construction - Initial	1/1/1980
115	1920	Camphor Ln	Springdale St	Ebony Wy	2	AC	E	2	1,136	35	37,069	64	43	57	0	12/8/2025	New Construction - Initial	1/1/1980
373	5690	Lowell Cir	Milan St	End	1	AC	E	2	623	33	23,556	64	86	13	1	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
289	4340	Harvard Ave	University St	Winthrop St	1	AC	E	2	1,259	33	45,216	65	73	27	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
15	405	23rd St	Monroe St	Wilson St	4	AC	E	2	680	33	22,165	65	29	71	0	1/7/2026	New Construction - Initial	1/1/1980
514	7750	Purdy St	Hazard Av	Jennrich Av	4	AC	E	2	1,100	33	34,849	65	4	33	63	1/20/2026	New Construction - Initial	1/1/1980
52	910	Bannock Rd	Seneca Dr	Edwards St	2	AC	E	2	980	34	34,072	65	46	48	6	12/16/2025	New Construction - Initial	1/1/1980
524	7870	Rathburn Ave	Purdy St	Neece St	5	AC	E	2	900	33	30,600	65	13	35	52	1/19/2026	New Construction - Initial	1/1/1980
563	8350	Shawnee Rd	Seneca Dr	Klamath Dr	2	AC	E	2	651	33	23,186	65	54	46	0	12/16/2025	New Construction - Initial	1/1/1980
188	2900	De Paul St	Emerson Ave	Sienna Ave	3	AC	E	2	238	33	10,858	65	65	35	0	12/10/2025	New Construction - Initial	1/1/1980
694	10480	Xavier Cir	Colgate Av	End	3	AC	E	2	164	33	8,600	65	0	100	0	2/20/2026	New Construction - Initial	1/1/1980
477	7270	Pacific Ave	13th St	Westminster Av	4	AC	E	2	1,313	40	50,433	65	58	38	4	1/14/2026	New Construction - Initial	1/1/1980
326	5070	Jody Cir	Drey Rd	End	1	AC	E	2	750	33	27,989	65	65	35	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
681	10240	Willamette Dr	Kiowa Rd	Garden Grove Blvd (Frontage Rd)	2	AAC	E	2	837	33	27,132	65	52	48	0	1/2/2026	Overlay - AC Structural	1/1/2019
189	2920	Deanann Pl	Stern Av	North End	6	AAC	E	2	550	33	19,615	65	24	76	0	1/28/2026	Overlay - AC Structural	1/1/2019
351	5410	La Verne Cir	Milan St	End	1	AC	E	2	330	33	12,525	65	89	10	1	12/2/2026	Surface Treatment - Slurry Seal	7/13/2010
241	3630	Fleming St	Bolsa Ave	Tennyson Ave	6	AAC	E	2	450	33	18,117	65	19	77	4	1/22/2026	Overlay - AC Structural	6/12/2013
604	9000	Syracuse St	Lehigh Pl	Colgate Av	3	AC	E	2	965	36	33,691	65	64	36	0	1/20/2026	New Construction - Initial	1/1/1980
276	4140	Greenville Ave	Alcester St	Magnolia St	5	AC	E	2	900	33	30,075	66	62	23	15	1/26/2026	New Construction - Initial	1/1/1980
141	2330	Cheyenne Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	832	34	29,058	66	71	29	0	12/16/2025	New Construction - Initial	1/1/1980
315	4860	Iroquois Rd	Sprindale St	Barney St	2	AC	E	2	985	33	30,911	66	49	50	1	12/15/2025	New Construction - Initial	1/1/1980
300	4600	Hope St	Arundel Ave	Bolsa Ave	6	AAC	E	2	1,400	33	42,450	66	28	72	0	1/28/2026	Overlay - AC Structural	1/1/2019
634	9470	University St	Westminster Av	Purdue Av	1	AC	E	2	1,325	33	44,932	66	68	32	0	11/19/2025	Unknown Activity	8/30/2008
230	3520	Erie Pl	Sioux Rd	End	2	AC	E	2	193	33	8,305	66	30	38	32	12/15/2025	Unknown Activity	1/1/2007
490	7440	Peak Cir	Sequoia Dr	End	2	AC	E	2	160	33	7,730	66	0	65	35	1/2/2026	Unknown Activity	4/1/2009
578	90056	Southfield Dr	Churchill Av	North End	1	AC	E	2	140	34	6,844	66	51	49	0	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
626	9340	Tropic Dr	Snow St	End	5	AAC	E	2	400	33	14,176	66	43	56	1	1/26/2026	Overlay - AC Structural	6/12/2013
62	1020	Belgrade St	Bishop Pl	McFadden Ave	6	AAC	E	2	1,300	40	48,412	67	26	74	0	1/12/2026	Overlay - AC Structural	6/12/2013
657	9760	Warwick Cir	Melric Av	End	6	AC	E	2	450	33	15,023	67	44	56	0	1/22/2026	New Construction - Initial	1/1/1980
457	6880	Notre Dame St	McFadden Av	Tracy Av	3	AC	E	2	670	34	24,488	67	52	42	6	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
15	390	23rd St	Wilson St	Newland St	4	AC	E	2	650	33	19,144	67	20	80	0	1/7/2026	New Construction - Initial	1/1/1980
420	6280	Milan Ave	Alfred Av	Vallecito Av	1	AC	E	2	1,231	33	47,092	67	9	88	3	12/1/2025	New Construction - Initial	1/1/1980
636	9520	Vallecito Av	Milan Av	Winthrop St	1	AC	E	2	2,170	34	74,104	67	77	23	0	11/19/2025	New Construction - Initial	1/1/1980
576	8550	Snow St	Hazard Av	Storm Dr	5	AAC	E	2	500	33	17,356	67	34	66	0	1/26/2026	Overlay - AC Structural	6/12/2013
2	40	11th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	609	36	22,786	67	35	55	10	1/14/2026	New Construction - Initial	1/1/1980
111	1870	California Ave	Arizona St	Nevada St	4	AC	E	2	343	31	11,305	67	6	94	0	1/5/2026	New Construction - Initial	1/1/1980
191	2950	Denise Dr	Homer St	End	2	AC	E	2	493	33	16,355	67	75	25	0	12/17/2025	Cold Mill and Overlay	3/17/2011
347	5340	Kramer Ave	Moran St	End	5	AC	C	2	450	37	17,952	67	49	51	0	1/27/2026	2" Conventional Overlay	9/30/2015
495	7490	Pepperdine Cir	Lowell Cir	End	1	AC	E	2	354	33	13,896	67	89	11	0	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
182	2830	Dana Cir	Heil Ave	End	1	AC	E	2	850	33	28,366	67	49	51	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
8	190	16th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	607	36	21,621	68	5	54	41	1/14/2026	New Construction - Initial	1/1/1980
60	1000	Begonia St	Calendula Ave	Jonquil Ave	6	AC	E	2	660	36	22,677	68	18	82	0	1/13/2026	2" Conventional Overlay	3/25/2015
255	3850	Garnet St	Emerald Ave	Sapphire Ave	5	AC	E	2	1,000	33	31,586	68	55	44	1	1/7/2026	New Construction - Initial	1/1/1980
247	3690	Francis St	Harold Pl	Rancho Rd	1	AC	E	2	1,126	33	36,131	68	48	38	14	11/24/2025	New Construction - Initial	1/1/1980
563	8370	Shawnee Rd	Seneca Dr	Edwards St	2	AC	E	2	1,003	33	33,376	68	43	44	13	12/16/2025	New Construction - Initial	1/1/1980
173	2730	Coronet Ave	West End	East End	6	AAC	E	2	1,600	33	64,092	68	21	49	30	1/13/2026	Surface Reconstruction - AC	11/26/2008
292	4420	Heather Ct	Forrest Ln	End	6	AC	E	2	90	30	5,316	68	10	90	0	1/28/2026	New Construction - Initial	1/1/1980
147	2400	Churchill Ave	Bolsa Chica Rd	End	1	AC	E	2	770	37	30,239	68	51	47	2	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
282	4220	Halifax Ave	Ward St	Brighton St	6	AC	E	2	380	35	11,433	68	19	76	5	1/22/2026	New Construction - Initial	1/1/1980
421	6300	Milan St	Vallecito Av	Duncannon Av	1	AC	E	2	1,311	33	50,185	68	0	81	19	12/1/2025	New Construction - Initial	1/1/1980
127	2090	Cayuga Dr	Navajo Rd	Kiowa Rd	2	AC	E	2	843	33	28,406	68	62	38	0	12/16/2025	Cold Mill and Overlay	2/8/2010
368	5610	Lilac Cir	Poinsettia Wy	End	6	AC	E	2	250	33	10,360	68	52	19	29	2/2/2026	New Construction - Initial	1/1/1980
399	6040	Maryknoll St	Carlton Av	End	3	AC	E	2	1,093	33	41,591	68	36	64	0	12/10/2025	Unknown Activity	6/14/2010
401	6060	Mayberry Cir	Wellesley Av	End	3	AAC	E	2	350	33	13,829	68	55	45	0	12/10/2025	Overlay - AC Structural	1/1/2020
554	8250	Santee Ave	Goldenwest St	End	2	AC	E	2	1,150	34	39,782	68	47	53	0	1/13/2026	New Construction - Initial	1/1/1980
602	8980	Swallow Ln	Bishop Pl	McFadden Av	6	AC	E	2	1,263	33	42,576	68	47	53	0	1/12/2026	New Construction - Initial	1/1/1980
671	10110	Westpark Pl	Goldenwest St	Siskiyou St	2	AC	C	2	1,119	38	44,025	68	52	42	6	12/17/2025	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
272	4090	Graham St	Harold Pl	Rancho Rd	1	AC	E	2	320	37	14,426	68	25	42	33	11/24/2025	New Construction - Initial	1/1/1980
409	6160	Megan Ct	Forrest Ln	End	6	AC	E	2	90	30	5,279	68	10	90	0	1/28/2026	New Construction - Initial	1/1/1980
650	9690	Wales Cir	Halifax Av	End	6	AC	E	2	140	33	6,540	68	33	41	26	1/22/2026	New Construction - Initial	1/1/1980
477	7250	Pacific Ave	19th St	23rd St	4	AAC	E	2	1,345	34	44,185	68	14	82	4	1/6/2026	Overlay - AC Structural	1/30/2014
2	30	11th St	Pacific Ave	Beach Blvd	4	AC	E	2	600	36	20,774	68	28	66	6	1/14/2026	New Construction - Initial	1/1/1980
232	3540	Essex Cir	Melric Ave	End	6	AC	E	2	400	30	15,319	68	39	48	13	1/22/2026	New Construction - Initial	1/1/1980
440	6570	Nancy Lee Dr	Westminster Av	Homer St	2	AC	E	2	1,187	33	42,656	68	73	27	0	12/17/2025	New Construction - Initial	1/1/1980
706	10300	Willow Cir	Willow Ln	CDS	2	AC	E	2	214	20	6,104	69	54	46	0	12/8/2025	New Construction - AC	1/1/1980
420	6260	Milan Ave	Westminster Av	End	1	AC	E	2	890	37	32,956	69	21	79	0	11/24/2025	New Construction - Initial	1/1/1980
559	8300	Sean Wy	Bushard St	End	6	AC	E	2	400	33	14,750	69	5	95	0	2/2/2026	New Construction - Initial	1/1/1980
159	2560	Colleta Pl	Greenville Ave	Sinclair Ave	5	AC	E	2	1,150	33	38,827	69	34	62	4	1/26/2026	New Construction - Initial	1/1/1980
345	5290	Klamath Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	839	33	27,750	69	50	50	0	12/16/2025	Cold Mill and Overlay	3/10/2011
362	5530	Lawrence Ave	Quartz St	End	1	AC	E	2	750	36	30,827	69	28	72	0	1/6/2026	2" Conventional Overlay	9/30/2015
134	2190	Charleville Dr	21st St	19th St	4	AAC	E	2	634	31	20,398	69	14	86	0	1/6/2026	Overlay - AC Structural	1/30/2014
321	4980	Jasperson Wy	Benton Av	71st St	3	AC	E	2	715	34	23,632	69	40	49	11	1/2/2026	New Construction - Initial	1/1/1980
115	1930	Camphor Ln	Springdale St	Wiltshire St	1	AAC	E	2	1,140	35	40,161	69	66	34	0	11/24/2025	Overlay - AC Structural	3/1/2012
304	4670	Humboldt Ave	Siskiyou St	Edwards St	2	AC	E	2	1,400	34	44,768	69	62	38	0	12/30/2025	New Construction - Initial	1/1/1980
350	5380	La Pata St	Kiowa Rd	Garden Grove Blvd (Frontage St)	2	AAC	E	2	1,236	33	40,448	69	8	92	0	1/2/2026	Overlay - AC Structural	1/1/2019
441	6590	Nantucket St	McFadden Av	End	5	AC	E	2	750	42	25,837	69	28	53	19	1/19/2026	Cold Mill and Overlay	10/20/2008
11	260	20th Pl	Harper St	End	4	AAC	E	2	300	33	10,640	69	24	45	31	1/7/2026	Overlay - AC Structural	2/1/2010
468	7100	Opal Cir	Diamond St	End	5	AC	E	2	200	33	8,036	69	0	67	33	2/2/2026	New Construction - Initial	1/1/1980
353	5430	Lancashire Ave	Hammon Pl	Hereford St	1	AAC	E	2	873	36	31,431	69	17	83	0	11/24/2025	Overlay - AC Structural	3/1/2012
477	7240	Pacific Ave	Westminster Av	19th St	4	AAC	E	2	635	38	21,831	69	14	86	0	1/6/2026	Overlay - AC Structural	1/30/2014
663	9870	Wellesley Ave	Lafayette St	Vermont St	3	AC	E	2	887	33	36,989	69	42	47	11	12/10/2025	New Construction - Initial	1/1/1980
314	4840	Iris Cir	Calendula Ave	End	6	AC	E	2	450	33	15,873	69	0	100	0	1/13/2026	2" Conventional Overlay	3/25/2015
611	9080	Teri St	Wells Rd	End	1	AC	E	2	350	33	11,866	70	52	48	0	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
140	2290	Chestnut St	Santee Ave	Hazard Ave	3	AC	C	2	545	45	22,906	70	80	20	0	1/14/2026	New Construction - Initial	1/1/1980
266	3950	Gloucester Cir	Wiltshire St	End	1	AAC	E	2	486	33	18,076	70	47	40	13	11/24/2025	Overlay - AC Structural	3/1/2012
568	8430	Shrewsbury Ave	Uxbridge St	Bexley St	1	AC	E	2	1,256	36	46,665	70	54	34	12	11/25/2025	New Construction - Initial	1/1/1980
12	270	20th St	Cherry St	Olive St	3	AAC	E	2	752	32	25,244	70	64	31	5	1/6/2026	Overlay - AC Structural	10/20/2008
381	5800	Mahogany Ave	Springdale St	Ebony Wy	2	AC	E	2	1,112	32	36,335	70	25	75	0	12/2/2025	New Construction - Initial	1/1/1980
91	1530	Bowling Green St	Hazard Ave	Parkview Ave	6	AC	E	2	750	33	26,607	70	24	76	0	1/27/2026	New Construction - Initial	1/1/1980
93	1570	Brighton St	Melric Ave	Bolsa Ave	6	AC	E	2	800	35	28,150	70	34	43	23	1/22/2026	New Construction - Initial	1/1/1980
212	3180	Ebony Wy	Camphor Ave	Mahogany Ave	2	AC	E	2	252	33	10,600	70	7	93	0	12/8/2025	New Construction - Initial	1/1/1980
360	5510	Laura Wy	Timothy Ln	Barry Pl	1	AC	E	2	500	33	15,744	70	62	38	0	1/5/2026	New Construction - Initial	1/1/1980
438	6560	Moran St	Bolsa Av	Bishop Pl	6	AC	E	2	1,242	36	45,587	70	44	56	0	3/24/2026	New Construction - Initial	1/1/1980
389	5940	Margo Ln	Brookhurst St	Candlewood St	6	AAC	C	2	594	36	22,383	70	39	33	28	1/12/2026	Surface Reconstruction - AC	9/6/2011
411	6170	Melanie Ln	Garden Grove Blvd	Springdale St	2	AC	C	2	1,390	33	45,922	70	38	37	25	12/16/2025	New Construction - Initial	1/1/1980
180	2810	Dalewood Ln	Calendula Ave	McFadden Ave	6	AAC	E	2	295	36	12,095	70	34	65	1	1/13/2026	Surface Reconstruction - AC	11/26/2008
304	4660	Humboldt Ave	Goldenweset St	Siskiyou St	2	AC	E	2	1,202	34	36,380	70	50	50	0	12/30/2025	Cold Mill and Overlay	3/17/2011
457	6885	Notre Dame St	Tracy Av	End	3	AC	E	2	500	34	19,987	70	59	34	7	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
540	8120	Ross Cir	Heil Av	End	1	AC	E	2	300	33	10,794	70	65	35	0	1/5/2026	New Construction - Initial	1/1/1980
499	7540	Pickford St	Melric Av	Cunningham Av	6	AC	E	2	630	33	21,228	70	47	43	10	4/19/2022	Cold Mill and Overlay	2/8/2010
578	8580	Southfield Dr	Churchill Av	South End	1	AC	E	2	532	34	20,527	70	64	33	3	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
629	9380	Tulane St	Duncannon Av	End (S)	1	AC	E	2	247	33	8,469	70	42	58	0	12/2/2025	Surface Treatment - Slurry Seal	6/14/2010
129	2120	Cedarwood Ave	13th St	Hazard Ave	4	AC	E	2	1,234	33	40,490	70	41	47	12	1/14/2026	New Construction - Initial	1/1/1980
605	9020	Tahoe St	Humboldt Av	Trask Av	2	AC	E	2	1,129	34	37,509	70	58	29	13	12/30/2025	New Construction - Initial	1/1/1980
624	9320	Treebark Cir	Bowling Green St	End	6	AC	E	2	360	34	13,497	70	22	78	0	1/27/2026	Cold Mill and Overlay	2/8/2010
201	3070	Dorfsmith Dr	Iroquois Rd	Abbey Dr	2	AC	E	2	336	33	12,663	71	14	86	0	12/15/2025	New Construction - Initial	1/1/1980
213	3190	Ed Bane Cir	Lunar St	End	1	AC	E	2	200	32	7,873	71	27	58	15	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
447	6720	Nelson St	End	End	1	AC	E	2	450	33	18,531	71	14	60	26	1/6/2026	2" Conventional Overlay	9/30/2015
464	7010	Olive St	Park St	Hazard Av	3	AC	E	2	1,724	54	89,876	71	27	49	24	1/13/2026	New Construction - Initial	1/1/1980
512	7700	Princeton Ave	Winthrop St	End	1	AC	E	2	561	32	20,161	71	72	28	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
9	210	18th St	Pacific Ave	Beach Blvd	4	AAC	E	2	609	33	20,179	71	24	76	0	1/6/2026	Overlay - AC Structural	1/30/2014
96	1600	Bromley St	Chesire Ave	Newcastle Ave	5	AAC	E	2	600	32	17,917	71	20	80	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
140	2260	Chestnut St	Hazard Ave	Maple St	3	AC	C	2	582	53	30,378	71	84	16	0	1/13/2026	New Construction - Initial	1/1/1980
412	6180	Melric Ave	Ward St	End	6	AC	E	2	1,283	35	44,746	71	56	44	0	1/22/2026	New Construction - Initial	1/1/1980
483	7360	Park St	Locust St	Olive St	3	AC	E	2	1,276	43	55,483	71	33	52	15	1/13/2026	Unknown Activity	6/30/2008
642	9590	Venus Dr	Universe Av	Heil Av	1	AC	E	2	1,516	33	47,968	71	60	35	5	1/6/2026	Surface Treatment - Slurry Seal	6/14/2010
344	5280	Kipling Cir	Brooke Av	End	1	AC	E	2	600	36	22,014	71	26	74	0	1/6/2026	2" Conventional Overlay	9/30/2015

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
97	1610	Brooke Ave	Nelson St	End	1	AC	E	2	1,800	36	67,793	72	12	88	0	1/5/2026	Cement Treated Base	9/30/2015
15	400	23rd St	Beach Blvd	Monroe St	4	AC	E	2	1,228	33	43,293	72	47	26	27	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
279	4170	Grinnel Cir	Duncannon Ave	End	1	AC	E	2	327	33	12,840	72	31	46	23	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
660	9800	Webber Pl	Baylor Dr	Westminster Av	4	AAC	C	2	398	33	15,486	72	6	54	40	1/14/2026	Surface Reconstruction - AC	7/23/2010
8	200	16th St	Beach Blvd	Jackson St	4	AC	E	2	550	33	19,126	72	7	84	9	1/19/2026	New Construction - Initial	1/1/1980
189	2910	Deanann Pl	Stern Ave	South End	6	AAC	E	2	320	33	13,018	72	0	100	0	1/28/2026	Overlay - AC Structural	1/1/2019
384	5850	Malibu Cir	Middleton Ln	End	4	AC	E	2	200	36	8,355	72	28	30	42	1/19/2026	Unknown Activity	6/14/2010
685	10350	Wiltshire St	Lancashire Av	Camphor Av	1	AAC	E	2	641	35	24,180	72	56	44	0	11/24/2025	Overlay - AC Structural	3/1/2012
7	160	15th St	Beach Blvd	Jackson St	4	AC	E	2	600	33	23,069	72	13	81	6	1/19/2026	Unknown Activity	12/30/2012
396	6020	Marlowe Cir	Birmingham Dr	End	1	AC	E	2	130	32	6,919	72	19	81	0	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
397	6030	Marquette St	Yale Av	Purdue Av	1	AC	E	2	937	33	30,194	72	86	14	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
5	100	13th St	Beach Blvd	All-Ameican Way	4	AC	E	2	1,200	36	47,777	72	36	64	0	1/19/2026	Unknown Activity	1/1/2007
315	4870	Iroquois Rd	Seneca Dr	Edwards St	2	AC	E	2	1,051	34	35,354	72	40	60	0	12/16/2025	New Construction - Initial	1/1/1980
424	6330	Milton Ave	Hefley St	End	2	AAC	E	2	1,160	35	44,482	72	10	52	38	12/15/2025	Surface Reconstruction - AC	2/1/2009
534	8030	Rochelle Ave	Hammon Pl	Milan Av	1	AC	E	2	1,117	34	37,210	72	52	46	2	12/1/2025	New Construction - Initial	1/1/1980
588	8780	Stern Ave	Hope St	End	6	AAC	E	2	1,400	33	48,193	72	16	80	4	1/28/2026	Overlay - AC Structural	1/1/2019
332	5130	Judson Ave	Vassar St	End	3	AC	E	2	606	33	22,063	72	15	83	2	12/10/2025	New Construction - Initial	1/1/1980
67	1080	Berkeley Ave	University St	Winthrop St	1	AC	E	2	1,296	33	42,046	72	78	22	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
638	14230	Van Buren St	City Limit	Worthy Dr	5	AC	E	0	523	33	15,487	72	0	100	0	1/21/2026	New Construction - Initial	1/1/1990
37	720	Arvilla Pl	Wilson St	Newland St	4	AC	E	2	600	33	19,286	72	52	48	0	1/7/2026	Cold Mill and Overlay	2/1/2011
164	2620	Commonwealth Pl	Ambassador Dr	Edinger Ave	6	AC	E	2	450	36	20,071	72	56	43	1	1/8/2026	2" Conventional Overlay	4/21/2016
181	2820	Dalton Cir	Oakcliff Dr	W End	6	AC	E	2	286	33	11,036	72	35	50	15	1/14/2026	Cold Mill and Overlay	2/1/2010
248	3710	Franklin Cir	Duncannon Ave	South End	1	AC	E	2	562	33	20,091	73	31	67	2	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
570	8450	Sinclair Ave	Magnolia St	End	5	AC	E	2	1,065	33	36,965	73	48	42	10	1/26/2026	New Construction - Initial	1/1/1980
35	700	Arundel Ave	Kensington Ln	Forrest Ln	6	AC	E	2	936	33	33,557	73	18	72	10	1/28/2026	New Construction - Initial	1/1/1980
364	5560	Leeds Cir	Melric Av	End	6	AC	E	2	400	33	15,277	73	24	58	18	1/22/2026	New Construction - Initial	1/1/1980
28	570	Amherst Cir	Colgate Ave	End	3	AC	E	2	150	32	6,820	73	41	48	11	2/20/2026	New Construction - Initial	1/1/1980
52	900	Bannock Rd	Sioux Rd	Klamath Dr	2	AC	E	2	935	33	32,194	73	49	23	28	12/16/2025	New Construction - Initial	1/1/1980
453	6830	Norma Dr	Meinhardt Rd	Lee Dr	2	AC	E	2	900	33	30,412	73	7	93	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
629	9370	Tulane St	Duncannon Av	End (N)	1	AC	E	2	196	33	9,563	73	3	72	25	12/2/2025	Surface Treatment - Slurry Seal	6/14/2010
186	2880	Davis St	Sowell Ave	Santee Ave	3	AAC	E	2	582	33	20,999	73	32	68	0	1/13/2026	Overlay - AC Structural	6/12/2013
584	8730	Star Bright Cir	Bowling Green St	End	6	AC	E	2	360	34	13,151	73	0	100	0	1/27/2026	Cold Mill and Overlay	2/8/2010
144	2370	Chippewa Dr	Sioux Rd	Navajo Rd	2	AC	E	2	1,239	33	47,576	73	46	49	5	12/16/2025	New Construction - Initial	1/1/1980
157	2520	Colgate Ave	Clemson St	Xavier Cir	3	AC	E	2	787	33	28,060	73	61	39	0	1/20/2026	New Construction - Initial	1/1/1980
185	2860	Dartmouth Ave	Winthrop St	End	1	AC	E	2	567	33	19,378	73	70	30	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
286	4280	Harold Pl	Graham St	Hammon Pl	1	AAC	E	2	1,294	36	48,660	73	17	83	0	11/24/2025	Surface Reconstruction - AC	4/1/2009
464	7000	Olive St	Park St	Westminster Av	3	AC	E	2	793	54	40,856	73	27	35	38	1/13/2026	New Construction - Initial	1/1/1980
47	820	Azalea Wy	Obsidian Dr	South End	6	AC	E	2	250	27	10,007	73	0	100	0	2/2/2026	New Construction - Initial	1/1/1980
619	9220	Topaz St	Emerald Av	Sapphire Av	5	AC	E	2	1,000	33	31,492	73	42	47	11	1/7/2026	New Construction - Initial	1/1/1980
677	10180	Whispering Pine Cir	Bowling Green St	Brookhurst St	6	AC	E	2	320	34	11,040	73	7	93	0	1/27/2026	Cold Mill and Overlay	2/8/2010
329	5100	Jonquil Ave	Begonia St	Narcissus St	6	AC	E	2	770	36	25,184	73	0	100	0	1/13/2026	2" Conventional Overlay	3/25/2015
385	5860	Manor Dr	19th St	18th St	4	AAC	E	2	283	32	10,180	73	9	91	0	1/6/2026	Overlay - AC Structural	1/30/2014
683	10270	Willow Ln	Chinook Av	Maple St	2	AC	E	2	386	33	12,181	73	30	70	0	12/8/2025	New Construction - Initial	1/1/1980
88	1500	Booney St	Stern Av	End	6	AAC	E	2	550	33	19,985	73	0	100	0	1/28/2026	Overlay - AC Structural	1/1/2019
275	4130	Green Fern Cir	Bowling Green St	End	6	AC	E	2	360	34	13,274	73	7	93	0	1/27/2026	Cold Mill and Overlay	2/8/2010
5	80	13th St	Pacific Ave	Beach Blvd	4	AC	C	2	585	33	20,662	73	11	46	43	1/14/2026	New Construction - Initial	1/1/1980
8	180	16th St	Pacific Ave	Beach Blvd	4	AC	E	2	595	36	18,292	73	47	37	16	1/14/2026	New Construction - Initial	1/1/1980
15	370	23rd St	Pacific Ave	Beach Blvd	4	AAC	E	2	637	31	22,464	73	25	75	0	1/6/2026	Overlay - AC Structural	1/30/2014
224	3460	Emerald Ave	Quartz St	Magnolia St	5	AC	E	2	1,150	33	36,503	73	47	49	4	1/7/2026	New Construction - Initial	1/1/1980
432	6440	Monroe St	Worthy Dr	Crown Ct	5	AC	E	2	1,050	36	36,445	73	43	55	2	1/21/2026	Cold Mill and Overlay	2/8/2010
444	6640	Natoma Ave	Eden St	Magnolia St	5	AC	E	2	1,200	33	39,097	74	24	26	50	1/14/2026	New Construction - Initial	1/1/1980
10	240	19th St	Pacific Ave	Beach Blvd	4	AAC	E	2	653	31	21,507	74	9	91	0	1/6/2026	Overlay - AC Structural	1/30/2014
307	4710	Ida Wy	Chinook Ave	Glacier Dr	2	AAC	E	2	246	32	8,459	74	29	71	0	12/8/2025	Overlay - AC Structural	1/1/2019
473	7170	Osborne St	Brooke Av	End	1	AC	E	2	750	36	26,895	74	14	86	0	1/6/2026	2" Conventional Overlay	9/30/2015
514	7760	Purdy St	Thorpe Av	End	5	AC	E	2	1,200	36	42,618	74	41	40	19	1/13/2026	New Construction - Initial	1/1/1980
134	2180	Charleville Dr	23rd St	21st St	4	AAC	E	2	635	31	20,353	74	9	91	0	1/6/2026	Overlay - AC Structural	1/30/2014
306	4700	Huxley Cir	Brooke Ave	End	1	AC	E	2	400	36	14,391	74	14	76	10	1/6/2026	2" Conventional Overlay	9/30/2015
270	4070	Golders Green Ln	Bellehurst Ave	Parkview Ave	6	AC	E	2	500	37	20,554	74	18	82	0	1/28/2026	New Construction - Initial	1/1/1980
295	4460	Hereford St	Lancashire Ave	Camphor Ave	1	AAC	E	2	627	36	24,083	74	19	81	0	11/24/2025	Overlay - AC Structural	3/1/2012
349	5390	La Pat Pl	Humboldt Av	Westminster Av	2	AC	E	2	1,423	33	47,303	74	29	71	0	12/17/2025	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
999	6450	All American Way	Westminster Ave	13th St	4	AC	E	2	1,249	36	51,565	74	8	53	39	1/19/2026	New Construction - AC	1/1/1980
91	1540	Bowling Green St	Parkview Ave	Premier Ave	6	AC	E	2	1,300	36	43,509	74	14	86	0	1/27/2026	New Construction - Initial	1/1/1980
129	2130	Cedarwood Ave	13th St	Westminster Ave	4	AC	E	2	1,298	33	43,213	74	40	49	11	1/14/2026	New Construction - Initial	1/1/1980
256	3860	Garro Pl	Harper St	End	4	AC	E	2	300	33	10,625	74	48	45	7	1/7/2026	Surface Treatment - Slurry Seal	4/28/2014
361	5520	Lava Wy	Obsidian Dr	End	6	AC	E	2	400	33	15,282	74	14	86	0	2/2/2026	New Construction - Initial	1/1/1980
363	5550	Lee Dr	Meinhardt Rd	Dorothy Dr	2	AC	E	2	1,294	33	43,815	74	59	23	18	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
635	9420	Uxbridge St	Shrewsbury Av	Horsham Av	1	AC	E	2	1,390	37	53,874	74	75	25	0	11/25/2025	New Construction - Initial	1/1/1980
17	430	Abbey Dr	Barney St	Dorfsmith Dr	2	AC	E	2	840	33	28,525	74	33	67	0	12/15/2025	New Construction - Initial	1/1/1980
235	3570	Exeter St	Northampton Ave	Banbury Ave	6	AAC	E	2	360	33	15,057	74	6	68	26	1/27/2026	Overlay - AC Structural	6/26/2013
522	7850	Ralph Ln	Sowell Av	Santee Av	2	AC	E	2	658	34	21,863	74	43	57	0	1/13/2026	New Construction - Initial	1/1/1980
614	9150	Tilden St	Hazard Av	Sabre Ln	5	AC	C	2	800	33	24,810	74	37	41	22	1/26/2026	New Construction - Initial	1/1/1980
632	9410	Tyler Ct	Forrest Ln	End	6	AC	E	2	90	30	5,238	74	13	87	0	1/28/2026	New Construction - Initial	1/1/1980
428	6390	Modoc Dr	Comanche Dr	Sioux Rd	2	AC	E	2	671	48	22,680	74	48	44	8	12/16/2025	New Construction - Initial	1/1/1980
591	8830	Storm Dr	Snow St	End	5	AAC	E	2	400	33	14,995	74	29	71	0	1/26/2026	Overlay - AC Structural	6/12/2013
572	8490	Sioux Rd	Iroquois Rd	Erie Pl	2	AC	E	2	1,086	37	41,048	75	32	68	0	12/15/2025	New Construction - Initial	1/1/1980
659	9780	Watson Cir	Brooke Av	End	1	AC	E	2	250	36	10,071	75	0	88	12	1/6/2026	2" Conventional Overlay	9/30/2015
683	10280	Willow Ln	Ebony Wy	Chinook Av	2	AC	E	2	1,206	33	37,561	75	38	62	0	12/2/2025	New Construction - Initial	1/1/1980
42	770	Ashmore Cir	Sowell Ave	End	2	AAC	E	2	177	32	7,521	75	7	56	37	1/13/2026	New Construction - Initial	1/1/1980
70	1110	Bestal Ave	Amarillo Dr	Jasperson Wy	3	AC	E	2	855	33	27,857	75	29	56	15	1/2/2026	New Construction - Initial	1/1/1980
157	2530	Colgate Ave	Temple St	Clemson St	3	AAC	E	2	930	36	33,752	75	41	58	1	1/20/2026	Overlay - AC Structural	3/1/2012
425	6350	Mint Ave	Osborne St	Magnolia St	1	AC	E	2	450	36	14,373	75	32	68	0	1/6/2026	2" Conventional Overlay	9/30/2015
497	7520	Petsworth Ln	Hazard Av	Parkview Av	6	AC	E	2	630	37	22,304	75	46	54	0	1/28/2026	New Construction - Initial	1/1/1980
627	9350	Tryon St	Barry Pl	Timothy Ln	1	AC	E	2	350	33	12,031	75	23	60	17	1/5/2026	New Construction - Initial	1/1/1980
196	3000	Diamond St	Emerald Ave	Sapphire Ave	5	AC	E	2	950	33	32,496	75	0	34	66	1/7/2026	New Construction - Initial	1/1/1980
512	7710	Princeton Ave	University St	Winthrop St	1	AC	E	2	1,285	34	42,735	75	69	31	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
20	480	Alcester St	Sabre Ln	Greenville Ave	5	AC	E	2	1,400	33	46,189	75	37	63	0	1/26/2026	Unknown Activity	1/1/2008
140	2280	Chestnut St	Santee Ave	Fenwick Ln	3	AC	C	2	1,252	45	58,484	75	64	32	4	1/14/2026	New Construction - Initial	1/1/1980
176	2760	Crown Ct	Monroe St	End	5	AC	E	2	450	32	19,240	75	35	65	0	1/21/2026	Unknown Activity	6/14/2010
153	2470	Clemson St	Colgate Ave	Citadel Cir	3	AC	E	2	426	32	14,061	75	77	14	9	2/20/2026	New Construction - Initial	1/1/1980
461	6950	Oasis Ave	Newland St	End	4	AC	E	2	1,600	33	52,575	75	16	56	28	1/19/2026	Unknown Activity	4/1/2009
579	8600	Sowell Ave	Goldenwest St	Santee Av	2	AC	E	2	1,213	33	40,734	75	38	42	20	1/13/2026	New Construction - Initial	1/1/1980
587	8770	Sterling Wy	Wilson St	Newland St	4	AAC	E	2	500	33	14,681	75	14	82	4	1/19/2026	Cement Treated Base	3/1/2014
613	9120	Thorpe Ave	Nantucket St	End	5	AC	E	2	2,100	33	70,514	75	24	40	36	1/13/2026	New Construction - Initial	1/1/1980
52	890	Bannock Rd	Seneca Dr	Klamath Dr	2	AC	E	2	843	33	29,985	75	36	64	0	12/16/2025	Cold Mill and Overlay	2/8/2010
9700	14220	Sugar Dr	Cedarwood Ave	McFadden Ave	3	AC	E	0	335	16	6,360	75	41	56	3	1/20/2026	New Construction - Initial	1/1/1990
70	1120	Bestal Ave	Siskiyou St	Goldenwest St	2	AC	E	2	1,179	33	39,991	75	57	40	3	1/2/2026	New Construction - Initial	1/1/1980
545	8170	Sabre Ln	Alcester St	End	5	AC	E	2	860	33	31,616	75	29	37	34	2/25/2026	Unknown Activity	1/1/2007
648	9670	Von Cir	Sabre Ln	End	5	AC	E	2	520	34	17,713	75	9	91	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
324	5050	Jennrich Ave	Purdy St	End	4	AC	E	2	1,450	33	46,354	75	53	32	15	1/20/2026	New Construction - Initial	1/1/1980
424	6340	Milton Ave	Willow Ln	Hefley St	2	AC	C	2	1,221	33	38,068	75	18	44	38	12/15/2025	Unknown Activity	4/1/2009
506	7630	Poinsettia Wy	McFadden Av	Coronet Av	6	AC	E	2	1,100	36	39,890	75	16	68	16	1/13/2026	Unknown Activity	4/1/2009
167	2650	Conner Cir	Wilson St	End	4	AC	E	2	350	27	14,385	75	19	81	0	1/6/2026	Cold Mill and Overlay	2/1/2011
658	9775	Washington Ave	Colleta Pl	Givens Pl	5	AC	E	2	300	33	9,858	75	27	55	18	1/26/2026	New Construction - Initial	1/1/1980
47	830	Azalea Wy	Larkspur Dr	Stoneridge Ave	6	AC	E	2	800	33	24,007	76	39	32	29	1/8/2026	New Construction - Initial	1/1/1980
387	5920	Marble St	Diamond St	End	5	AC	E	2	200	33	7,994	76	0	55	45	2/2/2026	New Construction - Initial	1/1/1980
563	8360	Shawnee Rd	Iroquois Rrd	Klamath Dr	2	AC	E	2	934	34	32,926	76	50	50	0	12/16/2025	New Construction - Initial	1/1/1980
579	8590	Sowell Ave	Goldenwest St	Davis St	3	AAC	E	2	1,136	33	36,535	76	41	59	0	1/13/2026	Overlay - AC Structural	6/12/2013
33	630	Apache Rd	Klamath Dr	Sioux Rd	2	AC	E	2	760	37	29,378	76	35	52	13	12/16/2025	New Construction - Initial	1/1/1980
110	1840	Calendula Ave	Narcissus St	Dalewood Ln	6	AAC	E	2	550	36	20,396	76	7	93	0	1/13/2026	Surface Reconstruction - AC	11/26/2008
516	7795	Quartz St	Brooke Av	End	1	AC	E	2	483	33	17,616	76	16	84	0	1/6/2026	Cement Treated Base	9/30/2015
524	7860	Rathburn Ave	Padres Av	End	5	AC	E	2	300	33	9,359	76	0	42	58	1/19/2026	New Construction - Initial	1/1/1980
573	8520	Siskiyou St	Bestel Av	Hood Dr	2	AC	E	2	1,031	33	33,818	76	11	34	55	12/17/2025	Unknown Activity	1/1/2008
25	540	Amador Ave	Milan Ave	Vallecito Dr	1	AC	E	2	881	34	29,670	76	0	100	0	12/1/2025	New Construction - Initial	1/1/1980
170	2690	Cornell Ave	Winthrop St	End	1	AC	E	2	564	33	19,461	76	65	35	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
542	8140	Roxanne Dr	Homer St	Ginger Ln	2	AC	E	2	743	34	25,472	76	56	44	0	12/17/2025	Cold Mill and Overlay	3/17/2011
665	9890	Wembley Cir	Forrest Ln	End	6	AC	E	2	630	33	24,049	76	0	77	23	1/28/2026	New Construction - Initial	1/1/1980
63	1030	Bellehurst Ave	Petsworth Ln	Goldens Green Ln	6	AC	E	2	1,140	37	43,658	76	20	56	24	1/28/2026	Cold Mill and Overlay	2/8/2010
120	1990	Carlton Ave	Maryknoll St	Vermont St	3	AC	E	2	875	38	32,937	76	42	54	4	12/10/2025	Unknown Activity	6/14/2010
410	9860	Meinhardt Rd	Springdale St	Barney St	2	AC	E	2	1,628	32	53,103	76	36	34	30	12/15/2025	New Construction - Initial	1/1/1980
532	8000	Riverton St	Marion Av	Hazard Av	4	AC	E	2	500	35	15,549	76	0	100	0	1/20/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
608	9050	Tattershall Ave	Uxbridge St	Somerset St	1	AC	E	2	1,174	37	46,692	76	25	75	0	11/25/2025	New Construction - Initial	1/1/1980
684	10320	Wilson St	McFadden Av	Devilwood Cir	5	AAC	E	2	625	33	23,218	76	43	57	0	1/9/2026	Overlay - AC Structural	1/1/2019
516	7790	Quartz St	Edinger Av	Brooke Av	1	AC	E	2	705	36	25,320	76	0	100	0	1/5/2026	Cement Treated Base	9/30/2015
374	5710	Loyola Ave	University St	Winthrop St	1	AC	E	2	1,275	33	43,764	76	43	43	14	11/19/2025	Unknown Activity	8/30/2008
5	90	13th St	Cedarwood Ave	Pacific Ave	4	AC	C	2	616	33	21,107	76	13	47	40	1/14/2026	New Construction - Initial	1/1/1980
57	970	Baylor Dr	Hoover St	Webber Pl	4	AAC	E	2	1,027	33	35,089	76	19	25	56	1/14/2026	Surface Reconstruction - AC	7/23/2010
308	4740	Illinois St	Trask Ave	21st St	3	AC	E	2	1,235	34	40,263	76	23	48	29	12/26/2025	Surface Treatment - Slurry Seal	7/13/2011
572	8470	Sioux Rd	Iroquois Rd	End	2	AC	E	2	608	37	25,546	76	27	50	23	12/16/2025	New Construction - Initial	1/1/1980
77	1220	Bishop Ave	Purdy St	Neece St	5	AC	E	2	900	34	31,223	77	23	33	44	1/19/2026	New Construction - Initial	1/1/1980
345	5300	Klamath Dr	Kiowa Rd	Apache Rd	2	AC	E	2	978	33	28,322	77	54	46	0	12/16/2025	New Construction - Initial	1/1/1980
248	3700	Franklin Cir	Duncannon Ave	North End	1	AC	E	2	455	33	16,645	77	19	59	22	12/2/2025	Surface Treatment - Slurry Seal	7/13/2011
7	170	15th St	All-American Way	Newland St	4	AC	C	2	1,250	33	43,377	77	40	60	0	1/19/2026	Unknown Activity	1/1/2007
290	4360	Hazard Ave	Goldenwest St	End	2	AC	E	2	1,474	27	50,413	77	42	58	0	1/13/2026	New Construction - Initial	1/1/1980
538	8080	Rondeau St	Westminster Av	End	2	AC	E	2	586	33	23,189	77	53	40	7	12/17/2025	New Construction - Initial	1/1/1980
10	230	19th St	Richardson Wy	Pacific Ave	4	AAC	E	2	467	33	16,026	77	17	81	2	1/6/2026	Overlay - AC Structural	1/30/2014
438	6540	Moran St	Hazard Av	Madison Av	5	AC	E	2	1,150	34	38,454	77	40	60	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
644	9620	Victoria Pl	Suffolk St	Pimlico Rd	1	AC	E	2	526	30	16,566	77	28	62	10	11/25/2025	Cold Mill and Overlay	10/20/2008
138	2230	Cherry St	Natal Dr	Bestel Ave	3	AC	E	2	1,117	34	37,386	77	11	89	0	1/2/2026	Unknown Activity	8/30/2008
429	6400	Mohawk Rd	Navajo Rd	Cayuga Dr	2	AC	E	2	802	34	27,811	77	15	85	0	12/16/2025	Cold Mill and Overlay	2/8/2010
463	6980	Obsidian St	Magnolia St	End	6	AC	E	2	1,250	33	40,845	77	27	73	0	1/8/2026	New Construction - Initial	1/1/1980
506	7640	Poinsettia Wy	Larkspur Dr	McFadden Av	6	AC	E	2	1,408	33	42,864	77	52	37	11	1/8/2026	New Construction - Initial	1/1/1980
510	7680	Primrose Ln	Larkspur Dr	Carnation Dr	6	AC	E	2	1,250	33	39,105	77	49	22	29	1/8/2026	New Construction - Initial	1/1/1980
530	7970	Rio Grande St	Marion Av	Miami Av	4	AC	E	2	400	33	12,073	77	10	90	0	1/20/2026	New Construction - Initial	1/1/1980
371	5670	Lomay Ave	Wilson St	Newland St	4	AC	E	2	600	33	21,376	78	51	18	31	1/7/2026	Cold Mill and Overlay	2/1/2010
391	5970	Marilyn Cir	Meinhardt Rd	End	2	AC	E	2	468	33	17,223	78	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
13	320	21st St	Hospital Cir	Beach Blvd	4	AAC	E	2	1,364	32	41,354	78	17	72	11	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
404	6130	McClure Ave	Bonnema St	Moran St	4	AC	E	2	750	33	25,938	78	0	57	43	1/21/2026	New Construction - Initial	1/1/1980
638	9550	Van Buren St	McFadden Av	City Limit	5	AC	C	2	608	33	20,374	78	8	92	0	1/21/2026	New Construction - Initial	1/1/1980
44	790	Aster St	Calendula Ave	Jonquil Ave	6	AC	E	2	550	33	18,534	78	0	100	0	1/13/2026	2" Conventional Overlay	3/25/2015
128	2110	Cedar St	Bestel Ave	Natal Dr	3	AAC	E	2	1,234	34	41,011	78	46	39	15	1/2/2026	Overlay - AC Structural	1/1/2019
287	4290	Harper St	Satinwood Cir	Bolsa Ave	5	AAC	E	2	150	36	5,397	78	0	100	0	2/2/2026	Overlay - AC Structural	1/1/2019
484	7370	Parkview Ave	Golders Green Ln	End	6	AC	E	2	750	33	25,231	78	13	87	0	1/27/2026	New Construction - Initial	1/1/1980
508	7660	Poppy Wy	Orchid Dr	Poppy Cir	6	AC	E	2	300	33	9,763	78	25	53	22	1/19/2026	New Construction - Initial	1/1/1980
539	8090	Rose Ln	Obsidian Dr	End	6	AC	E	2	100	33	4,859	78	0	74	26	2/2/2026	New Construction - Initial	1/1/1980
143	2360	Chinook Ave	Willow Ln	Springdale St	2	AAC	E	2	1,591	33	51,504	78	58	37	5	12/2/2025	Overlay - AC Structural	1/1/2019
410	9850	Meinhardt Rd	Barney St	End	2	AC	E	2	1,586	32	48,561	78	20	39	41	12/15/2025	New Construction - Initial	1/1/1980
480	7320	Palomar St	Kiowa Rd	Garden Grove Blvd (Frontage Rd)	2	AAC	E	2	996	33	32,684	78	0	100	0	1/2/2026	Overlay - AC Structural	1/1/2020
561	8320	Sequoia dr	Siskiyou St	End	2	AC	E	2	669	33	23,955	78	24	76	0	1/2/2026	Unknown Activity	4/1/2009
41	760	Ashley Cir	Calendula Ave	End	6	AC	E	2	450	33	18,754	78	9	91	0	1/13/2026	2" Conventional Overlay	3/25/2015
161	2590	Comanche Dr	Sioux Rd	Modoc Dr	2	AC	E	2	762	33	24,999	78	36	64	0	12/16/2025	New Construction - Initial	1/1/1980
346	5310	Klondike Ave	Olympus Dr	Sutter Dr	2	AC	E	2	561	33	18,953	78	35	64	1	12/30/2025	New Construction - Initial	1/1/1980
439	6380	Myrtlewood Cir	Wilson St	End	5	AAC	E	2	350	38	13,670	78	0	98	2	1/9/2026	Overlay - AC Structural	1/1/2019
26	550	Amarillo Dr	Brooklawn Dr	Benton Ave	3	AAC	E	2	1,177	34	38,017	78	0	47	53	2/19/2026	Overlay - AC Structural	1/1/2019
317	4920	Jackson St	21st St	Westminster Ave	4	AC	E	2	1,300	36	45,212	78	49	49	2	1/6/2026	Surface Treatment - Slurry Seal	7/13/2011
616	9180	Timothy Ln	Tyron St	End	1	AC	E	2	500	33	18,961	78	42	58	0	1/5/2026	New Construction - Initial	1/1/1980
684	10325	Wilson St	Devilwood Cir	Aspenwood Av	5	AAC	E	2	625	33	24,217	78	10	90	0	1/9/2026	Overlay - AC Structural	1/1/2019
704	690	Arizona St	Westminster Ave	Hospital Cir	4	AC	C	2	1,100	33	38,350	79	8	61	31	1/5/2026	Unknown Activity	5/15/2008
3	60	12th St	Cedarwood Ave	Pacific Ave	4	AC	E	2	618	33	20,990	79	8	19	73	1/14/2026	New Construction - Initial	1/1/1980
280	4190	Gulino Cir	Allen St	End	3	AAC	E	2	125	30	5,646	79	10	88	2	1/13/2026	Overlay - AC Structural	6/12/2013
335	5150	Keats Cir	Mint Av	End	1	AC	E	2	350	33	12,269	79	27	73	0	1/6/2026	2" Conventional Overlay	9/30/2015
403	6080	Maychick Cir	Iroquois Rd	End	2	AC	E	2	140	34	6,296	79	27	73	0	12/15/2025	New Construction - Initial	1/1/1980
484	7380	Parkview Ave	Petsworth Ln	Golders Green Ln	6	AC	E	2	1,136	36	41,413	79	34	59	7	1/28/2026	New Construction - Initial	1/1/1980
565	8390	Shell Cir	Ontario Dr	End	5	AC	E	2	420	33	16,385	79	10	85	5	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
21	490	Alfred Ave	Hammon Pl	End	1	AC	E	2	121	48	6,254	79	28	72	0	12/1/2025	New Construction - Initial	1/1/1980
469	7110	Orchid Dr	Canna St	Azalea Wy	6	AC	E	2	1,000	33	31,414	79	37	31	32	1/8/2026	New Construction - Initial	1/1/1980
695	10500	Yale Ave	University St	College St	1	AC	E	2	919	33	30,208	79	67	33	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
432	6460	Monroe St	Westminster Av	21st St	4	AC	E	2	1,300	34	47,182	79	36	62	2	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
705	1685	Brookhurst St Frontage Rd	Margo Ln	N End	6	AC	E	2	401	26	10,126	79	21	53	26	1/27/2026	New Construction - AC	1/1/1980
426	6360	Mirage Ave	Glitter St	End	4	AC	E	2	820	36	26,906	79	24	73	3	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
449	6740	Nevada St	Brooklawn Dr	End	3	AC	E	2	234	34	9,742	79	10	86	4	1/5/2026	Cold Mill and Overlay	2/8/2010

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
90	1520	Bowie St	Cody Ave	Carnegie Ave	5	AC	E	2	845	33	32,382	79	23	54	23	1/9/2026	Cold Mill and Overlay	2/8/2010
443	6620	Natal Dr	Cedar St	Goldenwest St	3	AAC	C	2	1,230	36	44,092	79	41	48	11	12/26/2025	Overlay - AC Structural	1/1/2020
449	6750	Nevada St	Westminster Av	California Av	4	AC	E	2	281	33	8,942	79	10	90	0	1/5/2026	New Construction - Initial	1/1/1980
68	1090	Bermuda Ave	Fox Hills St	End	5	AAC	E	2	912	36	35,081	79	0	48	52	1/7/2026	Overlay - AC Structural	2/28/2022
670	10090	Westmoreland Cir	Wiltshire St	End	1	AAC	E	2	492	33	17,516	79	36	64	0	11/24/2025	Overlay - AC Structural	3/1/2012
149	2420	Clare Cir	Stinson Ln	End	6	AC	E	2	100	32	5,226	79	0	100	0	2/2/2026	New Construction - Initial	1/1/1980
465	7050	Olympus Dr	Tillamook Av	Trask Av	2	AC	E	2	368	33	13,246	79	28	72	0	12/30/2025	Cold Mill and Overlay	10/20/2008
507	7650	Poppy Cir	Poppy Wy	End	6	AC	E	2	200	33	11,516	79	42	51	7	1/19/2026	New Construction - Initial	1/1/1980
21	500	Alfred Ave	Milan Ave	Hammon Pl	1	AC	E	2	1,112	33	37,312	79	46	45	9	12/1/2025	New Construction - Initial	1/1/1980
446	6700	Neece St	Rathburn Ave	Thorpe Ave	5	AC	E	2	250	33	8,802	79	18	62	20	1/19/2026	New Construction - Initial	1/1/1980
480	7330	Palomar St	Humboldt Av	Trask Av	2	AC	E	2	1,135	33	36,768	79	75	25	0	12/30/2025	New Construction - Initial	1/1/1980
137	2220	Cherokee Dr	Kiowa Rd	Navajo Rd	2	AC	E	2	838	34	27,937	79	8	87	5	12/16/2025	New Construction - Initial	1/1/1980
175	2750	Cromwell Cir	Duke Dr	End	6	AAC	E	2	350	33	12,085	80	0	98	2	1/12/2026	Overlay - AC Structural	6/26/2013
596	8910	Summit Cir	Sequoia Dr	End	2	AC	E	2	408	33	14,456	80	9	71	20	1/2/2026	Unknown Activity	4/1/2009
29	580	Amidon Cir	Jefferson St	End	4	AAC	E	2	150	33	5,776	80	0	100	0	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
51	880	Banbury Ave	Norwich Cir	End	6	AAC	E	2	850	36	32,158	80	0	97	3	1/27/2026	Overlay - AC Structural	6/26/2013
234	3560	Evans Cir	Wheeler Ave	End	2	AC	E	2	135	33	6,586	80	0	41	59	12/17/2025	Cold Mill and Overlay	10/20/2008
244	3660	Forrest Ln	Parkview Ave	Premier Ave	6	AC	E	2	1,300	33	48,223	80	8	84	8	1/27/2026	New Construction - Initial	1/1/1980
110	1850	Calendula Ave	Bushard St	Narcissus St	6	AAC	E	2	1,100	36	32,952	80	18	82	0	1/13/2026	Surface Reconstruction - AC	11/26/2008
223	3440	Emerado Pl	Harper St	End	4	AC	E	2	300	33	10,579	80	14	86	0	1/7/2026	Surface Treatment - Slurry Seal	4/28/2014
466	7070	Ontario Dr	Hazard Av	End	4	AC	E	2	350	50	13,947	80	10	88	2	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
546	8190	Saint Andrews Ave	Pensacola St	End	5	AAC	E	2	1,100	33	38,687	80	24	73	3	1/7/2026	Overlay - AC Structural	12/30/2013
571	8460	Sinclair Cir	Moran St	End	5	AC	E	2	420	33	16,000	80	15	85	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
370	5640	Locust St	Main St	Maple St	3	AC	E	2	592	61	32,841	80	29	39	32	1/13/2026	Unknown Activity	6/30/2008
9250	14030	Beach Blvd WF	S End	End of County Road	3	AC	E	0	283	28	16,338	80	0	42	58	1/20/2026	New Construction - Initial	1/1/1990
262	3920	Glacier Dr	Jon Wy	Ida Wy	2	AAC	E	2	1,004	33	35,161	80	21	79	0	12/8/2025	Overlay - AC Structural	1/1/2019
324	5020	Jennrich Ave	Newland St	Purdy St	4	AC	E	2	830	33	28,791	80	43	48	9	1/20/2026	New Construction - Initial	1/1/1980
382	5810	Maidstone St	Northampton Av	City Limit	6	AAC	E	2	525	37	20,163	80	9	67	24	1/27/2026	Overlay - AC Structural	6/26/2013
170	2700	Cornell Ave	University St	Winthrop st	1	AC	E	2	1,280	33	42,238	80	83	15	2	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
9400	14100	Harhay Ave	Cedarwood Ave	End	3	AC	E	0	733	33	26,272	80	11	38	51	1/20/2026	New Construction - Initial	1/1/1990
673	10140	Westwood Dr	Grey Oaks St	Bushard St	6	AAC	E	2	1,100	36	42,293	80	49	50	1	1/12/2026	Surface Reconstruction - AC	9/6/2011
13	310	21st St	Cherry St	Goldenwest St	3	AC	C	2	1,209	36	40,406	80	53	42	5	12/26/2025	New Construction - Initial	1/1/1980
1059	90067	Colby Cir	Vermont St	End	3	AAC	E	2	135	34	6,595	80	30	70	0	12/10/2025	Overlay - AC Structural	1/1/2020
179	2800	Cynthia Dr	Springdale St	Pamela Ln	2	AC	E	2	142	37	6,068	80	59	41	0	12/16/2025	2" Conventional Overlay	3/25/2015
261	3910	Givens Pl	Sinclair Ave	Washington Ave	5	AC	E	2	840	33	29,431	80	45	55	0	1/26/2026	Unknown Activity	1/1/2007
317	4915	Jackson St	23rd St	21st St	4	AC	E	2	600	36	23,683	80	23	75	2	1/6/2026	Surface Treatment - Slurry Seal	7/13/2011
408	6150	Medora Pl	23rd St	End	4	AAC	E	2	550	33	18,843	80	44	56	0	1/6/2026	Overlay - AC Structural	3/25/2010
50	870	Ballou Cir	Fowler Cir	South End	6	AAC	E	2	100	25	6,565	80	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
378	5760	Madison Ave	Moran St	Bushard St	5	AC	E	2	1,150	33	38,055	80	17	83	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
589	8790	Stinson Ln	Bushard St	End	6	AAC	E	2	200	37	9,934	80	0	100	0	2/2/2026	Overlay - AC Structural	6/26/2013
1057	90064	West Dr	Bolsa Av	Mall	2	AC	E	4	230	58	9,279	80	0	52	48	12/9/2025	New Construction - Initial	1/1/1980
666	9910	Westhaven Cir	Butterfield St	End	6	AAC	E	2	750	33	27,554	80	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
27	560	Ambassador Dr	Commonwealth Pl	Royal Pl	6	AC	E	2	650	36	21,113	80	41	59	0	1/8/2026	2" Conventional Overlay	4/21/2016
259	3890	Gillingham Cir	Southfield Dr	End	1	AC	E	2	400	34	14,603	80	33	52	15	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
446	6690	Neece St	Natoma Av	Bishop Av	5	AC	E	2	250	34	9,297	80	0	59	41	1/19/2026	New Construction - Initial	1/1/1980
456	6870	Norwich Cir	Banbury Av	End	6	AAC	E	2	200	37	12,745	80	0	79	21	2/2/2026	Overlay - AC Structural	6/26/2013
482	7350	Pamela Ln	End	End	2	AC	E	2	796	33	31,496	81	16	84	0	12/16/2025	2" Conventional Overlay	3/25/2015
511	7690	Prince Cir	Ambassador Dr	End	6	AC	E	2	200	33	8,235	81	22	78	0	2/2/2026	2" Conventional Overlay	4/21/2016
83	1410	Bolsa Chica Rd Frontage Rd	Hampton Ct	Vauxhall Rd	1	AC	E	2	420	25	11,273	81	0	58	42	11/25/2025	New Construction - Initial	1/1/1980
99	1690	Brooklawn Dr	Hoover St	End	3	AC	E	2	600	33	20,807	81	48	52	0	1/5/2026	Surface Treatment - Slurry Seal	7/13/2011
140	90059	Chestnut St	Plaza St	Westminster Blvd	3	AC	C	2	470	43	14,120	81	28	65	7	1/13/2026	New Construction - Initial	1/1/1980
464	7020	Olive St	Westminster Av	21st St	3	AC	C	2	1,266	43	51,123	81	58	32	10	1/6/2026	Unknown Activity	6/30/2008
130	2140	Centerstone Ct	Hammon Pl	Centerstone Ct	1	AC	E	2	1,314	31	38,836	81	35	65	0	11/24/2025	New Construction - Initial	1/1/1980
349	5350	La Pat Pl	Trask Av	Tillamook Av	2	AC	E	2	363	33	12,464	81	48	38	14	1/2/2026	Cold Mill and Overlay	10/20/2008
545	8180	Sabre Ln	Moran St	Bushard St	5	AC	E	2	1,150	33	36,045	81	12	86	2	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
631	9400	Tungwood St	Aspenwood Av	Satinwood Cir	5	AAC	E	2	1,100	37	41,615	81	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
653	9740	Walter Cir	Meinhardt Rd	End	2	AAC	E	2	226	33	9,473	81	13	87	0	12/15/2025	Overlay - AC Structural	3/1/2012
87	1490	Boone Cir	Bowie St	End	5	AC	E	2	400	33	15,936	81	0	94	6	1/9/2026	Surface Treatment - Slurry Seal	4/28/2014
190	2940	Delray Cir	Pensacola St	End	5	AAC	E	2	400	33	15,493	81	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
288	4320	Hartford Wy	College St	End	1	AC	E	2	361	33	13,881	81	51	41	8	11/19/2025	Unknown Activity	8/30/2008

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
539	8100	Rose Ln	Stoneridge Av	Orchid Dr	6	AC	E	2	550	33	16,584	81	42	56	2	1/19/2026	New Construction - Initial	1/1/1980
78	1250	Bishop St	Magnolia St	Moran St	6	AC	C	2	1,400	36	58,468	81	17	83	0	2/19/2026	Unknown Activity	1/1/2008
239	3600	Fenwick Ln	Chestnut St	End	3	AC	E	2	567	34	24,636	81	16	71	13	1/14/2026	Unknown Activity	1/1/2007
548	90057	Saint James Pk	Baker St	Bolsa Chica Rd	1	AC	E	2	325	30	7,495	81	14	86	0	11/25/2025	New Construction - Initial	1/1/1980
622	9250	Tracy Ave	Notre Dame St	Maryknoll St	3	AC	E	2	219	33	8,460	81	46	51	3	12/10/2025	Surface Treatment - Slurry Seal	6/14/2010
260	3900	Ginger Ln	La Pat Pl	Nancy Lee Dr	2	AC	E	2	791	33	28,512	81	14	86	0	12/17/2025	Cold Mill and Overlay	3/17/2011
267	3960	Goebel Ln	Reading Ave	End	4	AAC	E	2	120	34	5,655	81	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
485	7390	Parliament Ave	Commonwealth Pl	Edinger Av	6	AC	E	2	1,385	33	41,342	81	31	67	2	1/8/2026	2" Conventional Overlay	4/21/2016
136	2210	Chelsea Cir	Oakcliff Dr	End	6	AC	E	2	400	33	15,052	81	18	69	13	1/14/2026	Cold Mill and Overlay	2/1/2010
185	2870	Dartmouth Ave	Fordham St	Winthrop St	1	AC	E	2	1,054	33	35,653	81	54	46	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
321	4970	Jasperson Wy	Westminster Av	End	4	AC	E	2	603	34	22,589	81	18	82	0	1/6/2026	Cold Mill and Overlay	2/8/2010
590	8820	Stoneridge Ave	Magnolia St	Briarcliff St	6	AC	E	2	1,100	33	38,888	81	49	49	2	1/8/2026	New Construction - Initial	1/1/1980
77	1205	Bishop Ave	Beach Blvd	Jackson St	3	AC	E	2	568	36	21,291	81	54	41	5	1/21/2026	New Construction - AC	1/1/1980
354	5440	Laramie Cir	Bowie St	End	5	AC	E	2	400	33	14,449	81	0	94	6	1/9/2026	Surface Treatment - Slurry Seal	4/28/2014
22	510	Allen St	Santee Ave	Sowell Ave	3	AAC	E	2	655	34	21,674	81	0	89	11	1/13/2026	Overlay - AC Structural	6/12/2013
116	1950	Canna Wy	Carnation Dr	Larkspur Dr	6	AC	E	2	1,350	33	44,463	81	24	40	36	1/8/2026	New Construction - Initial	1/1/1980
193	2970	Devilwood Cir	Wilson St	End	5	AAC	E	2	350	38	13,688	81	12	88	0	1/9/2026	Overlay - AC Structural	1/1/2019
197	3010	Dickens Cir	Oakcliff Dr	End	6	AC	E	2	400	33	16,348	81	16	74	10	1/14/2026	Cold Mill and Overlay	2/1/2010
121	2000	Carmel Cir	Eden St	End	5	AAC	E	2	450	33	15,372	82	0	100	0	1/7/2026	Overlay - AC Structural	12/30/2013
283	4240	Hammon Pl	Rochelle Ave	Vallecito Dr	1	AC	C	2	1,031	34	33,402	82	27	61	12	12/1/2025	New Construction - Initial	1/1/1980
317	4900	Jackson St	Westminster Ave	15th St	4	AC	E	2	750	36	27,174	82	0	96	4	1/19/2026	Unknown Activity	12/30/2012
476	7220	Pacheco Ave	Purdy St	Webster St	5	AC	E	2	1,200	33	37,458	82	0	51	49	1/19/2026	New Construction - Initial	1/1/1980
501	7570	Pine St	21st St	Westminster Av	3	AAC	E	2	1,228	30	39,870	82	11	12	77	1/6/2026	Surface Reconstruction - AC	9/6/2011
662	9830	Wee Wy	Nancy Lee Dr	Paul Dr	2	AC	E	2	241	33	5,768	82	14	86	0	12/17/2025	Surface Treatment - Slurry Seal	4/28/2014
291	4410	Hazelwood Cir	Tungwood St	End	5	AAC	E	2	600	36	20,144	82	12	88	0	1/9/2026	Overlay - AC Structural	1/1/2019
582	8721	Stahov Ave	Illinois St	End	3	AC	E	2	230	33	10,346	82	0	100	0	12/26/2025	New Construction - Initial	1/1/1980
61	1010	Bel Air Cir	Pensacola St	End	5	AAC	E	2	400	33	15,195	82	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
208	3120	Dumont Ln	Homer St	Wee Wy	2	AC	E	2	344	34	13,292	82	0	100	0	12/17/2025	Cold Mill and Overlay	3/17/2011
311	4811	Iowa St	21st St	End	3	AC	E	2	400	36	15,819	82	19	74	7	12/29/2025	New Construction - Initial	1/1/1980
70	1130	Bestal Ave	Edwards St	Siskiyou St	2	AC	E	2	1,397	33	43,399	82	54	46	0	1/2/2026	New Construction - Initial	1/1/1980
705	1680	Brookhurst St Frontage Rd	Banbury Ave	Margo Ln	6	AC	E	2	650	32	20,150	82	11	89	0	1/27/2026	New Construction - AC	1/1/1980
461	6930	Oasis Ave	Glitter St	Bushard St	4	AC	E	2	1,100	33	36,876	82	14	81	5	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
478	7290	Padres St	Thorpe Av	Bishop Av	5	AC	E	2	750	33	23,379	82	29	52	19	1/19/2026	New Construction - Initial	1/1/1980
556	8270	Satinwood Cir	Tungwood St	City Limit	5	AAC	E	2	600	37	22,492	82	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
599	8950	Sutter Dr	Klondike Av	Humboldt Av	2	AC	E	2	843	33	29,920	82	68	30	2	12/30/2025	New Construction - Initial	1/1/1980
606	9030	Tamarisk Cir	Eden St	End	5	AAC	E	2	450	33	15,399	82	0	100	0	1/7/2026	Overlay - AC Structural	12/30/2013
174	2740	Crockett Cir	Bowie St	End	5	AC	E	2	400	33	14,241	82	11	74	15	1/9/2026	Surface Treatment - Slurry Seal	4/28/2014
281	4200	Gumwood Cir	Wilson St	End	5	AAC	E	2	350	38	13,685	82	0	76	24	1/9/2026	Overlay - AC Structural	1/1/2019
311	4810	Iowa St	Trask Ave	21st St	3	AC	E	2	1,248	36	41,149	82	9	86	5	12/29/2025	Surface Treatment - Slurry Seal	7/13/2011
366	5590	Leo Pl	Lipkin Dr	Cardillo Dr	4	AAC	E	2	242	34	10,945	82	0	84	16	1/6/2026	Overlay - AC Structural	5/22/2017
385	5870	Manor Dr	19th St	21st St	4	AAC	E	2	603	34	20,468	82	0	93	7	1/6/2026	Overlay - AC Structural	1/30/2014
327	5080	Jon Wy	Chinook Av	Glacier Dr	2	AAC	E	2	257	33	8,693	82	40	60	0	12/8/2025	Overlay - AC Structural	1/1/2019
49	860	Balboa St	Lido Ave	Thorpe Ave	5	AC	E	2	785	35	28,086	82	22	78	0	1/19/2026	Cold Mill and Overlay	10/20/2008
122	2010	Carnation Dr	Highcliff St	Briarcliff St	6	AC	E	2	950	33	34,852	82	21	56	23	1/8/2026	New Construction - Initial	1/1/1980
202	3050	Dorothy Dr	Lee Dr	Melanie Ln	2	AC	E	2	1,146	33	38,819	82	47	43	10	12/16/2025	New Construction - Initial	1/1/1980
211	3170	Earl Cir	Duke Dr	End	6	AAC	E	2	120	33	5,951	82	0	95	5	1/12/2026	Overlay - AC Structural	6/26/2013
214	3210	Eden St	Mcfadden Ave	St Andrews Ave	5	AAC	E	2	885	33	31,140	82	0	70	30	1/7/2026	Overlay - AC Structural	12/30/2013
297	4490	Homer St	Nancy Lee Dr	Edwards St	2	AC	E	2	1,060	33	34,313	82	48	46	6	12/17/2025	New Construction - Initial	1/1/1980
537	8075	Rockview Cir	Rockview Cir	End	5	AC	E	2	96	45	5,192	82	0	41	59	1/9/2026	New Construction - Initial	1/1/1980
586	8750	Stengal St	Stern Av	End	6	AAC	E	2	320	33	13,647	82	37	63	0	1/28/2026	Surface Reconstruction - AC	9/6/2011
589	8800	Stinson Ln	Larkspur Dr	Bushard St	6	AC	E	2	400	33	13,270	82	21	74	5	1/19/2026	New Construction - Initial	1/1/1980
603	8990	Swan St	Westminster Av	Oasis Av	4	AC	E	2	1,122	36	35,784	82	14	75	11	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
30	590	Amidon Pl	Harper St	End	4	AC	E	2	300	33	10,610	82	11	89	0	1/7/2026	Surface Treatment - Slurry Seal	4/28/2014
109	1810	Butterfield St	Cloverdale Ave	City Limit	6	AAC	E	2	1,150	36	40,601	82	11	87	2	1/12/2026	Overlay - AC Structural	6/26/2013
165	2630	Concordia Pl	Syracuse St	End	3	AAC	E	2	453	33	16,672	82	19	59	22	1/20/2026	Overlay - AC Structural	6/26/2013
476	7210	Pacheco Ave	Padres Ave	End	5	AC	E	2	250	33	9,425	82	32	33	35	1/19/2026	New Construction - Initial	1/1/1980
19	470	Abraham Ave	Hammon Pl	Millan Ave	1	AC	E	2	1,114	33	38,423	82	36	51	13	12/1/2025	New Construction - Initial	1/1/1980
437	6520	Mooncrest St	Oasis St	End	4	AC	E	2	750	33	27,855	82	34	64	2	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
43	780	Aspenwood Ave	Newland	Wilson St	5	AAC	E	2	850	37	28,787	83	27	59	14	2/2/2026	Overlay - AC Structural	1/1/2019
124	2040	Cascade St	Mahogany Ave	End	2	AC	E	2	184	33	5,820	83	3	78	19	12/8/2025	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
341	5230	King Cir	Ambassador Dr	End	6	AC	E	2	350	33	12,744	83	16	84	0	2/2/2026	2" Conventional Overlay	4/21/2016
349	5370	La Pat Pl	Klondike Av	Humboldt Av	2	AC	E	2	845	33	29,950	83	36	42	22	12/17/2025	New Construction - Initial	1/1/1980
573	8500	Siskiyou St	Trask Av	Bestel Av	2	AC	E	2	728	33	22,735	83	30	56	14	12/17/2025	New Construction - Initial	1/1/1980
324	5030	Jennrich Ave	Moran St	Bushard St	4	AC	E	2	1,300	33	40,675	83	29	42	29	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
365	5570	Lehigh Pl	Temple St	End	3	AAC	E	2	390	33	16,592	83	43	57	0	1/20/2026	Overlay - AC Structural	12/30/2013
416	6220	Miami Ave	Riverton St	Riata St	4	AC	E	2	320	35	11,153	83	0	100	0	1/20/2026	New Construction - Initial	1/1/1980
430	6410	Mono Pl	Mohawk Rd	End	2	AC	E	2	168	33	8,361	83	0	98	2	12/16/2025	Cold Mill and Overlay	2/8/2010
528	7920	Riata St	Marion Ave	Miami Ave	4	AC	E	2	400	33	13,328	83	17	83	0	1/20/2026	New Construction - Initial	1/1/1980
630	9390	Tulipwood Cir	Tungwood St	End	5	AAC	E	2	600	36	20,795	83	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
658	9770	Washington Ave	Colleta Pl	End	5	AC	E	2	300	33	12,052	83	10	87	3	1/26/2026	Unknown Activity	1/1/2007
662	9840	Wee Wy	Dumont Ln	Denise Dr	2	AC	E	2	263	34	8,935	83	26	74	0	12/17/2025	Surface Treatment - Slurry Seal	4/28/2014
701	10570	Yuba Ave	Milan Av	Vallecito Dr	1	AC	E	2	617	34	21,057	83	0	100	0	12/1/2025	New Construction - Initial	1/1/1980
66	1060	Benton Ave	Jasperson Wy	Hoover St	3	AC	E	2	1,155	37	39,610	83	11	89	0	1/2/2026	Cold Mill and Overlay	2/8/2010
122	2020	Carnation Dr	Briarcliff St	Camelia Ln	6	AC	E	2	1,250	33	42,566	83	70	30	0	1/8/2026	New Construction - Initial	1/1/1980
9450	14130	Ledon Way	Pacific St	End	3	AC	E	0	236	33	10,037	83	0	77	23	1/20/2026	New Construction - Initial	1/1/1990
503	7600	Placer Ave	Milan Av	Vallecito Dr	1	AC	E	2	1,115	33	37,564	83	23	77	0	12/1/2025	New Construction - Initial	1/1/1980
297	4480	Homer St	Dumont Ln	Nancy Lee Dr	2	AC	E	2	553	33	17,456	83	50	50	0	12/17/2025	Cold Mill and Overlay	2/8/2010
592	8840	Strait Pl	Hazard Av	End	4	AC	E	2	550	33	20,302	83	0	94	6	1/20/2026	New Construction - Initial	1/1/1980
240	3620	Finchley Ave	Petsworth Ln	Golders Green Ln	6	AC	E	2	1,140	37	41,801	83	0	100	0	1/28/2026	Cold Mill and Overlay	2/8/2010
600	8960	Sutton St	Bersuch St	Bestel Av	2	AC	E	2	1,031	33	34,771	83	11	50	39	1/2/2026	New Construction - Initial	1/1/1980
71	1151	Bevan Ave	Poinsettia Wy	East End	6	AAC	E	2	525	33	19,105	83	0	53	47	1/14/2026	Surface Reconstruction - AC	11/26/2008
342	5240	Kingcross Rd	Blackpool Rd	Baker St	1	AC	E	2	655	34	22,405	83	42	57	1	11/25/2025	Cold Mill and Overlay	10/20/2008
466	7080	Ontario Dr	Hazard Av	Madison Av	5	AC	E	2	1,150	34	35,081	83	36	64	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
125	2060	Castle St	Salem Ave	Hazard Ave	4	AAC	E	2	600	33	18,033	83	16	84	0	1/21/2026	Surface Reconstruction - AC	9/6/2011
369	5620	Lipkin Dr	Westminster Av	Leo Pl	4	AAC	E	2	455	35	16,052	83	0	95	5	1/6/2026	Overlay - AC Structural	5/22/2017
471	7150	Orrey Pl	Moran St	End	4	AC	E	2	250	45	8,468	83	0	94	6	1/21/2026	New Construction - Initial	1/1/1980
155	2500	Cody Ave	Ord Wy	Bowie St	5	AC	E	2	300	33	12,826	83	40	60	0	2/2/2026	Cold Mill and Overlay	2/8/2010
427	6370	Mirror Cir	Mooncrest St	End	4	AC	E	2	220	33	8,568	83	14	86	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
438	6550	Moran St	Bolsa Av	End	5	AC	E	2	1,150	43	49,786	83	12	88	0	1/27/2026	2" Conventional Overlay	9/30/2015
552	8220	Sandalwood Cir	Tungwood St	City Limit	5	AAC	E	2	550	36	20,942	83	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2019
168	2660	Connie Wy	Margo Ln	Northampton Ave	6	AAC	E	2	200	36	7,927	83	36	49	15	1/27/2026	Overlay - AC Structural	6/26/2013
328	5090	Jones Ave	Meinhardt Rd	Paysen Dr	2	AC	E	2	796	34	27,033	83	73	27	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
652	9730	Walt St	Edwards St	Roxanne Dr	2	AC	E	2	750	34	24,445	83	42	53	5	12/17/2025	New Construction - Initial	1/1/1980
157	2535	Colgate Ave	Temple St	W End	3	AC	E	2	333	36	12,695	84	67	33	0	1/20/2026	New Construction - AC	1/1/1980
310	4780	Ingram Cir	Redlands St	End	5	AAC	E	2	450	36	17,457	84	0	31	69	1/21/2026	Overlay - AC Structural	1/1/2020
529	7950	Richardson Wy	21st St	19th St	4	AC	E	2	473	32	16,731	84	63	29	8	1/6/2026	New Construction - Initial	1/1/1980
86	1480	Bonnema St	Jennrich Ave	Kern Ave	4	AAC	E	2	750	34	23,810	84	0	100	0	1/21/2026	Surface Reconstruction - AC	9/6/2011
224	3450	Emerald Ave	Maybrook St	Plumwood St	5	AC	E	2	250	33	10,283	84	0	100	0	2/2/2026	Unknown Activity	4/1/2009
264	3930	Glenridge Ave	Briarcliff St	Highcliff St	6	AC	E	2	1,000	33	32,547	84	13	65	22	1/8/2026	New Construction - Initial	1/1/1980
322	5000	Jefferson St	20th St	23rd St	4	AAC	E	2	1,000	33	32,660	84	18	82	0	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
465	7060	Olympus Dr	Humboldt Av	Klondike Av	2	AC	E	2	865	33	28,974	84	22	78	0	12/30/2025	New Construction - Initial	1/1/1980
10	250	19th St	Beach Blvd	Monroe St	4	AC	E	2	1,201	33	39,425	84	12	65	23	1/7/2026	Surface Treatment - Slurry Seal	7/31/2011
124	2050	Cascade St	Camphor Ave	City Limits	2	AAC	E	2	662	33	20,004	84	22	78	0	12/8/2025	Overlay - AC Structural	1/1/2019
236	3580	Fairmont Cir	Fox Hills St	End	5	AAC	E	2	250	33	9,662	84	0	54	46	1/7/2026	Overlay - AC Structural	2/28/2022
487	7410	Paul Dr	Homer St	Wee Wy	2	AC	E	2	339	33	13,046	84	14	86	0	12/17/2025	Surface Treatment - Slurry Seal	4/28/2014
528	7930	Riata St	Oasis Ave	End	4	AC	E	2	500	33	16,949	84	40	60	0	1/19/2026	Cold Mill and Overlay	10/20/2008
550	8200	Salem Ave	Bonnema St	End	4	AAC	E	2	400	33	16,571	84	0	100	0	1/21/2026	Surface Reconstruction - AC	9/6/2011
554	8240	Santee Ave	Chestnut St	End	3	AAC	E	2	632	33	22,675	84	12	84	4	1/13/2026	Overlay - AC Structural	6/12/2013
94	1580	Bristol Cir	Banbury Av	End	6	AAC	E	2	200	37	10,937	84	0	100	0	2/2/2026	Overlay - AC Structural	6/26/2013
203	3060	Dorsey Cir	Iroquois Rd	End	2	AC	E	2	138	31	6,337	84	0	100	0	12/15/2025	New Construction - Initial	1/1/1980
222	3430	Emerado Cir	Jefferson St	End	4	AAC	E	2	150	27	5,835	84	0	89	11	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
265	3940	Glitter St	Oasis Ave	End	4	AC	E	2	820	36	29,411	84	14	70	16	1/21/2026	Surface Treatment - Slurry Seal	1/1/2019
337	5170	Kensington Ln	Parkview Av	Arundel Av	6	AC	E	2	470	33	18,313	84	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
346	5320	Klondike Ave	Tahoe St	Yosemite Dr	2	AC	E	2	250	33	9,634	84	37	49	14	12/30/2025	New Construction - Initial	1/1/1980
297	4500	Homer St	Goldenwest St	Dumont Ln	2	AC	C	2	1,099	33	42,740	84	46	54	0	12/17/2025	Cold Mill and Overlay	2/8/2010
324	5040	Jennrich Ave	Moran St	Magnolia St	4	AC	E	2	1,300	33	43,069	84	36	53	11	1/20/2026	Surface Treatment - Slurry Seal	1/1/2020
525	7880	Reading Ave	Goebel Ln	End	4	AAC	E	2	1,050	33	37,958	84	14	86	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
599	8940	Sutter Dr	Trask Av	Tillamook Av	2	AC	E	2	350	33	13,155	84	9	91	0	1/2/2026	Cold Mill and Overlay	10/20/2008
129	14060	Cedarwood Ave	Sugar Dr	End	3	AC	E	0	1,309	33	41,113	84	27	55	18	1/20/2026	New Construction - Initial	1/1/1990
16	410	24th St	Descanso Dr	End	4	AAC	E	2	704	33	27,334	84	0	95	5	1/5/2026	Overlay - AC Structural	1/1/2020

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
573	8510	Siskiyou St	Westpark Pl	Trask Av	2	AC	E 2	2	1,297	34	42,782	84	51	47	2	12/17/2025	New Construction - Initial	1/1/1980
586	8760	Stengal St	Stern Av	End	6	AAC	E 2	2	550	33	19,474	84	35	50	15	1/28/2026	Surface Reconstruction - AC	9/6/2011
613	9110	Thorpe Ave	Nantucket St	Balboa St	5	AC	E 2	2	200	35	9,368	84	36	64	0	1/19/2026	Cold Mill and Overlay	10/20/2008
700	10560	Yosemite Dr	Klondike Av	Humboldt Av	2	AC	E 2	2	838	33	28,918	84	0	61	39	12/30/2025	New Construction - Initial	1/1/1980
254	3840	Garland Cir	Cloverdale Ave	End	6	AAC	E 2	2	170	36	6,799	84	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
442	6600	Narcissus St	Calendula Av	McFadden Av	6	AC	E 2	2	600	40	18,845	84	12	88	0	1/13/2026	2" Conventional Overlay	3/25/2015
340	5220	Ketch Ave	Bowen St	End	6	AAC	E 2	2	400	33	15,500	84	0	100	0	1/28/2026	Surface Reconstruction - AC	9/6/2011
75	1190	Bird Ave	Bushard St	Erin Rd	5	AC	E 2	2	530	34	17,653	84	36	60	4	1/27/2026	New Construction - Initial	1/1/1980
243	3650	Fordham St	Cornell Ave	Darhmouth Ave	1	AC	E 2	2	183	33	8,500	84	57	43	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
432	6430	Monroe St	21st St	23rd St	4	AC	E 2	2	650	33	20,686	84	0	89	11	1/7/2026	Surface Treatment - Slurry Seal	7/13/2011
118	1970	Cardillo Dr	Leo St	Westminster Ave	4	AAC	E 2	2	488	34	16,894	85	17	80	3	1/6/2026	Overlay - AC Structural	5/22/2017
139	2250	Cheshire Ave	Wakefield St	Bromley St	5	AAC	E 2	2	950	34	33,048	85	25	75	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
393	5990	Marion Ave	Newland St	Riverton St	4	AC	E 2	2	450	34	14,815	85	19	81	0	1/20/2026	New Construction - Initial	1/1/1980
438	6530	Moran St	Jennrich Av	Hazard Av	4	AC	E 2	2	1,100	36	35,247	85	16	77	7	1/20/2026	Surface Treatment - Slurry Seal	1/1/2020
449	6760	Nevada St	Bestel Av	Benton Av	3	AC	E 2	2	618	33	20,949	85	31	67	2	1/5/2026	Cold Mill and Overlay	2/8/2010
454	6840	Northampton Ave	Maldstone St	Exeter St	6	AAC	E 2	2	800	37	33,425	85	0	100	0	1/27/2026	Overlay - AC Structural	6/26/2013
32	620	Anita Cir	Lehigh Pl	End	3	AAC	E 2	2	180	33	7,462	85	0	100	0	1/20/2026	Overlay - AC Structural	12/30/2013
36	710	Arvillia Cir	Jefferson St	End	4	AAC	E 2	2	150	27	5,761	85	0	100	0	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
288	4310	Hartford Wy	College St	Yankton Wy	1	AC	E 2	2	331	33	11,663	85	15	85	0	11/19/2025	Unknown Activity	8/30/2008
317	4925	Jackson St	McFadden Ave	Bishop Ave	3	AC	E 2	2	1,305	18	47,270	85	68	26	6	1/21/2026	New Construction - AC	1/1/1980
355	5450	Larkspur Dr	Canna St	Stinson Ln	6	AC	E 2	2	950	33	34,733	85	40	52	8	1/8/2026	New Construction - Initial	1/1/1980
504	7610	Plaza St	Olive St	Locust St	3	AC	E 2	2	1,280	53	64,224	85	54	46	0	1/13/2026	New Construction - Initial	1/1/1980
12	280	20th St	Beach Blvd	End	4	AC	E 2	2	1,721	33	53,818	85	13	85	2	1/7/2026	Surface Treatment - Slurry Seal	1/1/2019
585	8740	Starsia St	Jennrich Av	Hazard Av	4	AC	E 2	2	1,150	36	35,467	85	20	77	3	1/20/2026	Surface Treatment - Slurry Seal	1/1/2020
689	10410	Woodmere Cir	Candlewood St	End	6	AAC	E 2	2	250	36	9,182	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
166	2640	Condon Cir	Duke	End	6	AAC	E 2	2	250	33	10,002	85	0	96	4	1/12/2026	Overlay - AC Structural	6/26/2013
698	10530	Yermo Wy	Colleta Pl	End	5	AC	E 2	2	300	33	11,736	85	0	96	4	1/26/2026	Unknown Activity	1/1/2007
210	3150	Duquesne Pl	Syracuse St	End	3	AC	E 2	2	460	33	16,230	85	25	63	12	1/20/2026	New Construction - Initial	1/1/1980
1056	90063	East Dr	Bolsa Av	Mall	2	AC	E 4	2	220	58	6,761	85	54	46	0	12/9/2025	New Construction - Initial	1/1/1980
637	9540	Vallecito Dr	Milan Av	Placer Av	1	AC	E 2	2	1,231	34	43,407	85	31	69	0	12/1/2025	2" Conventional Overlay	4/21/2016
661	9810	Webster St	Natoma Av	Thorpe Av	5	AC	E 2	2	1,000	33	32,698	85	14	68	18	2/19/2026	New Construction - Initial	1/1/1980
59	990	Beechwood Cir	East End	Candlewood St	6	AAC	E 2	2	250	33	9,000	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
154	2480	Cloverdale Ave	Grey Oaks St	End	6	AAC	E 2	2	1,286	36	45,948	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
215	3220	Edgemont Cir	Fox Hills St	End	5	AAC	E 2	2	250	33	10,028	85	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
441	6580	Nantucket St	McFadden Av	Bermuda Av	5	AAC	E 2	2	100	35	4,476	85	0	100	0	1/7/2026	Overlay - AC Structural	2/28/2022
460	6920	Oakcliff Dr	McFadden Av	Coronet Av	6	AAC	E 2	2	1,150	36	41,265	85	13	82	5	1/14/2026	Surface Reconstruction - AC	11/26/2008
544	8160	Rutgers Ave	Vermont St	Lafayette St	3	AAC	E 2	2	432	38	17,218	85	42	58	0	12/10/2025	Overlay - AC Structural	1/1/2020
595	8880	Suffolk St	Rancho Rd	Blackpool Rd	1	AAC	E 2	2	1,671	30	59,212	85	0	85	15	11/25/2025	Surface Reconstruction - AC	9/6/2011
278	4160	Grey Oaks St	Duke Dr	Westwood Dr	6	AAC	E 2	2	535	36	20,284	85	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
322	4990	Jefferson St	Trask Ave	23rd St	4	AC	E 2	2	650	33	20,309	85	14	84	2	1/6/2026	New Construction - Initial	1/1/1980
370	5650	Locust St	Main St	Westminster Av	3	AC	E 2	2	1,236	44	51,072	85	68	21	11	1/13/2026	2" Conventional Overlay	4/21/2016
386	5900	Maple St	Olive St	End	3	AC	E 2	2	347	33	12,433	85	25	75	0	1/13/2026	New Construction - Initial	1/1/1980
214	3215	Eden St	Thorpe Ave	McFadden Ave	5	AAC	E 2	2	240	33	8,108	85	35	56	9	2/2/2026	Overlay - AC Structural	12/30/2013
560	8310	Seneca Dr	Iroquois Rd	Garden Grove Blvd	2	AAC	E 2	2	1,044	37	32,986	85	40	60	0	12/16/2025	Surface Reconstruction - AC	7/23/2010
7	140	15th St	Pacific Ave	Beach Blvd	4	AC	E 2	2	600	36	20,766	86	0	39	61	1/14/2026	New Construction - Initial	1/1/1980
1060	1940	Candlewood St	Cloverdale St	Westhaven St	6	AAC	E 2	2	1,070	36	37,901	86	0	100	0	1/12/2026	Surface Reconstruction - AC	9/6/2011
440	6571	Nancy Lee Dr	Homer St	End	2	AC	E 2	2	135	33	3,905	86	0	100	0	12/17/2025	Cold Mill and Overlay	3/17/2011
40	750	Ashford Ave	Sheffield St	Wakefield St	5	AAC	E 2	2	700	34	22,642	86	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
320	4960	Janice St	Dia Av	Jennrich Av	4	AAC	E 2	2	800	33	24,605	86	61	23	16	1/20/2026	Surface Reconstruction - AC	12/24/2010
551	8210	San Angelo Ave	Las Flores Av	Las Flores St	6	AAC	E 2	2	800	35	26,903	86	14	79	7	1/27/2026	Surface Reconstruction - AC	9/6/2011
615	9170	Tillamook Ave	Sutter Dr	Edwards St	2	AC	E 2	2	1,141	33	37,529	86	0	97	3	1/2/2026	Cold Mill and Overlay	10/20/2008
656	9755	Warren St	Kern Av	S End	4	AC	E 2	2	290	32	11,316	86	0	100	0	1/21/2026	2" Conventional Overlay	11/2/2015
74	1180	Bird Cir	Moran St	End	5	AC	E 2	2	420	33	16,130	86	0	89	11	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
123	2025	Carnegie Ave	Newland St	Bowie St	5	AC	E 2	2	196	36	5,605	86	0	96	4	1/9/2026	New Construction - AC	1/1/1980
128	2100	Cedar St	21st St	Westminster Ave	3	AAC	E 2	2	1,232	32	42,111	86	30	42	28	2/19/2026	Surface Reconstruction - AC	9/6/2011
355	5460	Larkspur Dr	Magnolia St	Canna St	6	AC	E 2	2	1,500	33	46,898	86	0	68	32	1/8/2026	New Construction - Initial	1/1/1980
543	543	Royal Pl	Parliament Av	Ambassador Dr	6	AC	E 2	2	250	33	8,885	86	15	85	0	2/2/2026	2" Conventional Overlay	4/21/2016
575	8540	Sloane Ave	Baker St	End	1	AC	E 2	2	196	34	7,043	86	52	48	0	11/25/2025	Cold Mill and Overlay	10/20/2008
605	9010	Tahoe St	Trask Av	Tillamook Av	2	AC	E 2	2	327	33	13,306	86	0	77	23	12/30/2025	Cold Mill and Overlay	10/20/2008
12	275	20th St	Richardson Wy	Pacific Ave	4	AC	E 2	2	467	33	15,129	86	57	43	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
339	5190	Kern Ave	Nola St	End	4	AAC	E	2	130	33	6,083	86	0	92	8	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
461	6940	Oasis Ave	Magnolia St	Glitter St	4	AC	E	2	1,400	33	46,482	86	19	74	7	1/20/2026	Surface Treatment - Slurry Seal	1/1/2019
140	2310	Chestnut St	Trask Ave	21st St	3	AC	E	2	1,242	33	41,764	86	0	70	30	12/26/2025	New Construction - Initial	1/1/1980
558	8290	Schooner Ave	Ward St	Bowen St	6	AC	E	2	400	33	14,186	86	54	46	0	1/28/2026	New Construction - Initial	1/1/1980
92	1560	Briarcliff St	Carnation Dr	Stoneridge Ave	6	AC	E	2	500	33	17,883	86	0	96	4	1/19/2026	New Construction - Initial	1/1/1980
296	4470	Highcliff St	Stoneridge Ave	Carnation Dr	6	AC	E	2	500	33	17,312	86	44	56	0	1/19/2026	New Construction - Initial	1/1/1980
573	8525	Siskiyou St	Hood Dr	Wheeler Av	2	AC	E	2	645	33	21,294	86	17	83	0	12/17/2025	Cold Mill and Overlay	10/20/2008
102	1740	Bucknell Cir	Colgate Ave	End	3	AC	E	2	150	32	6,647	86	0	44	56	2/20/2026	New Construction - Initial	1/1/1980
322	14120	Jefferson St	Worthy Dr	End	5	AC	E	0	278	33	9,601	86	40	27	33	1/9/2026	New Construction - Initial	1/1/1990
470	7130	Ord Wy	Edinger Av	Cody Av	5	AAC	E	2	150	33	6,361	86	0	81	19	2/2/2026	Surface Reconstruction - AC	2/8/2010
669	11530	Westminster Blvd Frontage Rd	End e/o Shirley St	End w/o Shirley St	4	AC	E	2	330	27	8,602	86	29	71	0	3/30/2026	New Construction - Initial	1/1/1980
192	2960	Descanso Dr	Trask Ave	24th St	4	AAC	E	2	471	34	16,250	86	20	80	0	1/5/2026	Overlay - AC Structural	1/1/2020
205	3090	Downing Cir	End	End	6	AC	E	2	1,050	33	38,622	86	30	53	17	1/13/2026	Cold Mill and Overlay	10/20/2008
218	3280	Edita Ave	Hammon Pl	Milan Ave	1	AC	E	2	1,117	33	37,429	86	0	100	0	12/1/2025	New Construction - Initial	1/1/1980
365	5580	Lehigh Pl	Temple St	End	3	AAC	E	2	702	33	26,623	86	0	100	0	1/20/2026	Overlay - AC Structural	12/30/2013
464	7030	Olive St	21st St	Trask Av	3	AC	E	2	1,260	33	41,281	86	14	58	28	12/29/2025	New Construction - Initial	1/1/1980
684	10330	Wilson St	Lomay Av	Conner Cir	4	AC	E	2	1,800	33	60,475	86	28	68	4	1/7/2026	Cold Mill and Overlay	2/1/2010
45	800	Auburn Cir	Milan St	End	1	AC	E	2	313	33	12,136	86	45	20	35	12/1/2025	Surface Treatment - Slurry Seal	7/13/2011
271	4080	Gonzaga Pl	Syracuse St	End	3	AAC	E	2	452	33	16,308	86	0	100	0	1/21/2026	Overlay - AC Structural	6/26/2013
388	5930	Margate Cir	Oakcliff Dr	End	6	AC	E	2	400	33	15,236	86	0	93	7	1/14/2026	Cold Mill and Overlay	2/1/2010
9500	14180	Pacific St	Harhay Ave	McFadden Ave	3	AC	E	0	1,171	33	36,949	86	17	34	49	1/20/2026	New Construction - Initial	1/1/1990
515	7770	Pyle Cir	Moran St	End	5	AC	E	2	420	33	16,520	86	0	100	0	1/21/2026	Surface Treatment - Slurry Seal	1/1/2020
9650	14200	Rockwell Ave	Pacific St	Beach Blvd	3	AC	E	0	585	33	15,198	86	25	44	31	1/20/2026	New Construction - Initial	1/1/1990
675	10160	Wheaton Cir	Vermont St	End	3	AAC	E	2	180	33	8,454	86	0	100	0	12/10/2025	Overlay - AC Structural	1/1/2020
676	10170	Wheeler Ave	Estes Cir	Siskiyou St	2	AC	E	2	518	33	15,643	86	14	86	0	12/17/2025	Cold Mill and Overlay	10/20/2008
315	4880	Iroquois Rd	Klamath Dr	Springdale St	2	AAC	E	2	1,592	33	49,064	87	35	65	0	12/16/2025	Surface Reconstruction - AC	7/23/2010
432	14160	Monroe St	Worthy Dr	City Limit	5	AC	E	0	122	33	3,639	87	64	36	0	1/9/2026	New Construction - Initial	1/1/1990
656	9750	Warren St	Jennrich Av	Kern Av	4	AC	E	2	680	32	22,461	87	0	100	0	1/21/2026	2" Conventional Overlay	11/2/2015
597	8920	Sunnyvale Ave	Trask Av	End	4	AAC	E	2	300	33	9,515	87	0	100	0	1/6/2026	Surface Reconstruction - AC	9/6/2011
516	7780	Quartz St	Palos Verde Av	Edinger Av	5	AC	E	2	1,385	33	43,172	87	29	66	5	1/7/2026	New Construction - Initial	1/1/1980
108	1800	Butte St	Sinclair Ave	Sabre Ln	5	AC	E	2	250	33	8,794	87	19	74	7	1/26/2026	Unknown Activity	2/28/2008
322	14110	Jefferson St	Worthy Dr	End	5	AC	E	0	308	33	11,332	87	42	16	42	1/9/2026	New Construction - Initial	1/1/1990
498	7530	Piccadilly Cir	Kingcross Rd	Round About	1	AC	E	2	1,479	30	39,977	87	70	30	0	11/25/2025	Cold Mill and Overlay	2/8/2010
9750	14250	Worthy Dr	Worthy Dr	End	5	AC	E	0	1,344	33	43,751	87	49	42	9	1/9/2026	New Construction - Initial	1/1/1990
64	1040	Belty Cir	Erin Rd	End	5	AAC	E	2	220	34	10,772	87	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
316	4890	Ixworth Pl	Baker St	End	1	AC	E	2	190	19	3,795	87	0	85	15	11/25/2025	Cold Mill and Overlay	10/20/2008
684	14240	Wilson St	McFadden Ave	Worthy Dr	5	AC	E	0	1,156	33	36,174	87	35	45	20	1/9/2026	New Construction - Initial	1/1/1990
140	2275	Chestnut St	Main St	Park St	3	AC	C	2	475	53	18,665	87	21	79	0	1/13/2026	Unknown Activity	1/1/2008
9450	14140	Ledon Way	Cedarwood Ave	End	3	AC	E	0	326	33	13,005	87	17	62	21	1/20/2026	New Construction - Initial	1/1/1990
472	7160	Orwell Ave	Jenner St	Quartz St	1	AC	E	2	1,263	36	47,923	87	0	50	50	1/5/2026	New Construction - Initial	1/1/1980
637	9530	Vallecito Dr	Placer Av	Abraham Av	1	AC	E	2	1,182	34	35,364	87	0	70	30	12/1/2025	2" Conventional Overlay	4/21/2016
700	10550	Yosemite Dr	Trask Av	Tillamook Av	2	AC	E	2	328	33	12,561	87	0	100	0	12/30/2025	Cold Mill and Overlay	10/20/2008
246	3680	Fox Hills St	Bermuda Ave	Palos Verde Ave	5	AAC	E	2	900	36	32,767	87	0	84	16	1/7/2026	Overlay - AC Structural	2/28/2022
402	6070	Maybrook St	Emerald Av	Edinger Av	5	AC	E	2	1,139	33	37,395	87	18	82	0	1/7/2026	Unknown Activity	4/1/2009
531	7980	Riverton Cir	Jennrich Av	End	4	AC	E	2	300	33	12,458	87	0	100	0	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
609	9060	Temple St	City Limit	Bolsa Av	3	AAC	E	2	1,221	36	44,370	87	51	49	0	1/20/2026	Overlay - AC Structural	12/30/2013
13	330	21st St	Beach Blvd	Monroe St	4	AC	E	2	1,211	33	39,627	87	0	90	10	1/7/2026	New Construction - Initial	1/1/1980
14	350	22nd St	Beach Blvd	Monroe St	4	AC	E	2	1,206	33	37,697	87	0	96	4	1/7/2026	New Construction - Initial	1/1/1980
207	3110	Duke Dr	Grey Oaks St	Empire Ln	6	AAC	E	2	1,100	36	39,468	87	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
13	300	21st St	Hoover St	Cherry St	3	AC	C	2	1,446	36	51,936	88	34	62	4	12/26/2025	Surface Treatment - Slurry Seal	7/13/2011
15	380	23rd St	Arizona St	Hoover St	4	AAC	E	2	729	37	28,172	88	43	57	0	1/5/2026	Overlay - AC Structural	3/25/2010
146	2390	Church St	Plaza St	Park St	3	AC	E	2	320	54	16,976	88	14	86	0	1/13/2026	New Construction - Initial	1/1/1980
557	8280	Sawston Cir	Horsham Av	End	1	AC	E	2	473	37	18,548	88	13	54	33	11/25/2025	New Construction - Initial	1/1/1980
34	660	Archway Rd	Hazard Ave	Bellehurst Ave	6	AC	E	2	120	37	3,802	88	0	100	0	1/28/2026	New Construction - Initial	1/1/1980
226	3480	Empire Ln	Duke Dr	Westwood Dr	6	AAC	E	2	200	36	9,295	88	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
237	3590	Feltham Cir	Orwell Ave	End	1	AC	E	2	500	36	17,434	88	0	40	60	1/5/2026	New Construction - Initial	1/1/1980
691	10430	Wynant St	Trask Av	End	4	AAC	E	2	300	33	9,640	88	0	100	0	1/6/2026	Surface Reconstruction - AC	9/6/2011
48	840	Baker St	Vauxhall Rd	End	1	AC	E	2	1,007	35	33,936	88	17	83	0	11/25/2025	Cold Mill and Overlay	2/8/2010
9300	14070	Darwin Ave	Cedarwood Ave	Pacific St	3	AC	E	0	610	33	18,940	88	40	52	8	1/20/2026	New Construction - Initial	1/1/1990
467	7090	Onyx Ave	Quartz St	Plumwood St	5	AC	E	2	250	33	6,828	88	0	100	0	1/7/2026	Unknown Activity	4/1/2009

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
72	1160	Beverly Ln	Hortense Dr	Irene Wy	6	AAC	E	2	600	33	19,890	88	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
1054	2440	Clarendon St	Cloverdale Av	City Limit	6	AAC	E	2	1,000	36	31,843	88	0	100	0	1/12/2026	Overlay - AC Structural	6/26/2013
285	4260	Hampton Ct	Bolsa Chica Rd	Baker St	1	AC	E	2	930	30	27,043	88	0	96	4	11/25/2025	Cold Mill and Overlay	2/18/2010
287	4300	Harper St	Lomay Ave	23rd St	4	AC	E	2	1,600	33	50,060	88	17	71	12	1/7/2026	Cold Mill and Overlay	2/1/2010
406	10905	McFadden Ave Frontage Rd	McFadden Av	Hortense Dr	6	AC	E	2	750	26	18,830	88	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
548	8680	Saint James Pk	Bolsa Chica Rd	Baker St	1	AC	E	2	255	30	8,169	88	49	51	0	11/25/2025	Cold Mill and Overlay	2/8/2010
564	8380	Sheffield St	Hazard Av	Chesire Av	5	AAC	E	2	600	34	22,789	88	16	84	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
641	9580	Vauxhall Rd	Baker St	Bolsa Chica Rd (Frontage)	1	AAC	E	2	187	19	3,049	88	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
695	10490	Yale Ave	Claremont St	University St	1	AC	E	2	511	33	17,205	88	19	81	0	11/19/2025	Surface Treatment - Slurry Seal	6/14/2010
404	6140	McClure Ave	Magnolia St	Straight St	4	AAC	E	2	400	33	16,250	88	0	94	6	1/20/2026	Surface Reconstruction - AC	12/24/2010
628	9360	Tufton St	Blackpool Rd	Saint George Rd	1	AAC	E	2	712	30	21,939	88	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
681	10230	Willamette Dr	Trask Av	Tillamook Av	2	AC	E	2	360	33	12,000	88	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
480	7310	Palomar St	Trask Av	Tillamook Av	2	AC	E	2	360	33	12,534	88	0	100	0	1/2/2026	Surface Treatment - Slurry Seal	6/14/2010
500	7550	Pimlico Rd	Victoria Pl	Hampton Ct	1	AAC	E	2	493	31	16,199	88	19	81	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
242	3640	Florence Ave	Ward St	Las Solanas St	6	AAC	E	2	360	35	10,789	88	19	81	0	2/2/2026	Surface Reconstruction - AC	9/6/2011
221	3390	Elystan Cir	Ixworth Pl	End	1	AC	E	2	390	30	13,736	88	0	75	25	11/25/2025	Cold Mill and Overlay	10/20/2008
505	7620	Plumwood St	Emerald Av	END	5	AC	E	2	1,050	33	33,697	88	0	96	4	1/7/2026	Unknown Activity	4/1/2009
38	730	Ashbury Cir	End	End	6	AC	E	2	1,050	33	39,197	89	0	81	19	1/13/2026	Cold Mill and Overlay	10/20/2008
356	5470	Las Flores St	San Angelo Av	End	6	AAC	E	2	651	36	23,390	89	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
383	5820	Main St	Hoover St	Chestnut St	3	AC	E	2	1,268	53	67,391	89	18	78	4	1/13/2026	2" Conventional Overlay	4/21/2016
433	6480	Monterey Cir	Eden St	End	5	AAC	E	2	450	33	15,206	89	0	100	0	1/7/2026	Overlay - AC Structural	12/30/2013
126	2080	Cavendish St	Blackpool Rd	Kingcross Rd	1	AC	E	2	350	20	6,807	89	32	68	0	11/25/2025	Cold Mill and Overlay	10/20/2008
231	90058	Erin Rd	Bird Av	Belty Cir	5	AAC	E	2	240	34	8,729	89	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
315	4850	Iroquois Rd	Seneca Dr	Klamath Dr	2	AC	E	2	518	34	17,071	89	0	100	0	12/16/2025	New Construction - Initial	1/1/1980
359	5500	Las Solonas St	Florence Av	San Angelo Av	6	AAC	E	2	300	35	13,839	89	18	82	0	2/2/2026	Surface Reconstruction - AC	9/6/2011
593	8850	Strait St	McClure Av	Jennrich Av	4	AAC	E	2	300	33	9,805	89	0	100	0	1/20/2026	Surface Reconstruction - AC	12/24/2010
133	2170	Charing Cross Rd	Victorio Pl	Suffolk St	1	AAC	E	2	622	30	18,851	89	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
529	7940	Richardson Wy	24th St	Trask Av	4	AAC	E	2	468	34	14,719	89	0	100	0	1/5/2026	Overlay - AC Structural	1/1/2020
104	1760	Burning Tree St	Palos Verde Ave	McFadden Ave	5	AC	E	2	1,150	36	39,211	89	19	56	25	1/7/2026	Cold Mill and Overlay	10/20/2008
229	3510	England Ave	Bushard St	End	6	AC	E	2	1,200	36	42,115	89	31	21	48	1/13/2026	Cold Mill and Overlay	10/20/2008
9350	14080	Flight Ave	Van Buren St	End	5	AC	E	0	192	33	8,550	89	0	77	23	1/21/2026	New Construction - Initial	1/1/1990
687	10360	Windsor Ave	Sheffield St	Wakefield St	5	AAC	E	2	700	33	24,100	89	0	86	14	1/27/2026	Surface Reconstruction - AC	9/6/2011
19	460	Abraham Ave	Hammon Pl	End	1	AC	E	2	813	33	27,545	89	0	71	29	12/1/2025	2" Conventional Overlay	4/21/2016
238	10750	Fenway Dr	Goldenwest St	End	3	AAC	E	2	1,240	32	50,089	89	0	12	88	1/2/2026	Overlay - AC Structural	9/15/2023
302	4630	Hortense Dr	Beverly Ln	Gretchen Ln	6	AAC	E	2	567	33	18,280	89	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
346	5330	Klondike Ave	Willamette Dr	La Pat Pl	2	AC	E	2	623	33	19,295	89	20	80	0	12/17/2025	New Construction - Initial	1/1/1980
426	6365	Mirage Ave	Bushard St	W End	4	AC	E	2	195	32	9,137	89	0	36	64	1/21/2026	New Construction - AC	1/1/1980
621	9240	Torrington Cir	Ward St	End	6	AC	E	2	400	45	16,702	89	39	61	0	1/28/2026	New Construction - Initial	1/1/1980
58	980	Belford Ln	Oasis Ave	Reading Ave	4	AAC	E	2	270	33	8,638	89	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
9350	14090	Flight Ave	Monroe St	Wilson St	5	AC	E	0	565	33	16,834	89	34	32	34	1/9/2026	New Construction - Initial	1/1/1990
302	4635	Hortense Dr	McFadden Ave	Beverly Ln	6	AC	E	2	283	33	10,118	89	20	66	14	1/27/2026	New Construction - Initial	1/1/1980
309	4770	Industry Wy	Old Edwards St	End	2	AC	C	2	687	45	32,655	89	0	100	0	12/9/2025	New Construction - Initial	1/1/1980
444	6635	Natoma Ave	Eden St	Coronado St	5	AC	E	2	916	33	29,082	89	61	39	0	1/14/2026	New Construction - Initial	1/1/1980
80	1290	Blackpool Rd	Victoria Pl	Suffolk St	1	AC	E	2	1,189	28	32,689	89	0	52	48	11/25/2025	Cold Mill and Overlay	10/20/2008
317	4910	Jackson St	Trask Ave	23rd St	4	AC	E	2	600	36	22,079	89	30	62	8	1/6/2026	New Construction - Initial	1/1/1980
386	5880	Maple St	Olive St	Village Wy	3	AC	E	2	915	60	49,442	89	0	86	14	1/13/2026	Unknown Activity	1/1/2007
78	1240	Bishop St	Moran St	Bushard St	6	AC	C	2	1,200	36	43,332	89	21	79	0	2/19/2026	Cold Mill and Overlay	3/10/2011
684	10310	Wilson St	Hazard Av	End	4	AC	E	2	350	33	11,001	89	21	79	0	1/19/2026	Cement Treated Base	9/30/2015
103	1750	Burgess Cir	Orwell Ave	End	1	AC	E	2	400	33	13,568	90	0	56	44	1/5/2026	New Construction - AC	1/1/1980
419	6250	Middletown Ln	Newland St	Monroe Ln	4	AC	E	2	1,600	33	53,746	90	0	65	35	1/19/2026	Cold Mill and Overlay	10/20/2008
9600	14190	Peters Ave	Monroe St	Wilson St	5	AC	E	0	565	33	16,010	90	0	82	18	1/9/2026	New Construction - Initial	1/1/1990
71	1150	Bevan Ave	Poinsettia Wy	West End	6	AAC	E	2	525	33	19,378	90	0	100	0	1/14/2026	Surface Reconstruction - AC	11/26/2008
80	1280	Blackpool Rd	Suffolk St	Cavendish St	1	AC	E	2	716	30	20,448	90	21	79	0	11/25/2025	Cold Mill and Overlay	10/20/2008
547	8710	Saint George Rd	Blackpool Rd	Tufton St	1	AAC	E	2	402	30	12,828	90	0	100	0	11/25/2025	Surface Reconstruction - AC	9/6/2011
100	1720	Bryant Cir	Milan St	End	1	AC	E	2	531	33	19,365	90	53	37	10	12/1/2025	Surface Treatment - Slurry Seal	7/13/2011
169	2670	Cordaway Ave	Maybrook St	Plumwood St	5	AC	E	2	250	33	7,123	90	0	100	0	2/2/2026	Unknown Activity	4/1/2009
357	5480	Las Lunas St	San Angelo Av	End	6	AAC	E	2	520	35	17,383	90	0	100	0	2/2/2026	Surface Reconstruction - AC	9/6/2011
614	9140	Tilden St	McClure Av	End	4	AAC	E	2	200	33	6,439	90	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
681	10250	Willamette Dr	Humboldt Av	Klondike Av	2	AC	E	2	851	33	29,129	90	0	100	0	12/17/2025	New Construction - Initial	1/1/1980
227	3490	Encinas Cir	Richardson Wy	End	4	AAC	E	2	218	33	9,739	90	0	100	0	1/5/2026	Overlay - AC Structural	1/1/2020

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
339	5200	Kern Ave	Bushard St	Bonnema St	4	AC	E	2	450	33	13,838	90	0	100	0	1/21/2026	2" Conventional Overlay	11/2/2015
358	5490	Las Nubes St	San Angelo Av	End	6	AAC	E	2	520	35	18,295	90	0	97	3	1/27/2026	Surface Reconstruction - AC	9/6/2011
15	360	23rd St	Richardson Wy	Pacific Ave	4	AC	E	2	480	32	15,507	90	58	42	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
339	5210	Kern Ave	Moran St	Castle St	4	AC	E	2	460	33	14,810	90	0	96	4	1/21/2026	New Construction - Initial	1/1/1980
704	670	Arizona St	Bestal Ave	Benton Ave	3	AC	E	2	591	33	19,671	90	26	68	6	1/5/2026	Cold Mill and Overlay	2/2/2008
251	3750	Galway St	Hazard Ave	Bird Ln	5	AAC	E	2	550	34	17,380	90	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
313	4830	Irene Wy	Beverly Ln	Margo Ln	6	AAC	E	2	850	33	28,325	90	0	95	5	1/27/2026	Overlay - AC Structural	2/28/2022
531	7990	Riverton Cir	Oasis Av	End	4	AC	E	2	500	33	16,784	90	26	74	0	1/19/2026	Cold Mill and Overlay	10/20/2008
9650	14210	Rockwell Ave	Cedarwood Ave	End	3	AC	E	0	326	33	12,800	90	25	61	14	1/20/2026	New Construction - Initial	1/1/1990
617	9190	Titus St	Jennrich Av	Hazard Av	4	AAC	E	2	1,150	36	36,302	90	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
680	10210	Whitney Cir	Bestel Av	End	2	AC	E	2	423	33	15,351	90	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
303	4640	Hospital Cir	S/O 21ST ST @ W/E	N/O 21ST ST @ E/E	4	AC	C	2	720	35	25,009	90	0	100	0	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
303	4650	Hospital Cir	N/O 21ST ST @ E/E	S/O 21ST ST @ W/E	4	AC	C	2	1,354	35	49,409	90	24	69	7	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
672	10130	Weststate St	Bishop Pl	Bolsa Av	6	AC	C	2	1,250	45	55,554	90	0	80	20	2/25/2026	New Construction - Initial	1/1/1980
496	7500	Pepperwood Cir	Dogwood St	End	5	AAC	E	2	500	36	17,572	90	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
693	10450	Wyoming St	Arizona St	Hoover St	4	AC	C	2	827	36	29,229	90	0	18	82	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
199	3030	Dogwood St	Aspenwood Ave	Torchwood Cir	5	AAC	E	2	1,100	33	40,033	90	0	70	30	1/9/2026	Overlay - AC Structural	1/1/2020
479	7300	Pal Wy	Cedar St	End	3	AAC	E	2	300	33	11,259	90	0	100	0	1/2/2026	Overlay - AC Structural	3/25/2010
486	7400	Patrice Ave	Margo Ln	Gretchen Ln	6	AAC	E	2	200	33	8,494	90	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
620	9230	Torchwood Cir	Wilson St	End	5	AAC	E	2	750	36	27,396	90	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
514	7730	Purdy St	Oasis Ave	End	4	AC	E	2	500	33	16,318	91	0	100	0	1/19/2026	Cold Mill and Overlay	10/20/2008
615	9160	Tillamook Ave	Taoe St	Olympus Dr	2	AC	E	2	603	33	20,079	91	44	52	4	12/30/2025	Cold Mill and Overlay	10/20/2008
108	1790	Butte St	McClure Ave	End	4	AAC	E	2	200	33	6,409	91	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
567	8410	Shirley St	Dia Av	Jennrich Av	4	AAC	E	2	750	33	26,207	91	23	77	0	1/20/2026	Surface Reconstruction - AC	12/24/2010
76	1200	Birmingham Dr	Churchill Av	End	1	AC	E	2	658	34	24,931	91	31	69	0	11/25/2025	Surface Treatment - Slurry Seal	7/13/2011
334	2070	Kathy St	Sowell Av	End	3	AAC	E	2	460	31	15,236	91	24	76	0	1/13/2026	Overlay - AC Structural	6/12/2013
372	5680	Lotus Dr	Poinsettia Wy	Camelia Ln	6	AAC	E	2	500	33	15,849	91	0	100	0	1/20/2026	Overlay - AC Structural	2/28/2022
390	5960	Marie Pl	Beverly Ln	Gretchen Ln	6	AAC	E	2	600	33	18,299	91	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
151	2450	Clark Cir	Milan st	End	1	AC	E	2	749	33	25,665	91	0	68	32	12/1/2025	Surface Treatment - Slurry Seal	7/13/2011
460	6910	Oakcliff Dr	McFadden Av	Carnation Dr	6	AC	E	2	300	33	9,111	91	23	77	0	1/19/2026	New Construction - Initial	1/1/1980
9500	14170	Pacific St	Bolsa Ave	End	3	AC	E	0	602	32	19,743	91	28	72	0	1/21/2026	New Construction - Initial	1/1/1990
273	4100	Grambling Cir	Northwestern Wy	End	1	AC	E	2	235	30	10,043	91	0	53	47	11/19/2025	Unknown Activity	8/30/2008
389	5950	Margo Ln	Irene Wy	Brookhurst St	6	AC	E	2	1,050	33	34,593	91	19	43	38	1/27/2026	New Construction - Initial	1/1/1980
160	2580	Colonial Dr	Hazard Ave	Williamsburg Ave	5	AAC	E	2	530	33	16,929	91	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
231	3530	Erin Rd	Bird Av	North End	5	AAC	E	2	420	34	15,578	91	0	100	0	1/27/2026	Surface Reconstruction - AC	9/6/2011
517	7800	Queen Cir	Parliament Av	End	6	AC	E	2	250	33	8,501	91	0	93	7	2/2/2026	2" Conventional Overlay	4/21/2016
678	10190	White Cir	Meinhardt Rd	End	2	AC	E	2	114	34	5,715	91	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
48	850	Baker St	Vauxhall Rd	Victorio Pl	1	AC	E	2	1,408	35	46,993	91	26	73	1	11/25/2025	Cold Mill and Overlay	2/8/2010
277	4150	Gretchen Ln	Irene Wy	Patrice Ave	6	AAC	E	2	752	33	25,784	91	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
555	8260	Sapphire Ave	Quartz St	Diamond St	5	AC	E	2	800	33	26,035	91	0	100	0	1/7/2026	New Construction - Initial	1/1/1980
77	1210	Bishop Ave	Webster St	End	5	AC	E	2	500	33	17,600	91	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
200	3040	Donegal Dr	Sabre Ave	City Limit	5	AC	E	2	405	34	14,334	91	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
9000	13010	Sutherland Wy	Bushard St	End (W)	4	AC	E	2	200	33	9,333	91	0	19	81	1/21/2026	Surface Treatment - Slurry Seal	4/28/2014
583	8870	Stanyan Cir	Channing Ave	End	5	AC	E	2	120	30	5,904	91	0	49	51	1/26/2026	2" Conventional Overlay	11/2/2015
704	680	Arizona St	Hospital Cir	Trask Ave	4	AC	C	2	770	37	29,806	92	46	54	0	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
195	2990	Dia Ave	Purdy St	Shirley St	4	AAC	E	2	550	33	17,843	92	27	73	0	1/20/2026	Surface Reconstruction - AC	12/24/2010
274	4120	Greasewood Cir	Dogwood St	End	5	AAC	E	2	500	36	17,122	92	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
682	10260	Williamsburg Ave	Colonial Dr	End	5	AAC	E	2	750	33	32,571	92	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
233	3550	Estes Cir	Hood Dr	End	2	AC	E	2	521	33	20,155	92	0	100	0	12/17/2025	Cold Mill and Overlay	10/20/2008
562	8340	Shasta Cir	Bestel Av	End	2	AC	E	2	400	33	14,877	92	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
33	640	Apache Rd	Seneca Dr	Edwards St	2	AC	E	2	974	33	42,973	92	31	69	0	12/16/2025	Cold Mill and Overlay	3/10/2011
474	7180	Oso Wy	Cedar St	End	3	AAC	E	2	175	33	7,865	92	0	100	0	1/2/2026	Overlay - AC Structural	3/25/2010
489	7430	Peachwood Cir	Dogwood St	Newland St	5	AAC	E	2	500	37	18,967	92	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
343	5250	Kiowa Rd	Cheyenne Dr	Cayuga Dr	2	AC	E	2	846	33	25,610	92	32	68	0	12/16/2025	Cold Mill and Overlay	3/10/2011
378	5750	Madison Ave	Colleta Pl	End	5	AC	E	2	300	33	11,591	92	0	88	12	1/26/2026	Unknown Activity	1/1/2007
404	6120	McClure Ave	Titus St	End	4	AAC	E	2	700	33	25,125	92	0	100	0	1/20/2026	Surface Reconstruction - AC	9/6/2011
696	10510	Yankton Wy	Northwestern Wy	End	1	AC	E	2	289	37	13,836	92	0	90	10	11/19/2025	Unknown Activity	8/30/2008
23	520	Allison Cir	Meinhardt Rd	End	2	AC	E	2	313	33	12,647	92	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
471	7140	Orrey Pl	Nola St	End	4	AAC	E	2	130	33	6,262	92	0	95	5	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
75	1195	Bird Ave	Erin Rd	Donegal Dr	5	AC	E	2	230	34	6,493	92	0	100	0	1/27/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
407	6110	McKinley Cir	Bestel Av	End	2	AC	E 2	396	33		15,326	92	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
455	6860	Northwestern Wy	Bolsa Chica Rd	End	1	AC	E 2	685	37		32,064	93	0	88	12	11/19/2025	Unknown Activity	8/30/2008
644	9630	Victoria Pl	Suffolk St	Blackpool Rd	1	AC	E 2	753	27		21,120	93	35	57	8	11/25/2025	Cold Mill and Overlay	10/20/2008
69	1100	Bersuch St	Bestel Ave	Sutton St	2	AC	E 2	362	33		13,959	93	0	100	0	1/2/2026	Unknown Activity	5/15/2008
521	7840	Rainier Cir	Bestel Av	End	2	AC	E 2	393	33		14,917	93	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
70	1140	Bestal Ave	Chestnut St	Goldenwest St	3	AC	E 2	1,400	32		44,328	93	41	59	0	12/29/2025	Surface Treatment - Slurry Seal	7/13/2011
187	2890	Day Pl	Bestel Ave	End	2	AC	E 2	174	33		6,787	93	0	100	0	1/2/2026	Cold Mill and Overlay	10/20/2008
525	13000	Reading Ave	Bushard St	End (W)	4	AAC	E 2	200	33		9,121	93	0	23	77	1/21/2026	Surface Treatment - Slurry Seal	4/28/2014
526	7890	Redlands St	Carnegie Av	Furman Av	5	AAC	E 2	800	37		31,789	93	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
55	950	Barney St	Meinhardt Rd	End	2	AC	E 2	1,410	33		46,915	93	0	100	0	12/15/2025	New Construction - Initial	1/1/1980
257	3870	Gary St	Kathy St	End	3	AAC	E 2	115	34		3,366	93	0	100	0	1/13/2026	Overlay - AC Structural	6/12/2013
625	9330	Trini Cir	Magnolia St	End	6	AAC	E 2	150	33		7,256	93	0	100	0	2/2/2026	Overlay - AC Structural	2/28/2022
349	5360	La Pat Pl	Westminster Av	La Pat Ct	2	AC	E 2	581	33		19,863	93	0	93	7	12/17/2025	2" Conventional Overlay	4/21/2016
649	9680	Wakefield St	Windsor Av	Cornwall Av	5	AAC	E 2	650	32		23,897	93	0	100	0	6/12/2026	Surface Reconstruction - AC	9/6/2011
336	5160	Kennedy Wy	Bushard St	END	5	AC	E 2	625	27		16,409	93	0	100	0	1/27/2026	Surface Treatment - Slurry Seal	1/1/2019
311	4790	Iowa St	Wyoming St	South End	3	AC	E 2	480	26		14,910	93	0	44	56	1/6/2026	New Construction - Initial	1/1/1980
156	2510	Colchester Ave	Yarborough St	End	5	AC	E 2	450	32		16,705	93	0	93	7	1/26/2026	2" Conventional Overlay	11/2/2015
14	340	22nd St	Richardson Wy	Pacific Ave	4	AC	E 2	476	32		15,778	93	55	45	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
537	8070	Rockview Cir	Monroe St	W End	5	AAC	E 2	510	37		19,918	93	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
343	5270	Kiowa Dr	Cayuga Dr	Edwards St	2	AC	E 2	1,099	34		38,567	94	0	100	0	12/16/2025	Cold Mill and Overlay	3/10/2011
379	5770	Madison Cir	Bushard St	End	5	AC	E 2	650	37		24,698	94	0	100	0	1/27/2026	Surface Treatment - Slurry Seal	1/1/2019
245	3670	Fowler Cir	Brookhurst St	End	6	AAC	E 2	600	33		22,379	94	0	100	0	1/27/2026	Overlay - AC Structural	2/28/2022
697	10520	Yarborough St	Channing Av	End	5	AC	E 2	604	36		22,292	94	0	70	30	1/26/2026	2" Conventional Overlay	11/2/2015
549	8690	Saint Marys Cir	University St	End	1	AC	E 2	370	33		14,028	94	0	80	20	11/19/2025	2" Conventional Overlay	4/21/2016
646	9650	Villanova Cir	Carnegie Av	Furman Av	5	AAC	E 2	600	33		20,405	94	3	75	22	1/9/2026	Overlay - AC Structural	1/1/2020
488	7420	Payson Dr	Jones Av	Meinhardt Rd	2	AC	E 2	800	34		27,344	94	0	100	0	12/15/2025	Surface Treatment - Slurry Seal	3/1/2012
95	1590	Brittany Cir	Colonial Dr	End	5	AAC	E 2	150	25		6,456	94	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
320	4950	Janice St	Oasis Av	End	4	AC	E 2	550	33		21,017	94	0	100	0	1/19/2026	Cold Mill and Overlay	10/20/2008
452	6820	Nola St	Hazard Av	Jennrich Av	4	AAC	E 2	1,050	33		35,398	94	0	69	31	1/20/2026	Surface Reconstruction - AC	12/24/2010
462	6970	Oberlin Ave	Rochester St	Newland St	5	AAC	E 2	600	37		22,469	94	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
582	8720	Stahov Ave	Cedar St	End	3	AAC	E 2	760	33		28,573	94	0	100	0	12/26/2025	Overlay - AC Structural	3/25/2010
702	10580	Yuma Pl	Apache Rd	End	2	AC	E 2	282	33		11,188	94	0	90	10	12/16/2025	Cold Mill and Overlay	3/10/2011
652	9720	Walt St	Edwards St	Wynn St	2	AC	E 2	495	33		17,535	94	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
703	10590	Zuni Pl	Apache Rd	End	2	AC	E 2	282	33		11,401	94	0	90	10	12/16/2025	Cold Mill and Overlay	3/10/2011
135	2200	Chaucer Cir	Channing Ave	End	5	AC	E 2	120	27		5,829	94	0	62	38	1/26/2026	2" Conventional Overlay	11/2/2015
249	3720	Furman Ave	Redlands St	End	5	AAC	E 2	1,100	36		30,079	94	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
423	6320	Mills Cir	Oberlin Av	End	5	AAC	E 2	350	36		13,147	94	0	88	12	1/9/2026	Overlay - AC Structural	1/1/2020
528	7910	Riata St	Jennrich Ave	End	4	AAC	E 2	300	34		12,525	94	0	100	0	1/20/2026	Surface Treatment - Slurry Seal	4/28/2014
537	8065	Rockview Cir	Redlands St	Monroe St	5	AC	E 2	210	37		7,504	95	0	100	0	1/9/2026	New Construction - Initial	1/1/1980
89	1510	Bowen St	Mast Ave	Stern Ave	6	AAC	E 2	750	33		23,537	95	0	100	0	1/28/2026	Surface Reconstruction - AC	9/6/2011
123	2030	Carnegie Ave	Newland St	Redlands St	5	AAC	E 2	1,150	37		52,764	95	0	91	9	1/9/2026	Overlay - AC Structural	1/1/2020
432	14150	Monroe St	McFadden Ave	Worthy Dr	5	AC	E 0	1,155	33		35,357	95	38	62	0	1/9/2026	New Construction - Initial	1/1/1990
654	11115	Ward St Frontage Rd	Florence Av	End	6	AC	E 2	490	35		15,136	95	0	100	0	1/27/2026	New Construction - Initial	1/1/1980
131	2150	Champion Ave	Yarborough St	End	5	AC	E 2	455	32		16,588	95	0	100	0	1/26/2026	2" Conventional Overlay	11/2/2015
132	2160	Channing Ave	Yarborough St	Magnolia St	5	AC	E 2	450	36		17,317	95	0	100	0	1/26/2026	2" Conventional Overlay	11/2/2015
348	5400	La Pat Ct	La Pat Pl	End	2	AC	E 2	314	28		9,216	95	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
527	7900	Revere Dr	Hazard Av	Williamsburg Av	5	AAC	E 2	450	33		14,656	95	0	100	0	1/26/2026	Overlay - AC Structural	12/30/2013
549	8700	Saint Marys Cir	University St	End	1	AC	E 2	537	33		19,887	95	0	100	0	11/19/2025	2" Conventional Overlay	4/21/2016
607	9040	Taos Pl	Apache Rd	End	2	AC	E 2	289	33		11,196	95	0	100	0	12/16/2025	Cold Mill and Overlay	3/10/2011
692	10440	Wynn St	Walt St	Sunside Av	2	AC	E 2	250	33		10,151	95	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
112	1880	Caltech Cir	Oberline Av	End	5	AAC	E 2	350	36		13,602	95	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
529	7960	Richardson Wy	21st St	24th St	4	AC	E 2	750	33		24,472	95	88	12	0	1/6/2026	Surface Treatment - Slurry Seal	11/30/2022
535	8040	Rochester St	Furman Av	End	5	AAC	E 2	600	36		21,952	95	0	100	0	1/9/2026	Overlay - AC Structural	1/1/2020
683	90062	Willow Ln	Westminster Blvd	South End	2	AC	C 2	580	37		21,860	95	0	100	0	12/17/2025	New Construction - Initial	1/1/1980
65	1050	Benchley Cir	Parkview Av	End	6	AAC	E 2	550	33		18,648	95	0	100	0	1/28/2026	Overlay - AC Structural	9/15/2023
183	2840	Danborough St	Melric Ave	Cunningham Ave	6	AC	E 2	750	35		23,454	96	72	0	28	1/21/2026	New Construction - Initial	1/1/1980
598	8930	Sunside Ave	Edwards St	Wynn St	2	AC	E 2	470	34		17,055	96	0	100	0	12/17/2025	2" Conventional Overlay	4/21/2016
307	4720	Ida Wy	Abraham Ave	California Ave	2	AAC	E 2	661	33		23,725	96	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
444	6630	Natoma Ave	Coronado St	Clemente St	5	AAC	E 2	282	33		9,417	96	0	0	100	1/14/2026	Overlay - AC Structural	7/30/2023
99	1700	Brooklawn Dr	Iowa St	Chestnut St	3	AC	E 2	737	33		25,869	96	0	1	99	2/19/2026	New Construction - Initial	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
431	6420	Monroe Ln	Hazard	End	4	AC	E	2	1,050	33	34,774	96	0	100	0	1/19/2026	Cold Mill and Overlay	10/20/2008
133	290	21st St	Hospital Cir	Hoover St	4	AC	C	2	691	36	28,021	97	0	100	0	1/5/2026	Surface Treatment - Slurry Seal	11/30/2022
114	1910	Camelia Ln	Carnation Dr	Lotus Dr	6	AAC	E	2	544	33	19,692	97	0	100	0	1/20/2026	Overlay - AC Structural	2/28/2022
481	7342	Palos Verde Ave	Newland St	Skylinks Cir	5	AC	E	2	374	33	14,389	97	100	0	0	1/7/2026	New Construction - Initial	1/1/1980
214	90060	Eden St	Elvira Av	Bolsa Av Frontage Rd	5	AAC	E	2	760	35	23,788	97	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
311	90066	Iowa St	Wyoming St	North End	3	AC	E	2	170	26	4,443	97	0	100	0	1/6/2026	New Construction - Initial	1/1/1980
19	450	Abraham Ave	Willow Ln	Ida Wy	2	AAC	E	2	300	33	13,070	97	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
178	2790	Cunningham Ave	Ward St	Pickford St	6	AC	E	2	1,445	36	52,952	97	0	0	100	1/21/2026	Cold Mill and Overlay	2/8/2010
443	6610	Natal Dr	Iowa St	Cedar St	3	AC	E	2	1,014	33	35,757	97	0	82	18	12/26/2025	New Construction - Initial	1/1/1980
436	6510	Montrose Ave	Eden St	End	5	AC	E	2	1,200	33	41,573	97	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
446	6710	Neece St	Bolsa Ave Frontage Rd	Elvira Av	5	AC	E	2	700	33	22,752	97	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
481	7340	Palos Verde Ave	Skylinks Cir	Burning Tree St	5	AC	E	2	1,570	33	57,476	97	0	100	0	1/7/2026	New Construction - Initial	1/1/1980
220	3420	Elvira Ave	Hunter Ln	End	5	AC	E	2	1,400	35	48,404	97	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
475	7200	Oxford Cir	Nottingham Av	End	6	AC	E	2	200	33	7,525	97	0	100	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
138	2240	Cherry St	21st St	Westminster Ave	3	AC	E	2	1,233	36	44,400	98	0	76	24	1/6/2026	Surface Treatment - Slurry Seal	7/13/2011
612	9090	Texas St	Iowa St	Olive St	3	AC	E	2	160	40	6,696	98	0	100	0	1/6/2026	New Construction - Initial	1/1/1980
693	10460	Wyoming St	Iowa St	Olive St	3	AC	E	2	204	36	6,538	98	0	100	0	1/6/2026	New Construction - Initial	1/1/1980
18	440	Abington Cir	End	Parkview Ave	6	AAC	E	2	550	33	18,809	98	0	100	0	1/28/2026	Overlay - AC Structural	9/15/2023
214	3200	Eden St	Natoma Ave	Montrose Ave	5	AC	E	2	300	33	8,955	98	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
464	7031	Olive St	Brooklawn Dr	End	3	AC	E	2	270	33	11,693	98	0	35	65	1/2/2026	New Construction - Initial	1/1/1980
111	1860	California Ave	Ida Wy	Willow Ln	2	AAC	E	2	289	33	9,723	98	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
311	4800	Iowa St	Natal Dr	Brooklawn Dr	3	AC	E	2	1,176	33	39,374	98	0	100	0	2/19/2026	New Construction - Initial	1/1/1980
105	1770	Busby Cir	Rochelle Ave	End	2	AAC	E	2	170	33	7,416	98	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
418	6240	Middleborough St	Melric Av	Tennyson Av	6	AC	E	2	620	35	19,946	98	0	100	0	1/22/2026	New Construction - Initial	1/1/1980
501	7560	Pine St	Bestel Av	Stahov Av	3	AC	E	2	233	34	7,989	99	0	100	0	12/26/2025	New Construction - Initial	1/1/1980
54	940	Barker Cir	Rochelle Ave	End	2	AAC	E	2	215	33	9,073	99	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
370	5660	Locust St	21st St	Westminster Av	3	AAC	E	2	1,230	36	43,092	99	0	100	0	1/6/2026	Overlay - AC Structural	2/28/2022
434	6490	Montgomery Dr	Milan Av	Westminster Av	1	AAC	E	2	826	38	31,138	99	0	0	100	11/24/2025	Overlay - AC Structural	1/1/2020
534	8020	Rochelle Ave	Willow Ln	Edwards St	2	AAC	E	2	819	33	27,244	99	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
308	4750	Illinois St	Natal Dr	Brooklawn Dr	3	AC	E	2	1,247	34	40,908	99	87	13	0	12/26/2025	New Construction - Initial	1/1/1980
481	7345	Palos Verde Ave	Burning Tree St	End	5	AC	E	2	465	33	17,579	99	0	100	0	1/7/2026	New Construction - Initial	1/1/1980
220	3410	Elvira Ave	Hunter Ln	Coronado St	5	AC	E	2	600	33	20,162	99	0	100	0	1/14/2026	New Construction - Initial	1/1/1980
683	10290	Willow Ln	Westminster Av	Abraham Av	2	AAC	C	2	1,154	32	37,752	99	0	100	0	12/15/2025	Overlay - AC Structural	9/15/2023
31	600	Anawood Wy	Duncannon Ave	Buckingham Cir	1	AC	E	2	1,746	33	57,980	99	0	0	100	12/1/2025	New Construction - Initial	1/1/1980
140	2320	Chestnut St	Trask Ave	Natal Dr	3	AC	E	2	1,672	33	54,715	99	0	51	49	12/26/2025	New Construction - Initial	1/1/1980
311	4801	Iowa St	Brooklawn Dr	End	3	AC	E	2	270	33	12,085	99	0	100	0	1/2/2026	New Construction - Initial	1/1/1980
376	5730	Lutford St	Milan St	End	1	AAC	E	2	351	33	14,183	99	0	63	37	11/24/2025	Overlay - AC Structural	1/1/2020
640	9570	Vassar St	Carlton Av	McFadden Av	3	AAC	E	2	1,146	36	42,039	100	0	0	100	12/10/2025	Overlay - AC Structural	9/15/2023
283	4250	Hammon Pl	Westminster Ave	Harold Pl (City Limit)	1	AAC	C	2	1,234	40	50,800	100	0	100	0	11/24/2025	Overlay - AC Structural	2/28/2022
383	5830	Main St	Chestnut St	Goldenwest St	3	AC	C	2	1,309	53	66,928	100	0	100	0	1/13/2026	New Construction - Initial	1/1/1980
1058	90065	Portsmouth Cir	Fenway Dr	End	3	AAC	E	2	440	36	18,273	100	0	100	0	1/2/2026	Overlay - AC Structural	9/15/2023
5	70	13th St	Cedarwood Ave	Joyce Ave	4	AC	E	2	533	33	17,739	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
6	110	14th St	Cedarwood Ave	End	4	AC	E	2	524	36	16,868	100	0	0	0	1/14/2026	Surface Treatment - Slurry Seal	6/14/2010
46	810	Avon Cir	Nottingham Ave	End	6	AC	E	2	200	33	7,319	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
79	1270	Blackheath Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,570	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
101	1730	Buckingham Cir	Anawood Wy	End	1	AC	E	2	403	33	14,827	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
117	1960	Canterbury Cir	Nottingham Ave	End	6	AC	E	2	200	33	7,544	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
140	2300	Chestnut St	Fenwick Ln	Bolsa Ave	3	AC	C	2	682	42	28,995	100	0	0	0	1/14/2026	New Construction - Initial	1/1/1980
152	2460	Clemente St	Natoma Ave	Whitley St	5	AAC	E	2	1,000	35	30,923	100	0	0	0	1/14/2026	Overlay - AC Structural	7/30/2023
162	2600	Comet Cir	End	Galaxy Dr	1	AC	E	2	500	33	18,481	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
172	2720	Coronado St	Whitley St	Lido Ave	5	AC	E	2	1,203	35	42,446	100	0	0	0	1/14/2026	Unknown Activity	4/1/2009
177	2770	Cumberland Ave	Anawood Wy	Danvers Wy	1	AC	E	2	645	33	22,036	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
178	2780	Cunningham Ave	Pickford St	Brookhurst St	6	AAC	C	2	1,254	36	48,634	100	0	0	0	1/21/2026	Overlay - AC Structural	2/1/2010
184	2850	Danvers Wy	Cumberland Ave	Weymouth Wy	1	AC	E	2	807	33	29,845	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
194	2980	Devonshire Cir	Nottingham Ave	End	6	AC	E	2	200	33	7,078	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
204	3080	Dover Cir	Queenborough St	End	6	AC	E	2	200	32	8,663	100	0	0	0	1/21/2026	New Construction - Initial	1/1/1980
209	3130	Duncannon Ave	Bolsa Chica Rd	Weymouth Wy	1	AC	E	2	1,081	60	70,935	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
209	3140	Duncannon Ave	Weymouth Wy	Milan St	1	AC	E	2	1,466	37	56,025	100	0	0	0	4/28/2026	Overlay - AC Structural	6/14/2010
216	3230	Edinburgh Dr	Cumberland Ave	Hampshire Ave	1	AC	E	2	916	33	32,750	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
225	3470	Emerson Ave	Vassar St	De Paul St	3	AC	E	2	783	33	25,830	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
263	6990	Gleneagles Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,111	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
284	4270	Hampshire Ave	Weymouth Wy	Edinburgh Dr	1	AC	E	2	380	33	12,680	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
305	4680	Hunter Ln	Natoma Ave	Elvira Ave	5	AC	E	2	473	33	15,084	100	0	0	0	1/14/2026	Unknown Activity	1/1/2007
305	4690	Hunter Ln	Bolsa Ave Frontage Rd	Elvira Ave	5	AC	E	2	694	33	23,295	100	0	0	0	1/14/2026	Unknown Activity	1/1/2007
308	4751	Illinois St	Brooklawn Dr	End	3	AC	E	2	270	33	11,722	100	0	100	0	1/2/2026	New Construction - Initial	1/1/1980
330	5110	Joyce Ave	13th St	Pembroke Ln	4	AC	E	2	808	33	28,887	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
333	5140	Jupiter Cir	Mercury Dr	End	1	AC	E	2	450	33	17,538	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
367	5600	Lido Ave	Balboa St	Coronado St	5	AC	E	2	200	35	10,300	100	0	0	0	1/14/2026	Unknown Activity	4/1/2009
386	5890	Maple St	Village Wy	Goldenwest St	3	AC	C	2	995	60	49,809	100	0	0	0	1/13/2026	Surface Treatment - Slurry Seal	1/1/2007
395	6010	Marlborough Cir	Nottingham Av	End	6	AC	E	2	200	33	7,946	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
398	11520	Mars St	Universe Av	End	1	AC	E	2	105	32	3,920	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
414	6200	Mercury Dr	Universe Av	Galaxy Dr	1	AC	E	2	1,100	33	34,007	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
421	6270	Milan St	Duncannon Av	Stratford Av	1	AC	E	2	1,077	33	38,056	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
422	6310	Milky Wy	Galaxy Dr	End	1	AC	E	2	250	33	9,955	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
445	6650	Navajo Dr	Edwards St	Klamath Dr	2	AC	E	2	952	33	63,668	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
445	6660	Navajo Dr	Klamath Dr	Choctaw Dr	2	AC	E	2	1,091	33	517	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
445	6670	Navajo Dr	Choctaw Dr	Springdale St	2	AC	E	2	1,527	33	52,856	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
448	6730	Neptune Cir	Galaxy Dr	End	1	AC	E	2	500	33	18,086	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
458	6890	Nottingham Ave	Ward St	McFadden Av	6	AC	E	2	2,048	37	79,103	100	0	0	0	1/21/2026	Cold Mill and Overlay	2/8/2010
478	7280	Padres St	Natoma Av	Elvira Av	5	AC	E	2	500	35	14,943	100	0	0	0	2/19/2026	Unknown Activity	1/1/2007
491	7450	Pebble Beach Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,719	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
493	7470	Pembroke Ln	Cedarwood Av	Joyce Av	4	AC	E	2	519	33	17,187	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
494	7480	Pensacola St	Bermuda Av	Palos Verdes Av	5	AC	E	2	1,000	36	34,803	100	0	0	0	1/7/2026	New Construction - Initial	1/1/1980
502	7590	Pinehurst Cir	Burning Tree St	End	5	AAC	E	2	450	33	17,472	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
514	7740	Purdy St	Bolsa Av	Elvira Av	5	AC	E	2	800	33	24,836	100	0	0	0	1/14/2026	New Construction - Initial	1/1/1980
518	7810	Queensborough St	Melric Av	Cunningham Av	6	AC	E	2	750	35	23,542	100	0	0	0	1/21/2026	New Construction - Initial	1/1/1980
520	7830	Radcliff Cir	Queensborough St	End	6	AC	E	2	200	33	8,454	100	0	0	0	1/21/2026	New Construction - Initial	1/1/1980
536	8060	Rockmont Ave	Vassar St	Vermont St	3	AAC	E	2	1,185	33	39,870	100	0	0	0	12/10/2025	Overlay - AC Structural	9/15/2023
569	8440	Siena Ave	Vassar St	Vermont St	3	AC	E	2	1,010	33	32,662	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
574	8530	Skylinks Cir	Palos Verde Av	End	5	AAC	E	2	200	33	7,819	100	0	0	0	1/7/2026	Overlay - AC Structural	9/15/2023
594	8860	Stratford Ave	Buckingham Cir	Milan St	1	AC	E	2	685	34	24,121	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
618	9200	Tiverton Cir	Montgomery Dr	End	1	AAC	E	2	254	34	10,272	100	0	0	0	11/24/2025	Overlay - AC Structural	1/1/2020
633	9430	Universe Ave	Venus Dr	Newland St	1	AC	E	2	900	33	30,313	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
633	9440	Universe Ave	Venus Dr	Magnolia St	1	AC	E	2	1,300	33	43,277	100	0	0	0	5/23/2026	Overlay - AC Structural	5/23/2026
643	9600	Vermont St	Carlton Av	Rutgers Av	3	AAC	E	2	1,059	38	39,100	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/2020
643	9610	Vermont St	Carlton Av	Sienna Av	3	AC	E	2	581	38	23,787	100	0	0	0	4/28/2026	Overlay - AC Structural	1/1/1980
643	9611	Vermont St	McFadden Av	Rockmont Av	3	AC	E	2	170	33	6,079	100	0	0	0	12/10/2025	New Construction - Initial	1/1/1980
643	9615	Vermont St	Sienna Av	Rockmont Av	3	AAC	E	2	756	38	26,514	100	0	0	0	4/28/2026	Overlay - AC Structural	9/15/2023
660	9790	Webber Pl	13th St	Pembroke Ln	4	AC	E	2	813	33	27,528	100	0	0	0	1/14/2026	Unknown Activity	6/14/2010
674	10150	Weymouth Wy	Stratford Av	Duncannon Av	1	AC	E	2	1,465	33	48,288	100	0	0	0	12/1/2025	New Construction - Initial	1/1/1980
679	10200	Whitley Ave	Newland St	Coronado St	5	AC	E	2	400	35	16,015	100	0	0	0	1/14/2026	Unknown Activity	4/1/2009
693	10465	Wyoming St	Olive St	Cherry St	3	AAC	E	2	838	33	28,916	100	0	0	0	1/6/2026	Overlay - AC Structural	7/30/2023
693	10470	Wyoming St	Cherry St	Goldenwest St	3	AAC	E	2	1,095	36	39,423	100	0	0	0	1/6/2026	Overlay - AC Structural	7/30/2023
699	10540	Yorkshire Cir	Nottingham Av	McFadden Av	6	AC	E	2	200	33	7,120	100	0	0	0	1/21/2026	Surface Treatment - Slurry Seal	6/14/2010
									127.0		23,722,970							
		Alleys																
1002	90003	Alley 03	Colonial Dr	End	5	AC	O	2	100	20	2,112	8	64	28	8	3/30/2026	New Construction - Initial	1/1/1980
1026	90027	Alley 27	Goldenwest St	End	3	AC	O	2	600	20	12,081	17	61	39	0	3/25/2026	New Construction - Initial	1/1/1980
1003	90004	Alley 04	Sherwood	End	1	AC	O	2	100	20	2,718	25	86	14	0	3/25/2026	New Construction - Initial	1/1/1980
1033	90034	Alley 34	Jackson St	End	4	AC	O	2	161	15	2,019	29	70	28	2	3/24/2026	New Construction - Initial	1/1/1980
1027	90028	Alley 28	Sowell Ave	End	3	AC	O	2	150	20	2,059	43	94	6	0	2/20/2026	Cold Mill and Overlay	10/20/2008
1041	90043	Alley 43	Newland St	Westminster Ave	4	AC	O	2	700	20	11,220	47	73	27	0	3/24/2026	Unknown Activity	1/1/2007
1031	90032	Alley 32	15th St	16th St	4	AAC	O	2	350	15	3,230	55	73	27	0	3/24/2026	Surface Reconstruction - AC	2/8/2010
1043	90045	Alley 45	Bushard St	Swallow Ln	6	AC	O	2	800	20	12,197	56	73	27	0	1/13/2026	New Construction - Initial	1/1/1980
1022	90023	Alley 23	Bolsa Frontage Rd	End	5	AC	O	2	550	20	8,206	58	89	11	0	1/19/2026	Cold Mill and Overlay	10/20/2008
1018	90019	Alley 19	Magnolia St	End	5	AAC	O	2	800	20	13,723	59	88	12	0	1/19/2026	Overlay - AC Structural	10/20/2008
1047	90049	Alley 49	Westate	Bishop Pl	6	AC	O	2	1,300	20	18,292	61	73	27	0	1/14/2026	Cold Mill and Overlay	10/20/2008
1048	90050	Alley 50	Westate	Bishop Pl	6	AAC	O	2	1,300	20	15,567	63	88	12	0	1/19/2026	Surface Reconstruction - AC	9/6/2011
1029	90030	Alley 30	Van Buren St	Van Buren St	5	AC	O	2	650	25	11,852	63	74	25	1	1/21/2026	Unknown Activity	1/1/2007
1052	90054	Alley 54	Madison Ave	Roosevelt Ave	3	AC	O	2	600	15	5,643	65	60	40	0	2/26/2026	Unknown Activity	1/1/2007

City of Westminster, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	Zone	Surface Type	Rank	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work Date
1044	90046	Alley 46	Springdale St	End	2	AAC	0	2	2,200	20	35,147	69	87	13	0	2/26/2026	Surface Reconstruction - AC	5/15/2008
9200	14020	Alley S/McFadden Ave	Monroe St	Wilson St	5	AC	0	0	565	20	8,026	70	68	0	32	1/9/2026	New Construction - Initial	1/1/1990
1024	90025	Alley 25	Santee Ave	Sowell Ave	2	AAC	0	2	650	20	13,098	71	13	87	0	2/20/2026	Surface Reconstruction - AC	2/8/2010
1049	90051	Alley 51	Willow Ln	Edwards St	2	AC	0	2	800	20	14,292	72	89	10	1	2/25/2026	Unknown Activity	1/1/2007
1016	90017	Alley 17	McFadden Ave	Carnation Dr	6	AC	0	2	750	20	12,305	74	81	13	6	1/19/2026	Unknown Activity	1/1/2007
1042	90044	Alley 44	Pegg St	Sherwood St	1	AAC	0	2	547	20	8,111	77	60	40	0	2/26/2026	Overlay - AC Structural	4/28/2014
1034	90035	Alley 35	Beach (n/o Westminster)	Monroe St	4	AC	0	2	1,250	20	12,848	77	62	19	19	2/26/2026	Cold Mill and Overlay	10/20/2008
1051	90053	Alley 53	Adams St	Washington Ave	3	AC	0	2	620	15	6,579	78	62	38	0	2/26/2026	New Construction - Initial	1/1/1980
1025	90026	Alley 26	Rochelle	End	2	AC	0	2	360	20	4,626	80	0	57	43	2/25/2026	Unknown Activity	1/1/2008
1040	90042	Alley 42	Kiowa Rd	Garden Grove Blvd Frontage Rd	2	AC	0	2	1,519	20	24,738	81	21	79	0	4/1/2026	New Construction - Initial	1/1/1980
1014	90015	Alley 15	Nevada St	Arizona St	4	AC	0	2	350	15	4,920	83	39	44	17	4/1/2026	Unknown Activity	1/1/2008
1015	90016	Alley 16	Oakcliff	Bushard St	6	AC	0	2	1,477	20	22,398	83	39	61	0	1/19/2026	Unknown Activity	1/1/2007
9100	14000	Alley N/McFadden Ave	Cedarwood Ave	Pacific St	4	AC	0	0	611	20	13,650	83	31	69	0	2/26/2026	New Construction - Initial	1/1/1990
1050	90052	Alley 52	Arizona St	End	4	AC	0	2	300	15	3,368	84	0	96	4	4/1/2026	Unknown Activity	5/15/2008
1011	90012	Alley 12	15th St (W/ Newland)	15th St	4	AC	0	2	1,000	30	25,533	85	26	69	5	3/24/2026	Unknown Activity	1/1/2007
1012	90013	Alley 13	Arizona St	23rd St	4	AC	0	2	550	20	9,507	85	45	55	0	4/1/2026	Unknown Activity	1/1/2007
1038	90040	Alley 40	La Pat Pl	Nancy Lee Dr	2	AC	0	2	750	20	15,316	85	66	13	21	2/25/2026	Cold Mill and Overlay	10/20/2008
1000	90001	Alley 01	11th St	16th St	4	PCC	0	2	1,462	15	20,232	86	46	49	5	2/26/2026	New Construction - Initial	1/1/1980
1036	90037	Alley 37	Dillow St (W/O)	Kramer St	5	AC	0	2	650	20	11,567	86	70	30	0	2/25/2026	New Construction - Initial	1/1/1980
1045	90047	Alley 47	Meinhardt Rd	Iroquois Rd	2	AAC	0	2	1,700	20	27,999	87	30	70	0	3/25/2026	Surface Reconstruction - AC	5/15/2008
1032	90033	Alley 33	19th St	20th St	4	AC	0	2	250	15	2,857	88	0	27	73	2/26/2026	Unknown Activity	1/1/2008
1021	90022	Alley 22	Natal Dr	Natal Dr	3	AC	0	2	1,081	20	17,795	89	0	41	59	2/19/2026	New Construction - Initial	1/1/1980
1035	90036	Alley 36	Dillow St (E/O)	Kramer St	5	AAC	0	2	650	20	12,488	90	55	45	0	2/25/2026	Surface Reconstruction - AC	2/8/2010
1001	90002	Alley 02	Arizona St	End	4	AC	0	2	550	20	8,483	91	21	75	4	4/1/2026	Unknown Activity	1/1/2007
1005	90006	Alley 06	Pacific	Cedarwood	3	AC	0	2	1,000	20	9,687	91	57	37	6	1/20/2026	New Construction - Initial	1/1/1980
1004	90005	Alley 05	Frances St	Hammon Pl	1	AC	0	2	300	20	6,212	92	26	74	0	2/26/2026	New Construction	1/1/1980
1053	90055	Alley 55	Madison Ave	Kennedy St	5	AC	0	2	175	20	2,064	92	0	100	0	1/27/2026	Surface Treatment - Slurry Seal	1/1/2019
1017	90018	Alley 18	Purdy St	End	4	AAC	0	2	650	20	11,470	92	0	100	0	2/25/2026	Surface Reconstruction - AC	12/24/2010
1010	90011	Alley 11	19th St	Alley 35	4	AC	0	2	407	15	4,440	93	0	61	39	2/26/2026	Unknown Activity	1/1/2007
1023	90024	Alley 24	Nola St	End	4	AAC	0	2	250	20	4,475	93	0	100	0	2/25/2026	Surface Reconstruction - AC	2/8/2010
1039	90041	Alley 41	La Pat Pl	La Pat Ct	2	AC	0	2	400	20	6,501	94	0	93	7	2/25/2026	Cold Mill and Overlay	10/20/2008
1020	90021	Alley 21	Moran St	Castle St	4	AAC	0	2	400	20	6,566	94	0	82	18	2/19/2026	Overlay - AC Structural	10/20/2008
1009	90010	Alley 10	10th St	11th St	4	AC	0	2	250	15	4,660	96	0	100	0	2/26/2026	New Construction - Initial	1/1/1980
1013	90014	Alley 14	Hoover St	End	3	AAC	0	2	600	20	8,998	96	0	100	0	2/19/2026	Overlay - AC Structural	10/20/2008
1030	90031	Alley 31	Washington Ave	Madison Ave	3	AC	0	2	600	15	6,814	96	0	65	35	2/26/2026	New Construction - Initial	1/1/1980
1028	90029	Alley 29	Thorpe Ave	End (w/o Eden)	5	AAC	0	2	1,800	20	29,872	98	0	0	100	1/13/2026	Overlay - AC Structural	7/30/2023
1008	90009	Alley 09	Pegg	End	1	AC	0	2	200	15	5,680	99	0	100	0	2/26/2026	New Construction - Initial	1/1/1980
1037	90039	Alley 39	Dana Cir	End (Parallel to Drey)	1	AAC	0	2	600	20	8,667	99	0	100	0	2/20/2026	Overlay - AC Structural	9/15/2023
1046	90048	Alley 48	Swan St	Bushard St	4	AAC	0	2	550	20	11,167	99	0	100	0	2/19/2026	Overlay - AC Structural	9/15/2023
1006	90007	Alley 07	Cherry St	End	3	AC	0	2	150	20	1,890	100	0	0	0	2/19/2026	New Construction - Initial	1/1/1980
1007	90008	Alley 08	Pine	Cherry	3	AC	0	2	800	20	12,936	100	0	0	0	2/19/2026	New Construction - Initial	1/1/1980
									7.2		598,901							

XIII. APPENDIX C – GIS DIGITAL DATA

Introduction

The OCTA GIS Section maintains a spatial inventory of transportation infrastructure which mostly consists of major arterial streets, roads, and highways. A key component of road information is pavement condition. Maintaining an inventory of pavement condition will enhance OCTA’s GIS visualization and analysis capabilities and assist in understanding the transportation investment needs throughout the region. Therefore, a GIS dataset in digital format should be included in this report.

Structure of GIS Data

The GIS dataset must consist of linear geographic features that represent road/street segments. All segments that are part of the report should be included in the GIS dataset. The attribute information of each segment should generally follow the format of the Complete Listing of Current Street Conditions in Appendix B above.

The GIS data requirements are discussed below. Most commercial and open-source GIS software provide industry-standard tools to manage GIS data to meet these requirements.

GIS Digital Data Format

The GIS data must be submitted in either one of the following formats:

- Esri Shapefile, or
- Esri File Geodatabase

Metadata

The GIS data are required to have associated metadata. The minimum metadata items required are:

- Title of Dataset
- Tags (A set of words that can be used by GIS to search for the resource. For example: “pavement”, “transportation”, “roads”)
- Summary (A brief purpose statement of the dataset)
- Description (A brief narrative of the dataset’s content)
- Credits (A recognition of those who created or contributed to the resource)

Spatial Geometry Type

The spatial geometry of the segment features must be lines that represent the roadway centerline as accurately as possible.

Projection

The GIS data must have spatial reference information and have its coordinate system identified and embedded in or associated with the data file(s). All GIS data submitted to OCTA should be in the following projected coordinate system:

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

- NAD 1983 State Plane California VI FIPS 0406 (US Feet) - More information about this system can be found at: <https://spatialreference.org/ref/epsg/nad83-california-zone-6-ftus/>

GIS Feature Attributes

The required segment attributes are:

- Street name
- Unique segment identifier (Segment ID from original source if available)
- Name of intersecting road at the beginning of a segment
- Name of intersecting road at the end of the segment
- Current pavement condition index (PCI)
- Current PCI inspection date
- Length of road segment in feet
- Width of road segment in feet
- Paved area of road segment in square feet or square yards
- Projected PCI at end of Seven-Year Road Maintenance and Rehabilitation Plan

Additional attributes such as number of through travel lanes, direction of travel and pavement surface type may be provided.

XIV. APPENDIX D – QUALITY ASSURANCE / QUALITY CONTROL PLAN

Introduction

When performing data collection in any field, the need for quality control is paramount as it is essential for accurate planning, analysis and design. This is particularly true for collecting pavement distress data for a pavement management program.

The Quality Assurance / Quality Control (QA/QC) Plan establishes minimum quality standards for performance and procedures for update of the pavement management program.

Objectives

This document constitutes a formal QA/QC Plan for the City of Westminster. It was prepared on March, 2018 and last revised in April, 2026.

Specifically, it is intended for the 2026 Pavement Management Plan Update. The focus is on the collection of network-level pavement distress data (defined by National Cooperative Highway Research Program (NCHRP) Synthesis 401 Quality Management of Pavement Data Collection, as “Network-level data collection involves collection of large quantities of pavement condition data, which is often converted to individual condition indices or aggregated into composite condition indices”).

This document also addresses the QA/QC plan requirements of the Orange County Transportation Authority (OCTA)’s “Countywide Pavement Management Plan Guidelines” (Section 2.4), adopted in May 2010.

Structure of QA/QC Plan

The following components are addressed in this QA/QC Plan:

- Condition survey procedures used;
- Accuracy required for data collection;
- Inspector qualifications and experience; and
- Safety.

Condition Survey Procedures

The governing document in performing condition surveys for the City of Westminster is ASTM D6433-16 “Standard Practice for Roads and Parking Lots Pavement Condition Index (PCI) Surveys.” Both asphalt concrete (AC) and Portland cement concrete (PCC) pavements are included in this protocol. The following distresses are collected for each pavement type:

2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026

Asphalt Concrete	Portland Cement Concrete (Jointed)
1. Alligator (fatigue) cracking	1. Blow-up/Buckling
2. Bleeding	2. Corner Breaks
3. Block Cracking	3. Divided Slab
4. Bumps and sags	4. Durability ("D") Cracking
5. Corrugation	5. Faulting
6. Depression	6. Joint Seal damage
7. Edge Cracking	7. Lane/Shoulder Drop-off
8. Joint Reflection Cracking	8. Linear Cracking
9. Lane/Shoulder Drop-off	9. Patching (large) and Utility Cuts
10. Longitudinal & Transverse Cracking	10. Patching (small)
11. Patching and Utility Cut Patching	11. Polished Aggregate
12. Polished aggregate	12. Popouts
13. Potholes	13. Pumping
14. Railroad Crossing	14. Punchout
15. Rutting	15. Railroad Crossing
16. Shoving	16. Scaling, map cracking and crazing
17. Slippage Cracking	17. Shrinkage Cracks
18. Swell	18. Spalling (corner)
19. Weathering	19. Spalling (joint)
20. Raveling	

As required by the Orange County Transportation Authority (OCTA), the City of Westminster must prepare and implement a quality assurance / quality control (QA/QC) plan regarding pavement management inspection as they pertain to MicroPAVER. For the purposes of this report, Bucknam has demonstrated below how our project team implemented QA/QC procedures during the project.

Our QA/QC plan focuses on the how each pavement inspection is performed, what distresses are collected and ensures that it complies with the OCTA guidelines defined within the "Countywide Pavement Management Plan Guidelines (CPMPG)".

As shown within the OCTA (CPMPG), our staff followed and delivered on the requirements stated within Chapter 2, page 2-5 which require specific QA/QC data (Items A through G). Additionally, Chapter 3 requires numerous data/deliverables from local agencies for OC Go eligibility. All general PCI budgetary report submittals will follow the Chapter 3 guidelines.

In conjunction with the outlined items within the CPMPG Section 2 we have summarized our QA/QC procedures below:

- a. **Descriptions of condition survey** - Our staff follows the required Condition Survey Protocols (CPMPG, Chapter 2); our staff assesses each pavement section for the minimum distresses outlined within Chapter 2, page 2-1. Additionally, based on the pavement conditions found, we collect all MicroPAVER/StreetSaver Army Corps of Engineers (USACE) distresses, if found within

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

the sample sections; for example, if slippage cracking, potholes, etc. are found our survey technicians record the proper information.

- b. **How data was collected** - Our surveys follow the OCTA accepted walking requirements. All sections that our staff surveys are performed through the walking method, approximately 10% of all sections surveyed were complemented with windshield surveys based on unique conditions found. Our staff physically measures the width of every section as well as measure for any square footage adjustment that need to be added or taken away from a sections “true area” (i.e. cul-de-sac, bus pads, street width variances, etc.). Samples taken always include a minimum of 2,500 SF coverage unless specific section limits prohibit this. Arterial section samples utilize a 3,500 SF sample size due to the larger section area (this is within the ASTM D6433-16 sample size calculation. Field crews typically include one individual for residential pavement sections while Arterial (MPAH) routes utilize a two-person crew for safety, traffic control and increases quality control.
- c. **Accuracy required for data collection** - We use a statistical sampling approach for measuring the quality of our field technician’s work. In this manner, 10 percent of the original surveys are re-surveyed by a different survey crew than the original, supervised by a field supervisor, and the results are compared to the original surveys. Our QC process involves checking the field crews’ work in a “blind study” fashion. Quality control checks are performed at the end of each survey week. This ensures that all field personnel are properly collecting section samples, distress types and distress severities for all street segments.
- ❖ When QA/QC issues are found, our staff documents the issues within MicroPAVER’s user interface. If distress types found are not within the 97% accuracy our QA/QC is expanded beyond our minimum 10% resurvey to 20% of the original survey
- d. **Random and Systematic Re-Inspections** – As described above our staff re-inspects, as a minimum, 10% of the original survey (OCTA only requires 5%). Per the agencies requests, our staff will submit PCI reports to the agency as project status reports for their review. Agencies will typically review specific pavement sections for PCI accuracy based on recent overlay or slurry seal maintenance; this serves as an initial accuracy check on our surveys (outside Bucknam QC efforts). Additionally, our staff performs “ride-a-long” surveys with local agency staff to build consensus on how our MicroPAVER/StreetSaver USACE surveys are performed, recorded and reported on.

Random re-inspections will include a representative selection across the following categories:

- Functional classed (i.e. MPAH, locals);
- Surface types (e.g. AC or PCC);
- Pavement conditions (e.g. good, fair, poor);
- Inspectors;
- Geographical areas, if applicable.

For systematic re-inspections, this could be due to noticed trends such as specific treatment types (e.g. open-graded mixed), a specific inspector or geographical area. In these cases Bucknam continues to utilize a 10% re-inspection policy.

2026 Citywide Pavement Management Plan – OCTA Submittal Final Report – June 17, 2026



- e. **PCI Comparison with Past Surveys** - if previous inspection data is available, new PCI's calculated through the most recent inspections will be compared to previous PCI's. If the variance in PCI is greater than +/- 10 PCI points, these sections will be flagged for further investigation and/or re-inspection (In the cases that a PCI increases or decreases by 10 points follows the established CPMPG guidelines; Appendix A, page A-18).
- f. **Schedule of data submittal** – Pending on the City's last major PMP submittal, Bucknam will assist the agency in submitting the following:
- ❖ Master Plan of Arterial Highways (MPAH) routes will be surveyed and reported on at least once every two years
 - ❖ Local streets will be surveyed and reported on every six years
 - ❖ Corresponding MPAH and local PCI reporting and budgetary reporting will be submitted every two years
- g. **Inspector's Qualification and Experience**– Bucknam staff have been trained on the use of StreetSaver and the segment calibration/verification and inspection practices. Mr. Peter Bucknam (Project Manager) has completed the MicroPAVER Certification of Professional Development courses. All Bucknam field technicians are trained using the ASTM D6433 survey methodologies and have passed OCTA's prequalification testing every year since 2010. Bucknam Infrastructure Group inspectors have attended formal training on pavement condition distress surveys. This training was conducted prior to performing any work using the ASTM D6433 protocols, consistent with OCTA's requirements.

Inspector Name	Role (Field Inspector or QA/QC Reviewer or Both)	Date of ASTM D6433 Training	Training Conducted By:	OCTA Pre-Qualification		
				Active (Y/N)	Expiration Date	Certificate Provided with this Report (Y/N)
Cade Bucknam	Both	June, 2025	Bucknam - Internal	Y	6/30/27	Y
Chris Campbell	Field Inspector	February, 2026	Bucknam - Internal	Y	6/30/28	Y
Aaron Cohodas	Both	July, 2024	Bucknam - Internal	Y	7/30/26	Y
Avery Brinkley	Field Inspector	June, 2025	Bucknam - Internal	Y	6/30/27	Y

Attachments – Inspectors Certifications

- Certificate of Prequalification – OCTA Pavement Inspector Prequalification Program (see below):

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

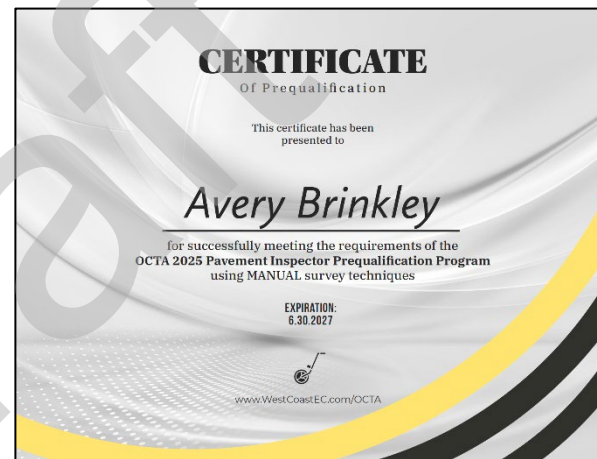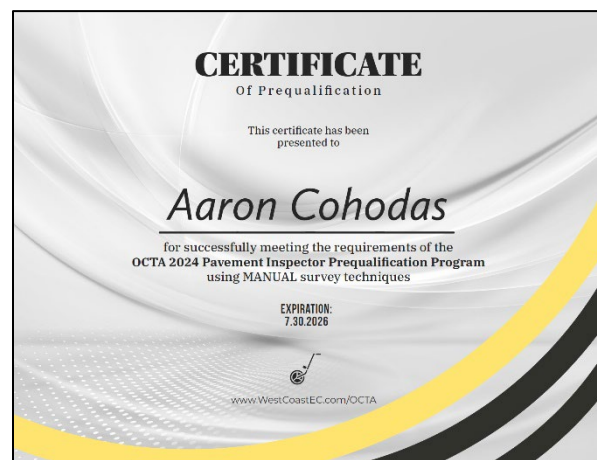

Safety procedures – Bucknam field survey techniques utilize the following procedures:

- All vehicles are properly marked or flagged with appropriate sign markings indicating that a "PAVEMENT SURVEY IS IN PROGRESS"
- All vehicles have the proper flashing amber light beacons placed on the top of the vehicle to allow for proper visibility and line-of-site warning
- Large MPAH routes are surveyed using two field technicians to increase traffic control warning and safety
- While parking or stopping along the survey route, vehicles legally park within the right-of-way or use a parking lot
- All field technicians wear ANSI – 105 Class II safety vests

**2026 Citywide Pavement Management Plan – OCTA Submittal
Final Report – June 17, 2026**

XV. APPENDIX E – PAVEMENT MANAGEMENT DATA FILES

The City of Westminster MicroPAVER database (.e70 file) has been enclosed for City and OCTA use. This data and the associated reporting data includes:

- Street names and limits for the City's public streets
- Street identifiers (Branch ID, Section ID)
- Direction
- Begin and end of section
- Length, width and true areas
- Functional Classification (MPAH, Local)
- Number of travel lanes
- Pavement Condition Index (PCI) and date of inspection
- Type of recommended treatment
- Cost of recommended treatment

Draft

XVI. APPENDIX F – GIS MAPS / CURRENT CONDITIONS

